

















Features

- · Universal AC input / Full range
- · Fanless design, 400W convection
- · Modular design, optional configuration available
- Slim and 1U low profile
- · No minimum load required
- Protections: Short circuit / Overload / Over voltage / Over temperature
- -30 ~ +70°C working temperature
- · LED indicator for power on
- 3 years warranty


Applications

- · Diagnostic or biological facilities
- Test or measurement systems
- Telecommunication equipment
- Industrial automation machinery
- Industrial control system
- · Mechanical and electrical equipment

Description

The UMP-400 series is the break-through 1U height modular power supply from MEAN WELL, and it can deliver up to 400W maximum output power with convection cooling only. The front-end can function as an independent 400W 24V or 48V singe output power supply, and it can be configured into a multi-channel modular power supply by incorporating the NID series non-isolated DC-DC converters, which are also standalone standard products that can be purchased and used separately. The NID output modules can deliver up to 100W with adjustable options for the major working voltages used in the industry, including 5V, 12V, 15V and 24V. In addition, the UMP-400 series is certified to ITE 62368-1 safety standards, and is designed to meet medical (2xMOPP) safety standard, thus offering the best flexibility for various types of applications.

Output Configuration Guide (Please contact MEAN WELL sales or distributors for multi-channel configurations)



Example: UMP-400 - 24 B E I				
	Channel 4: NID100-05			
	Channel 3: NID65-05			
	Channel 2: NID35-12			
	Channel 1 (Main O/P): 24V			

X:	DC-DC O/P Module		O/P Voltage	O/P Current	
	Α	NID35-05	5V	3.5A	
	В	NID35-12	12V	2.9A	
	C NID35-15		15V	2.4A	
	D	NID35-24	24V	1.5A	
	E	NID65-05	5V	6.5A	
	F	NID65-12	12V	4.9A	
	G	NID65-15	15V	4.3A	
	Н	NID65-24	24V	2.7A	
	1	NID100-05	5V	8.0A	
	J	NID100-12	12V	6.0A	
	K	NID100-15	15V	5.2A	
	L	NID100-24	24V	3.4A	

DC-DC O/P Module		O/P Current
NID35-05	-5V	-3.5A
NID35-12	-12V	-2.9A
NID35-15	-15V	-2.4A
NID65-05	-5V	-6.5A
NID65-12	-12V	-4.9A
NID65-15	-15V	-4.3A
NID100-05	-5V	-8.0A
NID100-12	-12V	-6.0A
NID100-15	-15V	-5.2A
	NID35-05 NID35-12 NID35-15 NID65-05 NID65-12 NID65-15 NID100-05 NID100-12	NID35-05 -5V NID35-12 -12V NID35-15 -15V NID65-05 -5V NID65-12 -12V NID65-15 -15V NID100-05 -5V NID100-12 -12V


- 1: NID35/65/100-24 modules are intended for UMP-400-48 only.
- 2: Only UMP-400-24 can be configured with negative output voltage modules. 3: Only output channel 4(V4) may be configured as negative voltage.



SPECIFICATION

MODEL		UMP-400-24		UMP-400-48		
	DC VOLTAGE	24V		48V		
	RATED CURRENT	16.7A		8.3A		
	RATED OUTPUT POWER	400W max.		1		
	VOLTAGE ADJ. RANGE	22.8 ~ 25.2V		45.6 ~ 50.4V		
SINGLE OUTPUT	RIPPLE & NOISE (max.) Note.2	240mVp-p		360mVp-p		
(Standard	VOLTAGE TOLERANCE Note.3	±1.0%		±1.0%		
model)	LINE REGULATION	±0.5%		±0.5%		
	LOAD REGULATION	±1.0%		±1.0%		
	SETUP, RISE TIME	1000ms, 50ms/230Vac ; 2000ms, 50ms/115Vac				
	HOLD UP TIME (Typ.)	12ms@230Vac; 12ms@115Vac				
ULTIPLE	DC VOLTAGE	CH1 output 24V or 48V + NID DC	modules for CH2 3.4			
UTPUT Optional Model)		CH2,3,4 output power can be flexi		Combined nower on al	I channals n	nust not exceed 400W
optional model)	VOLTAGE RANGE Note.4	90 ~ 264VAC 127 ~370VDC	bic depending on MD selection	i. Combined power on a	i onamicio n	nust not exoced 40000
	FREQUENCY RANGE	47 ~ 63Hz				
			15\/AC at full load			
MOUT	POWER FACTOR		15VAC at full load			
INPUT		88.5%, full case load with each ty	ype of module at nominal volta	ige		
	AC CURRENT	2.5A/230VAC 4.7A/115VAC				
	INRUSH CURRENT	40A/230VAC 25A/115VAC	24)/AO T	2041/40		
	LEAKAGE CURRENT	Earth leakage current <300uA / 26	94 VAC, TOUCH current <100uA/2	104VAU		
	OVERLOAD	105 ~ 135% rated output power		and the state of t	the OTD	-4
		Protection type CH1: constant cur	rrent limiting protection (If a lor iccup mode protection	ng snort circuit continues	s, the OTP a	ction will be triggered),
PROTECTION		26.4 ~ 31.2V	locap mode proteodon	52.8 ~ 62.4V		
I NOTEOTION	OVER VOLTAGE	Protection type: shut down o/p vo	Itage re-nower on to recover	32.0 02.4V		
	OVER TEMPERATURE	Shut down o/p voltage, re-power of				
		-30 ~ +70°C (Refer to "Derating C				
	WORKING TEMP.	, ,	urve)			
	WORKING HUMIDITY	20 ~ 90% RH non-condensing				
ENVIRONMENT	STORAGE TEMP.	-40 ~ +85°C				
	TEMP. COEFFICIENT	±0.03%/°C (0~50°C)				
	VIBRATION	10~500Hz, 2G 10min./1 cycle, 60 min. each along X, Y, Z axes				
	OPERATING ALTITUDE Note.6	5000 meters /OVCII				
	OVER VOLTAGE GATEGORY	Ⅲ; According to IEC62368-1; a	<u>'</u>			
	SAFETY STANDARDS	EAC TP TC 004; UL62368-1, Dekra	a seal BS EN/EN62368-1 appro	ved; Design refer to ANS	I/AAMI ES60	0601-1, TUV BS EN/EN60601
	ISOLATION LEVEL	IEC 60601-1 (3 rd edition) Primary-Secondary: 2x MOPP, Primary-Earth: 1x MOPP				
	WITHSTAND VOLTAGE	I/P-O/P: 4KVAC I/P-FG: 2KVAC	•			
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG: 100M Ohms / 500VDC / 25°C / 70% RH				
		Parameter	Standard BS EN/EN55032 (CISPR32) / Des	'	(OIODD144)	Test Level / Note Class B
	540 5440010N	Conducted				
	EMC EMISSION	Radiated	BS EN/EN55032 (CISPR32) / Des	ign refer to BS EN/EN55011	(CISPRTI)	Class B
		Harmonic Current	BS EN/EN61000-3-2			Class A
SAFETY &		Voltage Flicker	BS EN/EN61000-3-3			
EMC		BS EN/EN55035; Design refer to	1			
(Note 7)		Parameter	Standard		Test Level /	Note
		ESD	BS EN/EN61000-4-2		Level 4, 8K\	/ air; Level 4, 4KV contact
		RF field	BS EN/EN61000-4-3		Level 3, 3V/	m
	EMO IMMUNITY	EFT/ Burst	BS EN/EN61000-4-4		Level 3, 1K\	/
	EMC IMMUNITY	Surge	BS EN/EN61000-4-5		Level 4, 2K\	//Line-FG; 1KV/Line-Line
		Conducted	BS EN/EN61000-4-6		Level 2, 3V	
		Magnetic Field	BS EN/EN61000-4-8		Level 1, 1A/	m
			DO ENVENIO 4000 4 44		100% dip 1	periods, 30% dip 25 periods,
		Voltage Dips and Interruptions	BS EN/EN61000-4-11			uptions 250 periods
	MTBF	187.26K hrs min. MIL-HDBK-217F (25°C)				
OTHERS	DIMENSION	250*89*37mm (L*W*H)				
	PACKING	0.88Kg; 14pcs/13Kg/0.89CUFT				
NOTE	Ripple & noise are measure Tolerance: includes set up to De-rating may be needed up The efficiency changes by ir The ambient temperature de-	All parameters NOT specifically mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 µf & 47 µf parallel capacitor. Tolerance: includes set up tolerance, line regulation and load regulation. De-rating may be needed under low input voltages. Please check the derating curve for more details. The efficiency changes by installing different output modules. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m (6500 The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by				
		m*450mm metal plate with 3mm	of thickness. The final equipme	ent must he re-contirme	יייזים זו זבמז ח	meets



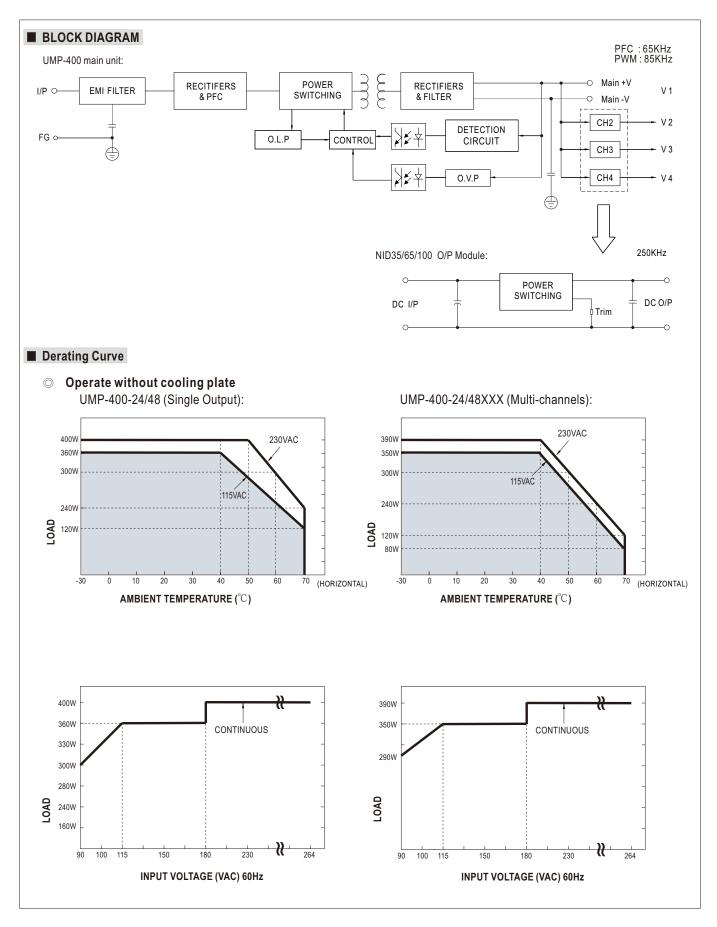




Operate with cooling plate


The UMP can operate under an extended temperature range with the addition of a 450x450x3mm aluminum plate.


Unit:mm

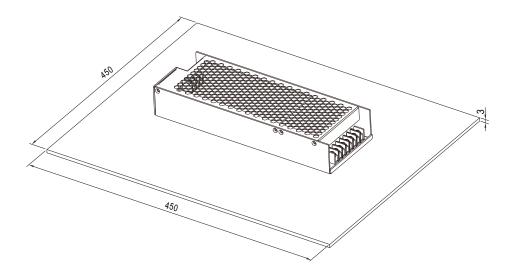



UMP-400-24/48 (Single Output):

UMP-400-24/48XXX (Multi-channels):












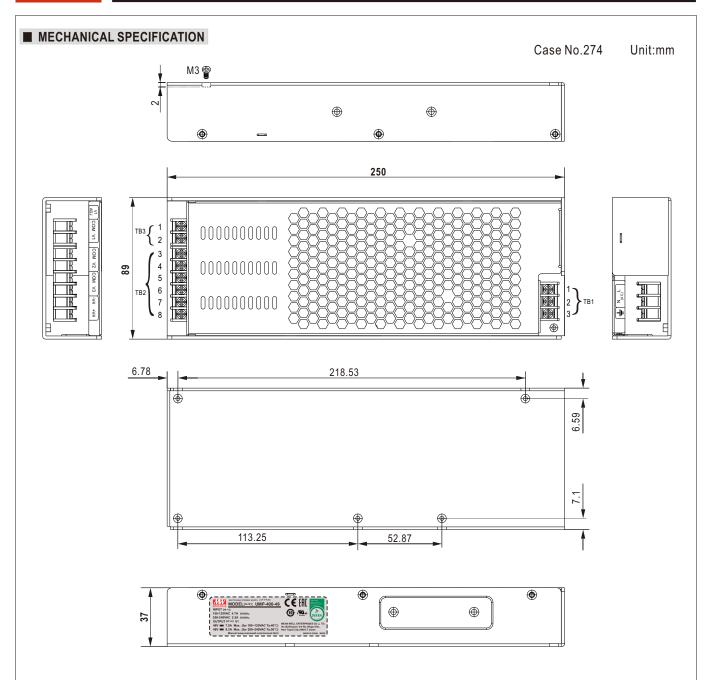

Terminal Pin No. Assignment

TB1

Pin No.	Assignment
1	AC/L
2	AC/N
3	FG ÷

TB3 (Single output UMP-400-24/48)

1 Do (onigic output omi			
Pin No.	Assignment		
1	COM		
2	+V1		

TB2 (Multi-Channels UMP-400-24/48XXX)

Pin No.	Assignment
3	COM
4	+V2
5	COM
6	+V3

Pin No.	positive voltage	negative voltage
7	COM	-V4
8	+V4	COM

NOTE:


- 1. Only output channel 4(V4) may be configured as negative voltage.
- 2. When V4 is configured as postive output, Pin7 of TB2 is the common ground reference(COM).


 When V4 is configured as negative voltage, Pin8 of TB2 is the common ground rererence(COM).
- 3. TB2 is installed only when multiple output sets are selected.



■ Installation Instruction

For heat dissipation, at least 5cm installation clearance keep-out area around the PSU should be kept and the top side must be face up, shown as below:

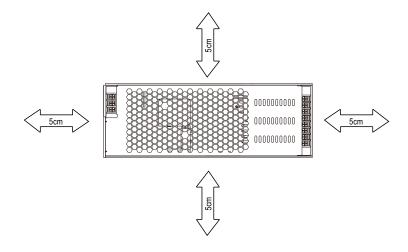



■ Installation Manual

Please refer to: http://www.meanwell.com/manual.html