

## TEY molded case circuit breakers

### Ordering code construction



**Part identifier**

- TEY = 14kA@227V
- TEYF = 18kA@277V
- TEYD = 25kA@277V
- TEYL = 65kA@277V

**Mounting suffix**


- = Bot-on (14-18kA)
- B = Bolt-on (25-65kA)

**Poles**

- 1 = 1 Pole
- 2 = 2 Pole
- 3 = 3 Pole

**Amps**

- 15 = 15 Amps
- 20 = 20 Amps
- 25 = 25 Amps
- 30 = 30 Amps
- 35 = 35 Amps
- 40 = 40 Amps
- 45 = 45 Amps
- 50 = 50 Amps
- 60 = 60 Amps
- 70 = 70 Amps
- 80 = 80 Amps
- 90 = 90 Amps
- 100 = 100 Amps
- 110 = 110 Amps
- 125 = 125 Amps

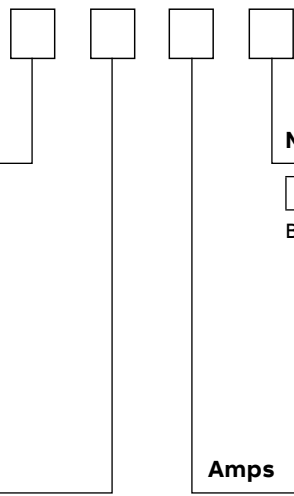

## TEY molded case circuit breakers

Stocked breakers



### TEY/TEYF (UL/cUL File E-11592)

Ampere	Rating Wire Range	Ordering Code	Ordering Code
Single Pole - Includes Integral Cu/Al Load Lugs		Type TEY 14kA @ 277 Vac	Type TEYF 18kA @ 277 Vac
15	#14-#10	TEY115	---
20	#14-#10	TEY120	TEYF120
25	#14-#10	TEY125	---
30	#14-#10	TEY130	---
35	#10-#4	TEY135	---
40	#10-#4	TEY140	---
45	#10-#4	TEY145	---
50	#10-#4	TEY150	---
60	#10-#4	TEY160	---
100	#4-1/0	TEY1100	---

### TEY/TEYF (UL/cUL File E-11592)

Ampere	Rating Wire Range	Ordering Code	Ordering Code
Two-Pole - Includes Integral Cu/Al Load Lugs		Type TEY 14kA @ 480/ 277 Vac	Type TEYF 18kA @ 480/ 277 Vac
15	#14-#10	TEY215	TEYF215
20	#14-#10	TEY220	TEYF220
25	#14-#10	TEY225	TEYF225
30	#14-#10	TEY230	---
35	#10-#4	TEY235	TEYF235
40	#10-#4	TEY240	TEYF240
45	#10-#4	TEY245	TEYF245
50	#10-#4	TEY250	TEYF250
60	#10-#4	TEY260	TEYF260
70	#4-1/0	TEY270	TEYF270
80	#4-1/0	TEY280	TEYF280
90	#4-1/0	TEY290	TEYF290
100	#4-1/0	TEY2100	TEYF2100

### TEY/TEYF (UL/cUL File E-11592)

Ampere	Rating Wire Range	Ordering Code	Ordering Code
Three-Pole - Includes Integral Cu/Al Load Lugs		Type TEY 14kA @ 480/ 277 Vac	Type TEYF 18kA @ 480/ 277 Vac
15	---	TEY315	TEYF315
20	---	TEY320	TEYF320
25	---	TEY325	TEYF325
30	---	TEY330	TEYF330
35	---	TEY335	TEYF335
40	---	TEY340	TEYF340
45	---	TEY345	---
50	---	TEY350	TEYF350
60	---	TEY360	TEYF360
70	---	TEY370	TEYF370
80	---	TEY380	TEYF380

Table continues on next page.