

Product data sheet

Characteristics

QOU360

Mini circuit breaker, QOU, 60A, 3 pole, 240VAC, 10kA

Product availability : Stock - Normally stocked in distribution facility



Price* : 307.80 USD



Main

Product or component type	Miniature circuit-breaker
Range of product	QOU
Circuit breaker type	Standard
Circuit breaker application	HACR and Switching Duty rated

Complementary

Line Rated Current	60 A
Electrical connection	Slotted box lugs, line side Slotted box lugs, load side
[Ue] rated operational voltage	120/240 V AC 240 V AC 120 V AC 48 V DC
Mounting mode	Unit mount
AWG gauge	AWG 14...AWG 2 aluminium/copper
Height	4.05 in (102.87 mm)
Width	2.25 in (57.15 mm)
Depth	2.95 in (74.93 mm)
Tightening torque	45 lbf.in (5.08 N.m) (AWG 14...AWG 2)

Environment

Product certifications	IEC CSA UL Listed
------------------------	-------------------------

* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Jul 30, 2021

Ordering and shipping details

Category	00900 - QOU BREAKERS & SWITCH
Discount Schedule	DE2
GTIN	00785901060291
Nbr. of units in pkg.	1
Package weight(Lbs)	18.40 oz (521.631 g)
Returnability	Yes
Country of origin	MX

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	3.60 in (9.144 cm)
Package 1 width	4.70 in (11.938 cm)
Package 1 Length	2.60 in (6.604 cm)
Unit Type of Package 2	CAR
Number of Units in Package 2	20
Package 2 Weight	23.20 lb(US) (10.523 kg)
Package 2 Height	3.50 in (8.89 cm)
Package 2 width	13.50 in (34.29 cm)
Package 2 Length	20.40 in (51.816 cm)


Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.
Environmental Disclosure	Product Environmental Profile
Halogen content performance	Halogen free product

Contractual warranty

Warranty	18 months
----------	-----------

Dimensions

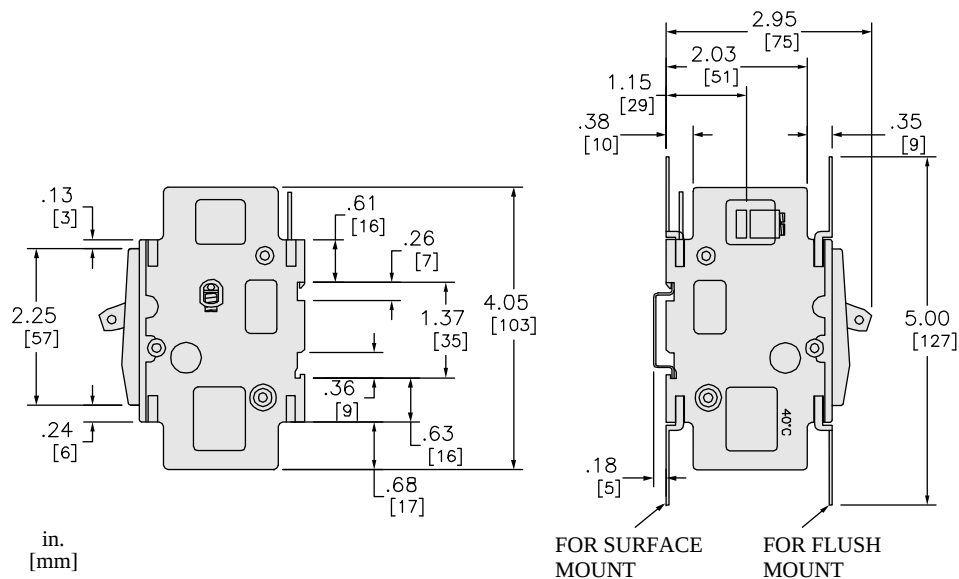

2.50 [64] MIN. WIRE BENDING
SPACE FOR 2 AWG
1.50 [38] MIN. WIRE BENDING
SPACE FOR 14 AWG
TYP. BOTH ENDS FOR ALL CB'S SHOWN
PER ARTICLE 430-1-(B) NEC

[DIMENSIONAL EXAMPLE ONLY BELOW]

