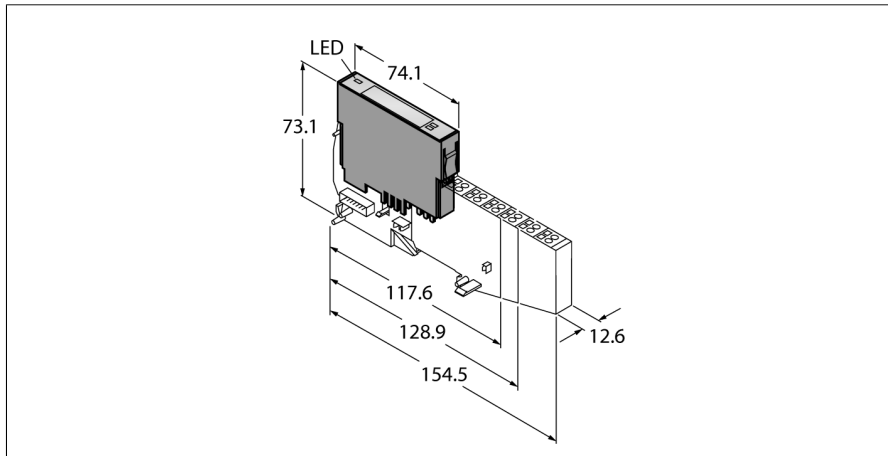


BL20 electronic module

Relay Module, 2 × NO

BL20-2DO-R-NO



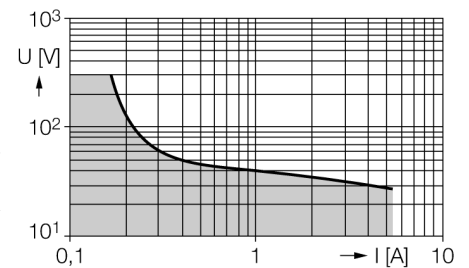
Functional principle

BL20 electronic modules are plugged into the purely passive base modules which are used for connection of field devices. Maintenance is significantly facilitated due to separation of the connection level from the module electronics. Furthermore flexibility is enhanced because the base modules provide a choice of tension spring or screw connection technology.

The electronic modules are completely independent of the type of higher level field bus through the use of gateways.

Load limit curve

Definition: At 1000 switching cycles, a standing electric arc of > 10 ms may not occur.




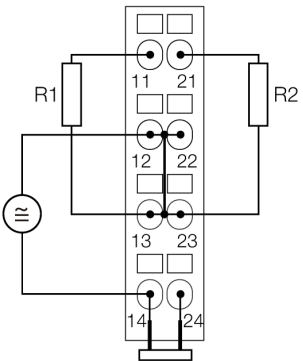
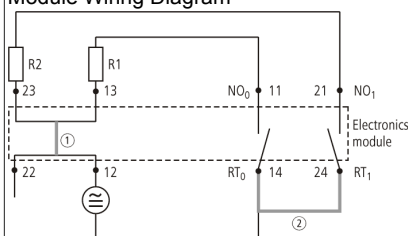
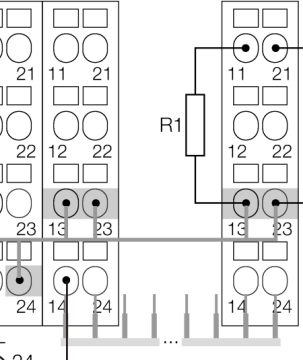
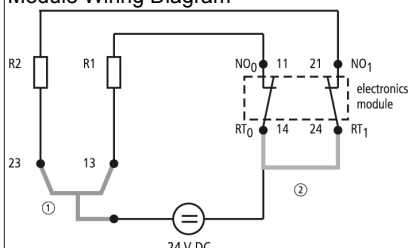

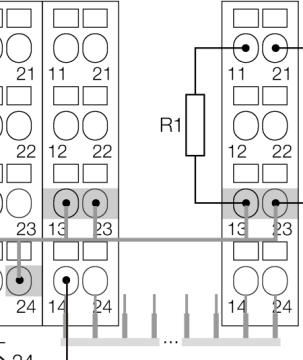
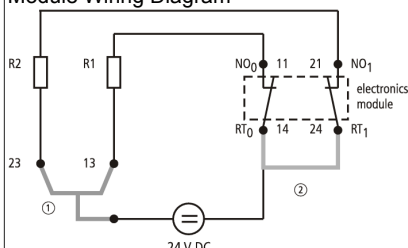
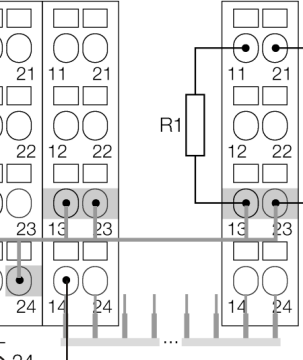
Type designation	BL20-2DO-R-NO
Ident-No.	6827029
Number of channels	2, NO contacts
Rated voltage from the supply terminal	24 VDC
Nominal current from field supply	≤ 20 mA
Nominal current from module bus	≤ 28 mA
Power dissipation, typical	≤ 1 W
Output connectivity	Screw, tension spring
Outputs	
Load type	resistive, inductive, lamp load
Rated load voltage	230/30 VAC/DC
Simultaneity factor	1
Life at 230 VAC, 5A	100000
Life at 230 VAC, 0.5A	1000000
Output current with DC voltage (resistive)	see load limit curve
Electrical isolation	electronics for the field level
Dimensions (W x L x H)	12.6 x 74.1 x 55.4mm
Approvals	CE, cULus, zone 2, Class I, Div. 2
Operating temperature	0 to +55 °C
Storage temperature	-25...+85 °C
Relative humidity	5 to 95% (internal), Level RH-2, no condensation (at 45 °C storage)
Vibration test	acc. to EN 61131
Shock test	acc. to IEC 68-2-27
Drop and topple	acc. to IEC 68-2-31 and free fall to IEC 68-2-32
Electromagnetic compatibility	acc. to EN 50,082-2
Protection class	IP20

BL20 electronic module

Relay Module, 2 × NO

BL20-2DO-R-NO

Compatible base modules

Dimension drawing	Type	Pin configuration
	BL20-S4T-SBBS 6827046 tension spring connection Comments with externally applied supply and cross connected root 1) Jumpered in the electronics 2) cross-connection via QVR in the base	Wiring Diagram  Module Wiring Diagram 
	BL20-S4S-SBBS 6827047 screw connection Comments with externally applied supply and cross connected root 1) Jumpered in the electronics 2) cross-connection via QVR in the base	Wiring Diagram  Module Wiring Diagram 
	BL20-S4T-SBCS 6827063 tension spring connection Comments with supply via C rail and cross connected root 1) C rail 2) cross-connection via QVR in the base; max. 8 relay modules	Wiring Diagram  Module Wiring Diagram 
	BL20-S4S-SBCS 6827060 screw connection Comments with supply via C rail and cross connected root 1) C rail 2) cross-connection via QVR in the base; max. 8 relay modules	Wiring Diagram  Module Wiring Diagram 