


JBBS-57-E411 passive junction – CANopen/DeviceNet Junction Box

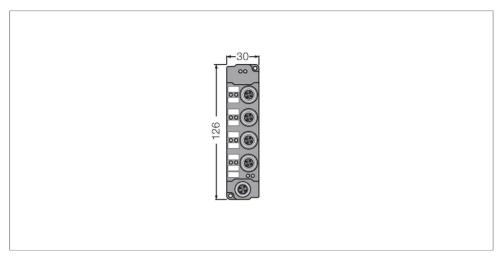

Technical data

| Туре | JBBS-57-E411 |
|--|--|
| Ident. no. | 6603378 |
| Distributed I/O | 4-port, with connector |
| Housing | Plastic, PA, Black |
| I/O Port | M12 x 1, Female |
| Number of contacts | 5 |
| Contacts | Brass, CuZn, Gold-plated |
| Contact carriers | Plastic, PA, Black |
| Homerun connector | M12 × 1, Male |
| | |
| Number of contacts | 5 |
| Number of contacts Contacts | 5 Metal, CuZn, Gold-plated |
| | |
| Contacts | Metal, CuZn, Gold-plated |
| Contacts Contact carriers | Metal, CuZn, Gold-plated Black DeviceNet |
| Contacts Contact carriers Fieldbus | Metal, CuZn, Gold-plated Black DeviceNet CANopen |
| Contacts Contact carriers Fieldbus Rated voltage | Metal, CuZn, Gold-plated Black DeviceNet CANopen 30 V |

Features

- Housing material: Nylon
- Housing color: black
- Protection class IP67
- RoHS-compliant
- CE compliant
- All pins are connected through (1:1)
- The DeviceNet™ supply voltage between pin 2 and 3 (11 ... 30VDC) is displayed via an LED In CANopen this supply voltage is optional.
- Passive junction, 4-port
- Protection class IP67
- 1 × M12 male connector
- 4 × M12 female connector

Contact assignment



