
REVISIONS APPROVED REV. DESCRIPTION DATE REDRAWN IN SW 11/13/2006 Α

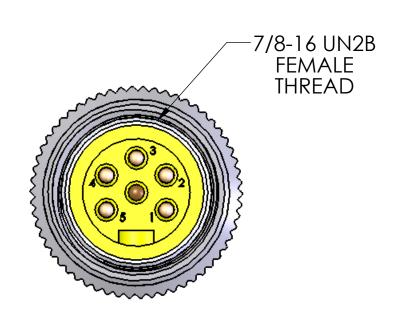

[93] 3.7 nom. [28] ່1.1

| MATERIALS | | | | |
|--------------|-------------------------------|--|--|--|
| BODY: | BLACK POLYAMIDE | | | |
| CONTACTS: | GOLD PLATED COPPER ALLOY | | | |
| CABLE SEAL: | NBR | | | |
| INSERT: | YELLOW PVC | | | |
| COUPLING: | NICKEL PLATED BRASS | | | |
| | | | | |
| RATINGS | | | | |
| AMPS: | 16AWG - 8A max | | | |
| | 18AWG - 5.5A max | | | |
| | 20-22AWG - 4A max | | | |
| VOLTS: | 600V MAX | | | |
| SEAL: | IP67 | | | |
| CABLE RANGE: | 16AWG - 22AWG | | | |
| | 0.20" - 0.51" (5mm - 13mm) OD | | | |
| APPROVALS | | | | |
| | | | | |
| US: | UL LISTED | | | |
| CANADA: | C-UL LISTED | | | |

Voltage rating is 600V or the rating of the cable, whichever is less.

Connections made via screw terminal

| | DIMENSIONS ARE IN INCHES | DRAWN | BEM | I |
|--|--------------------------|-----------|-----|------------------|
| | AND [MM] | CHECKED | | TIT |
| | | ENG APPR. | | |
| | | MFG APPR. | | |
| | | Q.A. | | |
| PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY | MATERIAL | COMMENTS: | | SI |
| REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF | FINISH | | | l |
| MENCOM CORPORATION IS | | | | |
| PROHIBITED | DO NOT SCALE DRAWING | | | \mathbb{R}^{C} |

| UNLESS OTHERWISE SPECIFIED: | | NAME | | | 4 TI O \ I |
|-----------------------------|-----------|------|------------|-------------|--------------|
| DIMENSIONS ARE IN INCHES | DRAWN | BEM | WFN(| COM CORPORA | AIION |
| MND [MM] | CHECKED | | TITLE: | | |
| | ENG APPR. | | | | |
| | MFG APPR. | | | | |
| | Q.A. | | | | |
| MATERIAL | COMMENTS: | | | G. NO. | REV |
| INISH | | | В | MIN-6MP-FW | A |
| DO NOT SCALE DRAWING | | | SCALE: 2:1 | WEIGHT: | SHEET 1 OF 1 |