


PIN #	COLOR
1	BLACK
2	GREEN / YELLOW
3	RED
4	WHITE

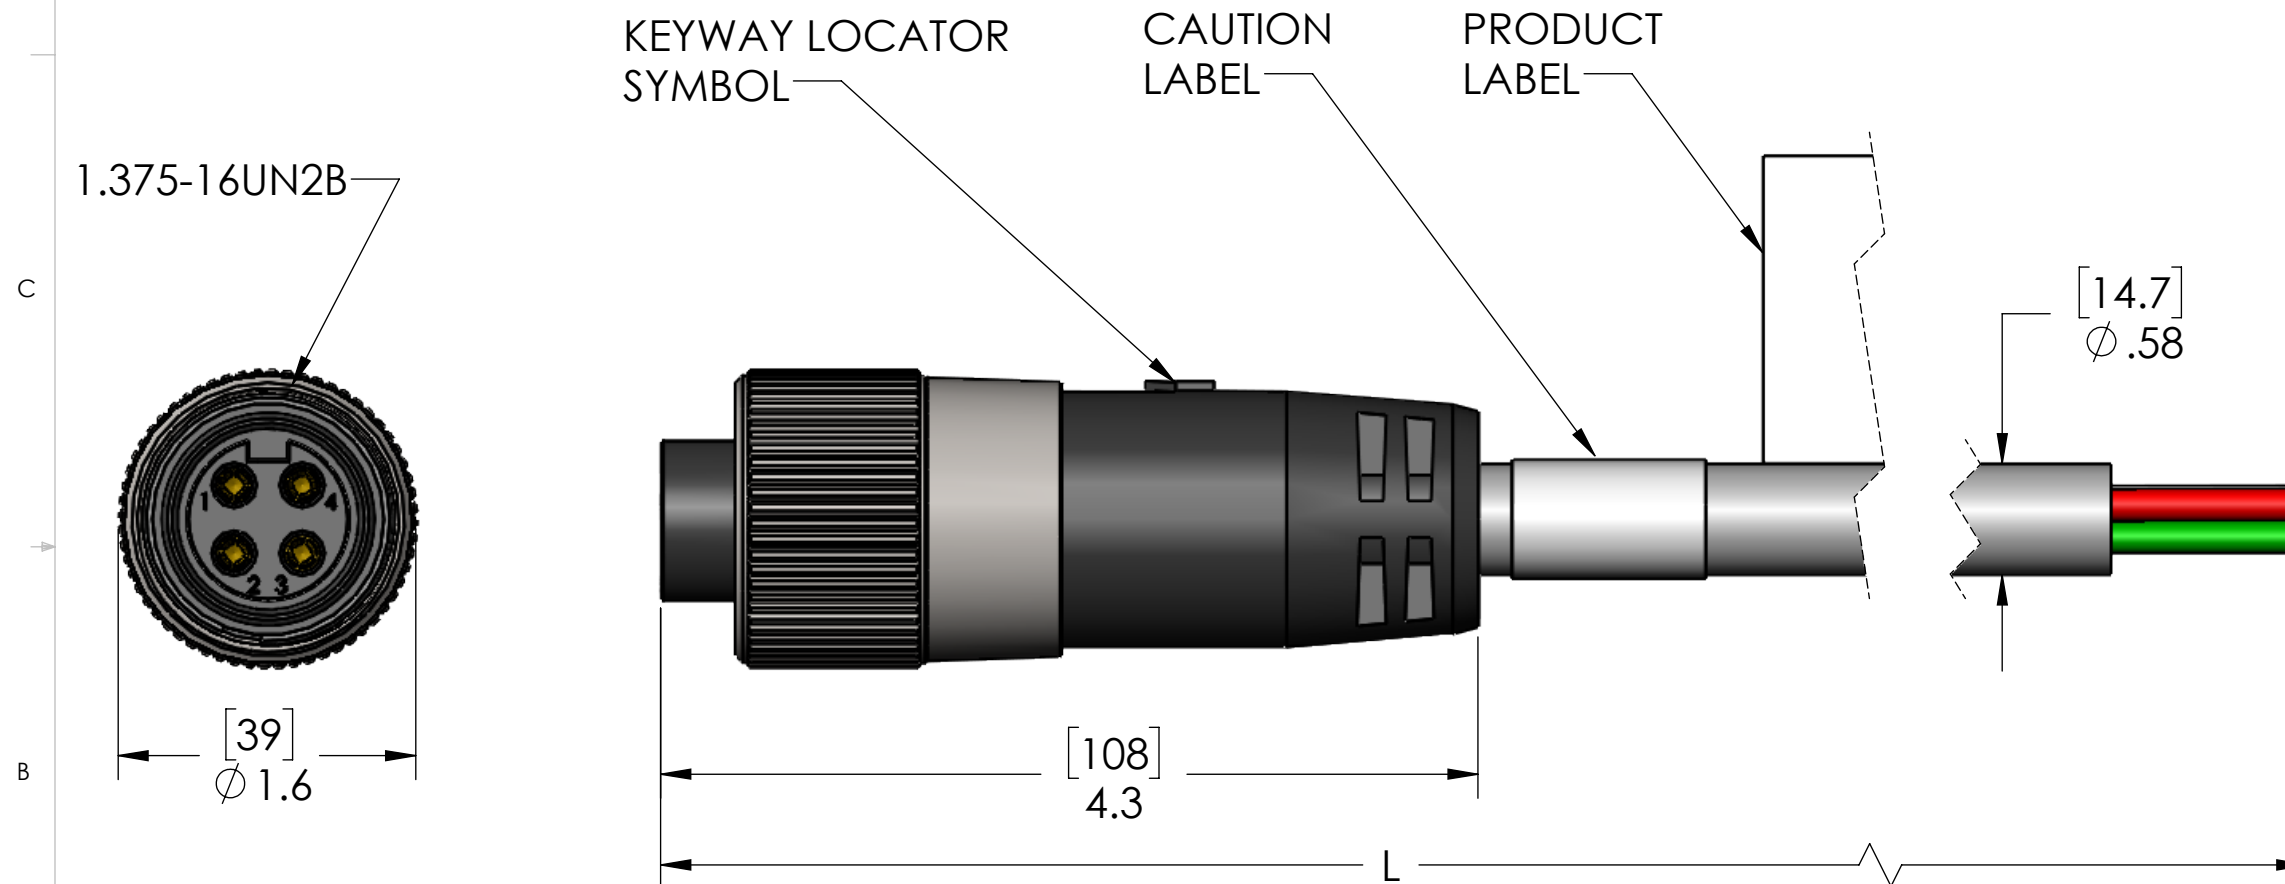

P/N	L	STD?
PMIN-44FP-1M	40" [1m]	YES
PMIN-44FP-2M	79" [2m]	YES
PMIN-44FP-3M	117" [3m]	NO
PMIN-44FP-4M	157" [4m]	YES
PMIN-44FP-5M	197" [5m]	YES
PMIN-44FP-6M	236" [6m]	NO
PMIN-44FP-8M	315" [8m]	NO
PMIN-44FP-10M	393" [10m]	YES
PMIN-44FP-15M	590" [15M]	YES

PARTS LISTED AS NOT BEING STANDARD
MAY REQUIRE MINIMUM ORDERS

MATERIALS	
BODY:	BLACK PVC
INSERT:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	14/4 STOOW GRAY
COUPLING:	NICKEL PLATED BRASS
RATINGS:	
SCCR RATING:	65kA Breakers and Fuses
RoHS COMPLIANT:	Yes
PROTECTION:	IP67
UL CATEGORY:	PVVA (US), PVVA7 (Canada)
U.S.	UL 2237 LISTED, File E469485
CANADA	C-UL 2237 LISTED, File E469485

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	600V
AMPS	20A
TEMP:	-40° to 90°C

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	ADM
	DRAWN DATE	06/23/2020
	CHECKED BY	GO
	CHECK DATE	06/23/2020
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION			
TITLE: 4 PL FEM PLG PMIN 14AWG			
SIZE B	DWG. NO. PMIN-44FP-ZZ		REV B
SCALE: 1:1	WEIGHT:		SHEET 1 OF 1