
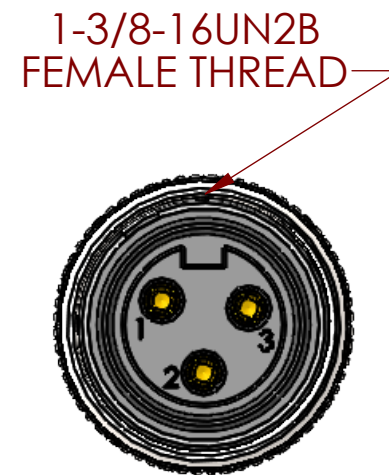
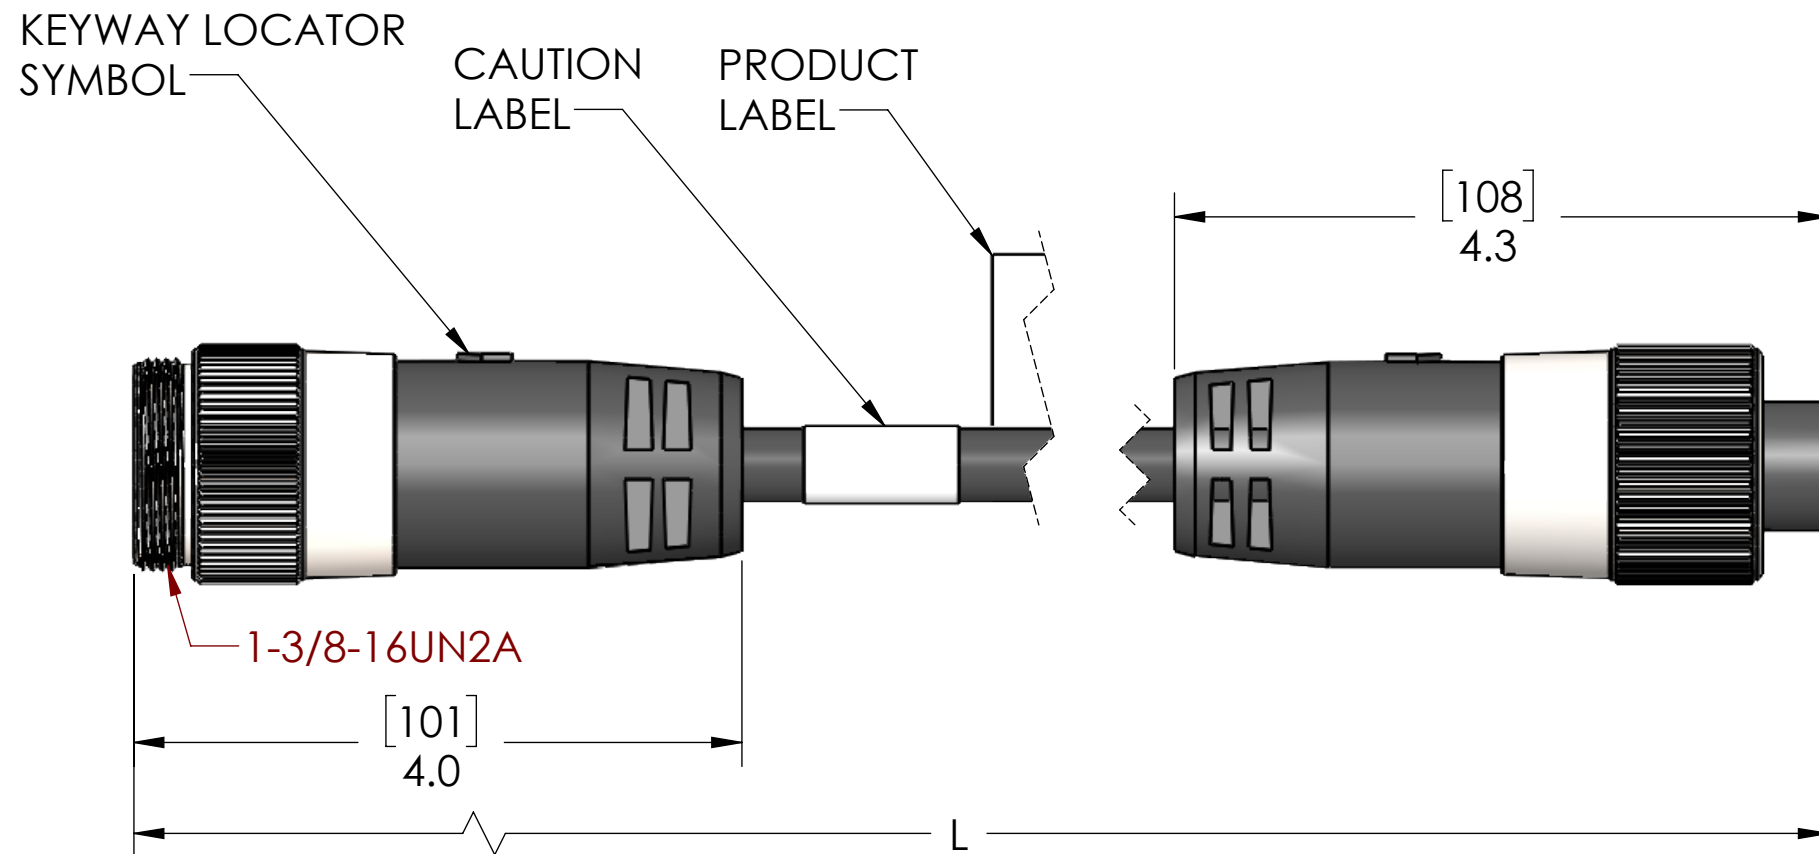


WIRING
1 --- 1
2 --- 2
3 --- 3

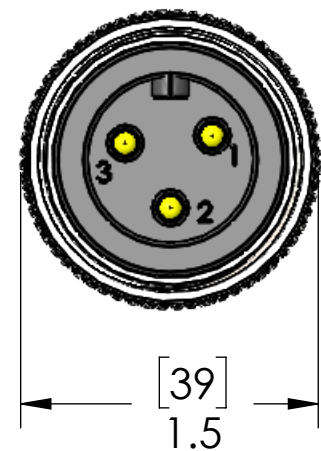

MATERIALS	
BODY:	BLACK PVC
INSERT:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	10/3 TC-ER FT4 BLK TPE JKT
COUPLING:	NICKEL PLATED BRASS

RATINGS:	
SCCR RATING:	65kA Breakers and Fuses
RoHS COMPLIANT:	Yes
PROTECTION:	IP67
UL CATEGORY:	PVVA (US), PVVA7 (Canada)
U.S.	UL 2237 LISTED, File E469485
CANADA	C-UL 2237 LISTED, File E469485

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	600V
AMPS	35A
TEMP:	-40°C - 90°C

UNLESS OTHERWISE SPECIFIED:		DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE	06/22/2020
		CHECKED BY	GO
		CHECK DATE	06/23/2020
		COMMENTS:	
MATERIAL			
FINISH			
DO NOT SCALE DRAWING			

P/N	L
PMINW-30MFP-1M-C011	40" [1m]
PMINW-30MFP-2M-C011	79" [2m]
PMINW-30MFP-3M-C011	118" [3m]
PMINW-30MFP-4M-C011	157" [4m]
PMINW-30MFP-5M-C011	197" [5m]
PMINW-30MFP-10M-C011	393" [10m]
PMINW-30MFP-15M-C011	590" [15M]
PMINW-30MFP-20M-C011	787" [20M]

PARTS LISTED AS NOT BEING STANDARD
MAY REQUIRE MINIMUM ORDERS
OTHER LENGTHS AVAILABLE,
PLEASE CONSULT FACTORY

MENCOM CORPORATION			
TITLE:			
3 PL M-F EXT PLG PMIN 10AWG TPE			
SIZE	DWG. NO.		REV
B	PMINW-30MFP-ZZ-C011		B
SCALE: 1:1.25		WEIGHT:	SHEET 1 OF 1