


PIN #	COLOR
1	BLACK
2	GREEN / YELLOW
3	WHITE

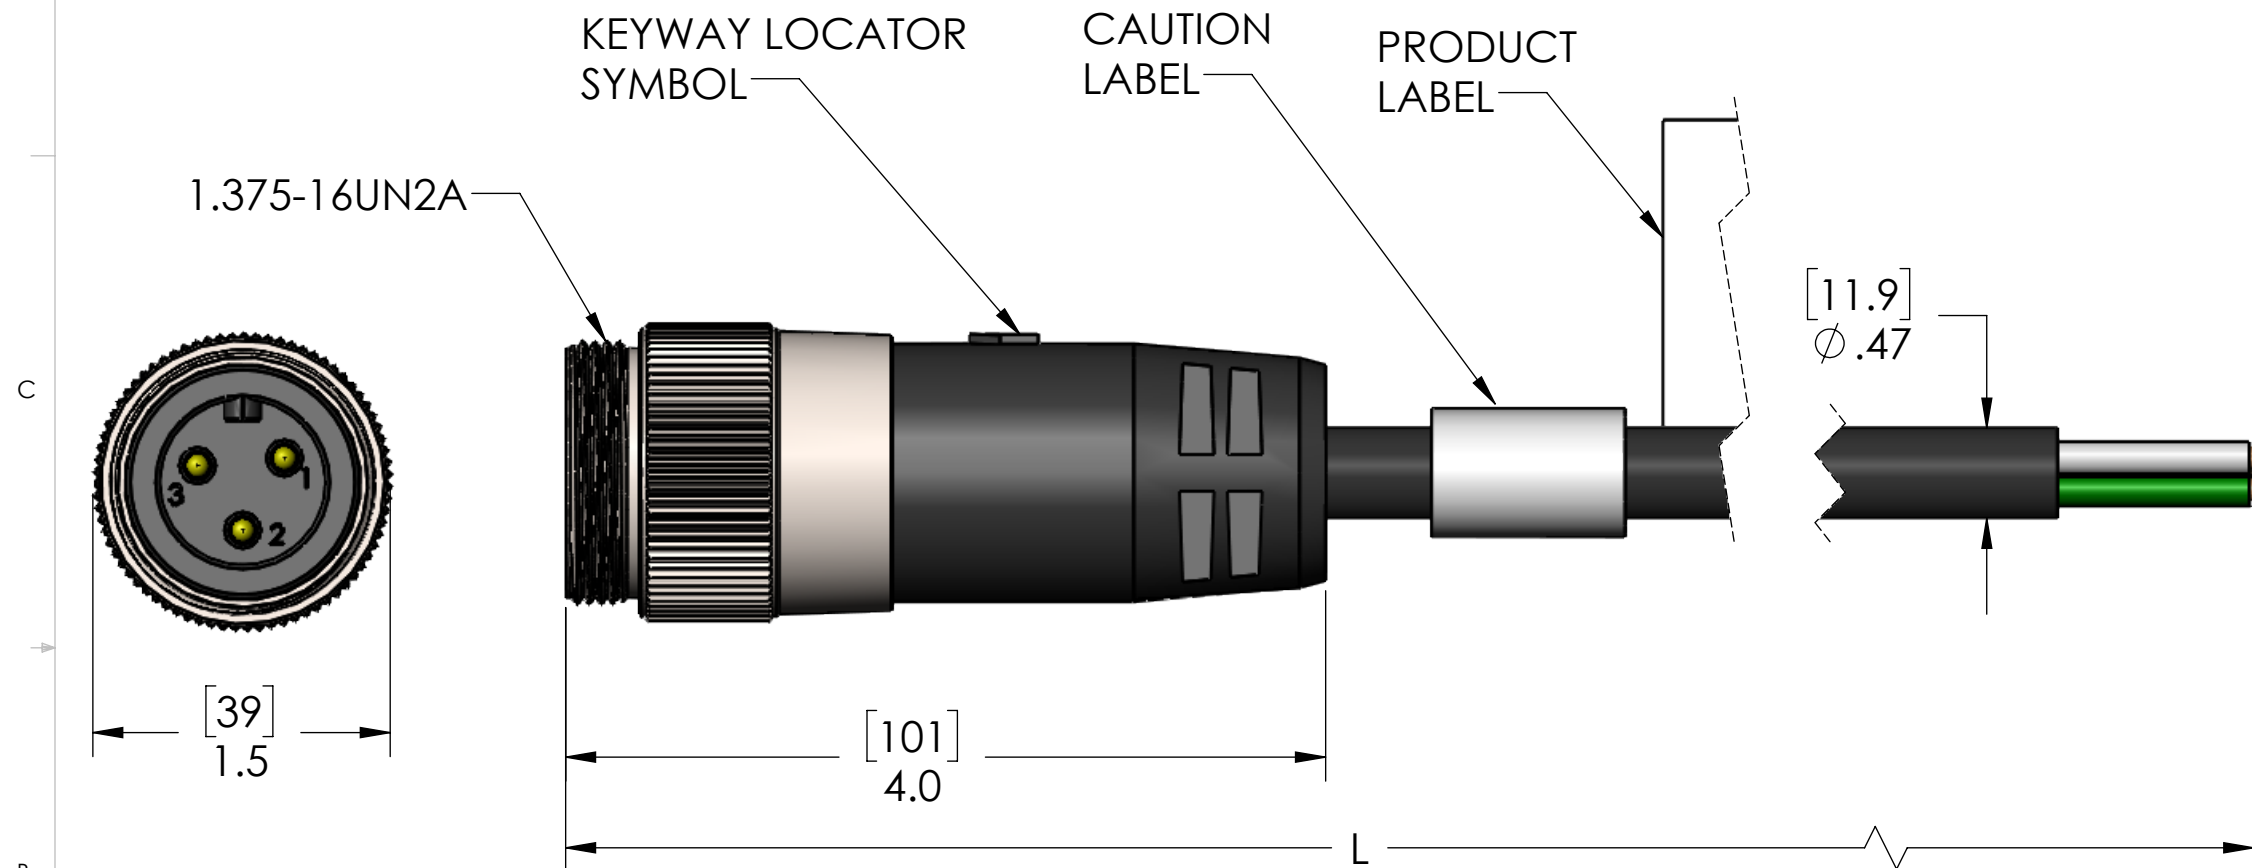

P/N	L	STD?
PMINW-30MP-1M-C011	40" [1m]	YES
PMINW-30MP-2M-C011	79" [2m]	YES
PMINW-30MP-3M-C011	117" [3m]	NO
PMINW-30MP-4M-C011	157" [4m]	YES
PMINW-30MP-5M-C011	197" [5m]	YES
PMINW-30MP-6M-C011	236" [6m]	NO
PMINW-30MP-8M-C011	315" [8m]	NO
PMINW-30MP-10M-C011	393" [10m]	YES
PMINW-30MP-15M-C011	590" [15M]	YES
PMINW-30MP-20M-C011	787" [20M]	YES

PARTS LISTED AS NOT BEING STANDARD
MAY REQUIRE MINIMUM ORDERS
OTHER LENGTHS AVAILABLE,
PLEASE CONSULT FACTORY

MATERIALS	
BODY:	BLACK PVC
INSERT:	BLACK PVC
CONTACTS:	GOLD PLATED COPPER ALLOY
CABLE:	10/3 TC-ER FT4 BLK TPE JKT
COUPLING:	NICKEL PLATED BRASS
RATINGS:	
SCCR RATING:	65kA Breakers and Fuses
RoHS COMPLIANT:	Yes
PROTECTION:	IP67
UL CATEGORY:	PVVA (US), PVVA7 (Canada)
U.S.	UL 2237 LISTED, File E469485
CANADA	C-UL 2237 LISTED, File E469485

CAUTION:
RISK OF ELECTRICAL SHOCK
DO NOT DISCONNECT UNDER LOAD

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

VOLTS	600V
AMPS	35A
TEMP:	-40° to 90°C

UNLESS OTHERWISE SPECIFIED:		DRAWN BY	ADM
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN DATE	06/22/2020
		CHECKED BY	GO
		CHECK DATE	06/23/2020
MATERIAL		COMMENTS:	
FINISH			
DO NOT SCALE DRAWING			

MENCOM CORPORATION			
TITLE:			
3 PL MAL PLG PMIN 10AWG			
SIZE	DWG. NO.		REV
B	PMINW-30MP-ZZ-C011		B
SCALE: 1:1		WEIGHT:	SHEET 1 OF 1