




Tee, Aluminum Compression

by FARGO
Catalog ID: ORT2116

Tee, Aluminum Compression, Open Run Cable-to-Pad, 1426-1520 Cable, 2-Hole Pad. TEE, AL COMP 1.426-1.520 IN - C PAD

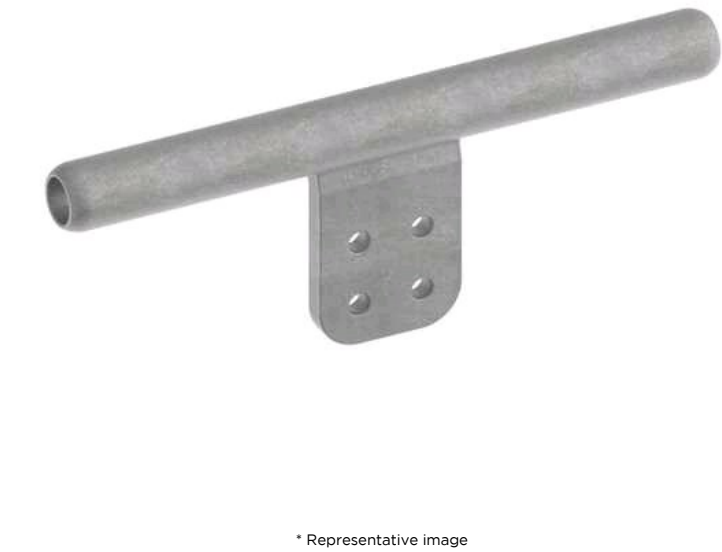

* Representative image

Product Details

General

Material	Aluminum
Number of Ground Braid Lug Holes	0
Number of Pad Holes	4
Type	Tee, Aluminum Compression
UPC	096359364542

Dimensions

Base Hole Spacing	0 in
Diameter - Base Holes	0 in
Diameter - Bolt	0 in
Diameter - Inside	0 in
Length - Coupling	0 in
Length Before Compression	0 in
Run Length before Compression	21.6 in
Weight	6.860 lb
Width - Flat Bar Tap	3 in

Electrical Ratings

Maximum Current Rating Amps Continuous	0
--	---

Conductor Related

Conductor Compatibility	ACSR-Bobolink-1431-45/7;ACSR-Plover-1431-54/19;ACSR-Nuthatch-1510.5-45/7;ACSR-Parrot-1510.5-54/19;ACSR-Lapwing-1590-45/7;AAC-Coreopsis-1590-61
Conductor Diameter (Main) - Maximum	1.52 in
Conductor Diameter (Main) - Minimum	1.426 in

Conductor Diameter (Main) Range	1.426 - 1.52
Conductor Type	• AAC • ACSR

Logistics

Pallet Quantity	120 EA
-----------------	--------

For further technical assistance, please contact us

Domestic Customer Service

Hubbell Power Systems
210 N. Allen Centralia, MO 65240 USA
Phone: (573) 682-5521
Fax: (573) 682-8475
Email: hpscscs@hubbell.com

International Customer Service

Phone: +1-573-682-5521
Fax: +1-573-682-8516
Email: hpsintlcs@hubbell.com