


FLOOD WASHABLE
SILICONE RUBBER HOUSING

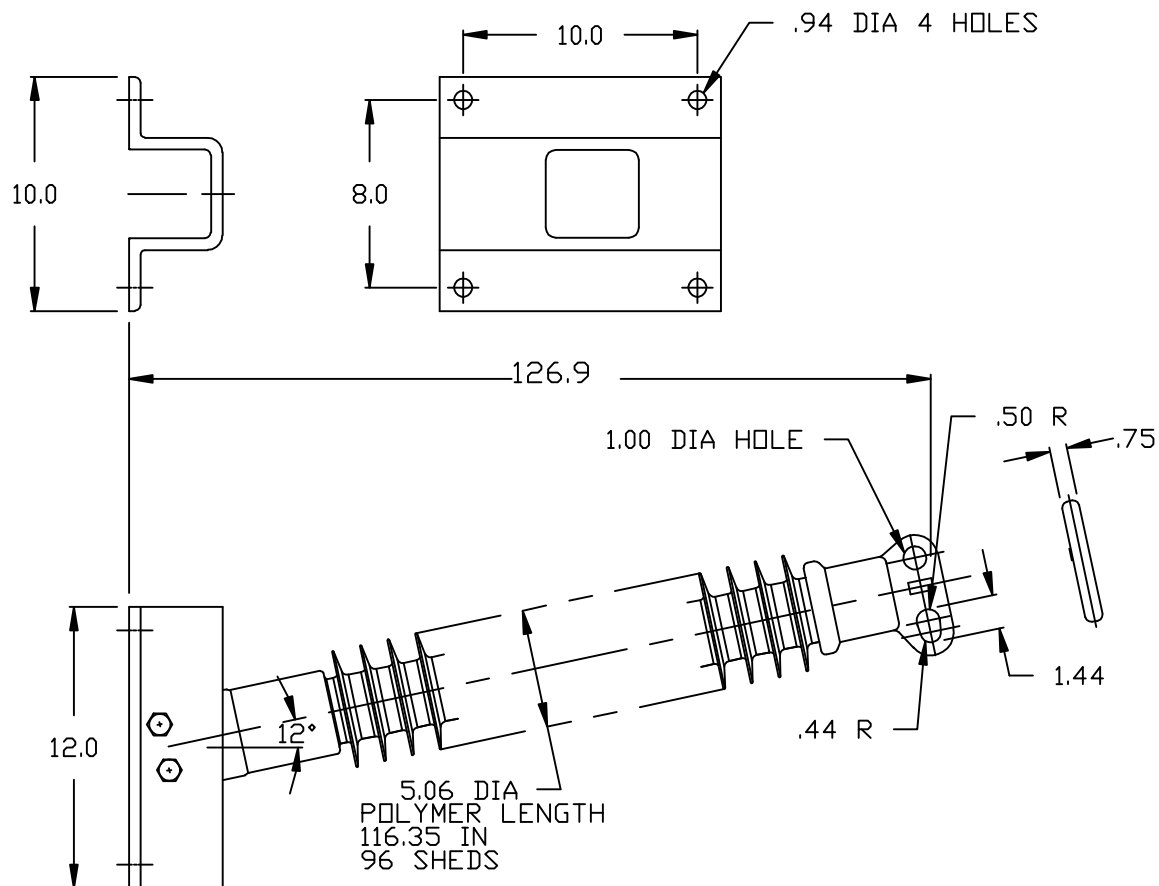

STRIKE DISTANCE_____116 IN
LEAKAGE DISTANCE_____303 IN
SCL_____1300 LB (5.8 kN)
RCL_____650 LB (2.9 kN)
DRY 60 HZ FLASHOVER_____1145 kV
WET 60 HZ FLASHOVER_____920 kV
WET 60 HZ WITHSTAND_____780 kV
IMPULSE CRITICAL POSITIVE_____1840 kV
IMPULSE WITHSTAND POSITIVE_____1745 kV
IMPULSE CRITICAL NEGATIVE_____1920 kV
IMPULSE WITHSTAND NEGATIVE_____1820 kV
WEIGHT_____71 LB

ELECTRICAL CHARACTERISTICS IN
ACCORDANCE WITH ANSI C29.1-1988

Program Revision

REV DATE 04/02/18

CONFIDENTIAL: THIS DRAWING AND ITS
CONTENTS ARE CONFIDENTIAL AND THE
EXCLUSIVE PROPERTY OF HUBBELL
POWER SYSTEMS. NO PUBLICATION,
DISTRIBUTION OR COPIES MAY BE MADE
WITHOUT THE WRITTEN CONSENT OF
HUBBELL POWER SYSTEMS.
HUBBELL POWER SYSTEMS UNPUBLISHED
ALL RIGHTS RESERVED UNDER THE
COPYRIGHT LAWS.



HUBBELL® POWER SYSTEMS

TITLE

QUADRI*SIL LINE
POST SERIES 250

SIZE

S

DWG NO.

ER_250-QP

CAT / PART / ASSY NO.

P250116S0030

REV

11

DO NOT SCALE
THIS DRAWING

DRN BY NON

DATE 08/27/07

SHEET 1 OF 1