


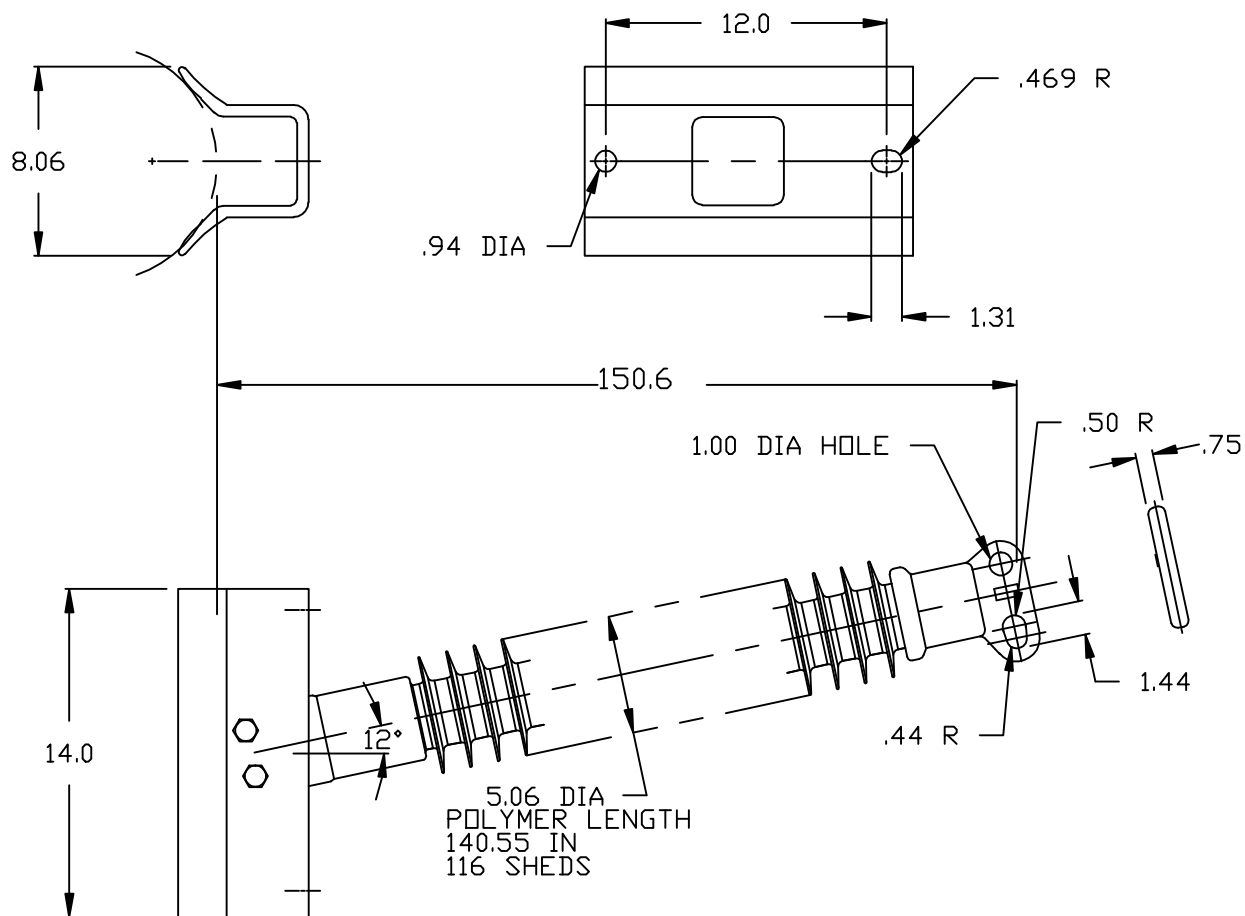

STRIKE DISTANCE _____ 141 IN
 LEAKAGE DISTANCE _____ 366 IN
 SCL _____ 1080 LB (4.8 kN)
 RCL _____ 540 LB (2.4 kN)
 DRY 60 HZ FLASHOVER _____ 1335 kV
 WET 60 HZ FLASHOVER _____ 1035 kV
 WET 60 HZ WITHSTAND _____ 875 kV
 IMPULSE CRITICAL POSITIVE _____ 2200 kV
 IMPULSE WITHSTAND POSITIVE _____ 2090 kV
 IMPULSE CRITICAL NEGATIVE _____ 2275 kV
 IMPULSE WITHSTAND NEGATIVE _____ 2160 kV
 WEIGHT _____ 84 LB

ELECTRICAL CHARACTERISTICS IN
ACCORDANCE WITH ANSI C29.1-1988

FLOOD WASHABLE
SILICONE RUBBER HOUSING

Program Revision

REV DATE 03/23/18

CONFIDENTIAL: THIS DRAWING AND ITS
 CONTENTS ARE CONFIDENTIAL AND THE
 EXCLUSIVE PROPERTY OF HUBBELL
 POWER SYSTEMS. NO PUBLICATION,
 DISTRIBUTION OR COPIES MAY BE MADE
 WITHOUT THE WRITTEN CONSENT OF
 HUBBELL POWER SYSTEMS.
 HUBBELL POWER SYSTEMS UNPUBLISHED
 ALL RIGHTS RESERVED UNDER THE
 COPYRIGHT LAWS.



HUBBELL® POWER SYSTEMS

TITLE

QUADRI*SIL LINE
POST SERIES 250

SIZE

S

DWG NO.

ER_250-QP

CAT / PART / ASSY NO.

P250140S0020

REV

11

DO NOT SCALE
THIS DRAWING

DRN BY NON

DATE 08/27/07

SHEET 1 OF 1