

# Product data sheet


## Characteristics

# LC7K0910M7

TeSys K contactor - 3P - AC-3  $\leq$  440 V 9 A - 1  
NO aux. - 220...230 V AC coil

Product availability : Non-Stock - Not normally stocked in distribution facility

Price\* : 132.00 USD

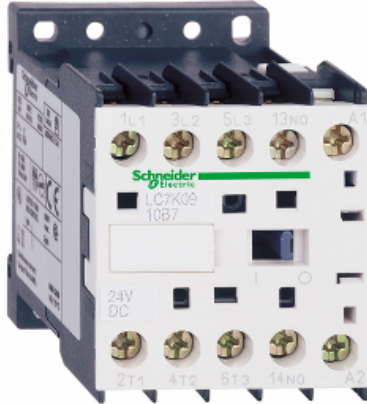

### Main

Range	TeSys
Product or component type	Contacteur
Product name	TeSys K
Device short name	LC7K
Device application	Control
Contacteur application	Resistive load Motor control

### Complementary

Utilisation category	AC-1 AC-4 AC-3
Poles description	3P
Power pole contact composition	3 NO
[Ue] rated operational voltage	Power circuit 690 V AC 50/60 Hz Signalling circuit $\leq$ 690 V AC 50/60 Hz
[Ie] rated operational current	20 A 122 °F (50 °C)) $\leq$ 440 V AC AC-1 power circuit 9 A $\leq$ 440 V AC AC-3 power circuit 16 A 158 °F (70 °C)) 690 V AC AC-1 power circuit
Control circuit type	AC 50/60 Hz silent
[Uc] control circuit voltage	220...230 V AC 50/60 Hz
Motor power kW	2.2 kW 220...230 V AC 50/60 Hz AC-3 4 kW 380...415 V AC 50/60 Hz AC-3 4 kW 440 V AC 50/60 Hz AC-3 4 kW 480 V AC 50/60 Hz AC-3 4 kW 500...600 V AC 50/60 Hz AC-3 4 kW 660...690 V AC 50/60 Hz AC-3 2.2 kW 400 V AC 50/60 Hz AC-4
Auxiliary contact composition	1 NO
[Uimp] rated impulse withstand voltage	8 kV
Overtoltage category	III
[Ith] conventional free air thermal current	20 A 122 °F (50 °C) power circuit 10 A 122 °F (50 °C) signalling circuit

\* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Irms rated making capacity	110 A AC power circuit NF C 63-110 110 A AC power circuit IEC 60947 110 A AC signalling circuit IEC 60947
Rated breaking capacity	110 A 415 V IEC 60947 110 A 440 V IEC 60947 80 A 500 V IEC 60947 110 A 220...230 V IEC 60947 110 A 380...400 V IEC 60947 70 A 660...690 V IEC 60947
[Icw] rated short-time withstand current	90 A 122 °F (50 °C) - 1 s power circuit 85 A 122 °F (50 °C) - 5 s power circuit 80 A 122 °F (50 °C) - 10 s power circuit 60 A 122 °F (50 °C) - 30 s power circuit 45 A 122 °F (50 °C) - 1 min power circuit 40 A 122 °F (50 °C) - 3 min power circuit 20 A 122 °F (50 °C) - >= 15 min power circuit 80 A - 1 s signalling circuit 90 A - 500 ms signalling circuit 110 A - 100 ms signalling circuit
Associated fuse rating	25 A gG <= 440 V power circuit 25 A aM power circuit 10 A gG signalling circuit IEC 60947 10 A gG signalling circuit VDE 0660
Average impedance	3 mOhm - lth 20 A 50 Hz power circuit
[Ui] rated insulation voltage	Power circuit 600 V UL 508 Power circuit 690 V IEC 60947-4-1 Signalling circuit 690 V IEC 60947-4-1 Signalling circuit 690 V IEC 60947-5-1 Signalling circuit 600 V UL 508 Power circuit 600 V CSA C22.2 No 14 Signalling circuit 600 V CSA C22.2 No 14
Insulation resistance	> 10 MOhm signalling circuit
Inrush power in VA	3 VA 68 °F (20 °C))
Hold-in power consumption in VA	3 VA 68 °F (20 °C))
Heat dissipation	3 W
Control circuit voltage limits	Operational 0.85...1.1 U <sub>c</sub> 122 °F (50 °C)) Drop-out 0.1...0.75 U <sub>c</sub> 122 °F (50 °C))
Connections - terminals	screw clamp terminals 1 0.00...0.01 in <sup>2</sup> (1.5...4 mm <sup>2</sup> )solid screw clamp terminals 1 0.00...0.01 in <sup>2</sup> (0.75...4 mm <sup>2</sup> )flexible without cable end screw clamp terminals 1 0.00...0.00 in <sup>2</sup> (0.34...2.5 mm <sup>2</sup> )flexible with cable end screw clamp terminals 2 0.00...0.01 in <sup>2</sup> (1.5...4 mm <sup>2</sup> )solid screw clamp terminals 2 0.00...0.01 in <sup>2</sup> (0.75...4 mm <sup>2</sup> )flexible without cable end screw clamp terminals 2 0.00...0.00 in <sup>2</sup> (0.34...1.5 mm <sup>2</sup> )flexible with cable end
Maximum operating rate	3600 cyc/h
Auxiliary contacts type	Instantaneous 1 NO
Signalling circuit frequency	<= 400 Hz
Minimum switching current	5 mA signalling circuit
Minimum switching voltage	17 V signalling circuit
Mounting support	Rail Plate
Tightening torque	11.51 lbf.in (1.3 N.m) screw clamp terminals Philips No 2 11.51 lbf.in (1.3 N.m) screw clamp terminals flat Ø 6 mm
Operating time	30...40 ms coil energisation and NO closing 30 ms coil de-energisation and NO opening
Safety reliability level	B10d = 1369863 cycles contactor with nominal load EN/ISO 13849-1 B10d = 20000000 cycles contactor with mechanical load EN/ISO 13849-1
Non overlap distance	0.02 in (0.5 mm)
Mechanical durability	10 Mcycles
Electrical durability	0.18 Mcycles 20 A AC-1 <= 440 V 1.3 Mcycles 9 A AC-3 <= 440 V
Mechanical robustness	Shocks contactor closed, on X axis10 Gn for 11 ms IEC 60068-2-27 Shocks contactor closed, on Y axis15 Gn for 11 ms IEC 60068-2-27 Shocks contactor closed, on Z axis15 Gn for 11 ms IEC 60068-2-27 Shocks contactor opened, on X axis6 Gn for 11 ms IEC 60068-2-27 Shocks contactor opened, on Y axis10 Gn for 11 ms IEC 60068-2-27

Shocks contactor opened, on Z axis 10 Gn for 11 ms IEC 60068-2-27  
 Vibrations contactor closed 4 Gn, 5...300 Hz IEC 60068-2-6  
 Vibrations contactor opened 2 Gn, 5...300 Hz IEC 60068-2-6

Depth	2.24 in (57 mm)
Net Weight	0.50 lb(US) (0.225 kg)

## Environment

Standards	BS 5424 IEC 60947 NF C 63-110 VDE 0660
Product certifications	CSA UL
IP degree of protection	IP2x VDE 0106
Protective treatment	TC IEC 60068 TC DIN 50016
Ambient air temperature for storage	-58...176 °F (-50...80 °C)
Operating altitude	6561.68 ft (2000 m) without derating
Flame retardance	V1 conforming to UL 94 Requirement 2 conforming to NF F 16-101 Requirement 2 conforming to NF F 16-102

## Ordering and shipping details

Category	22326 - CTR,K-LINE,AC,OPEN,NONREV
Discount Schedule	I12
GTIN	03389110493252
Nbr. of units in pkg.	1
Package weight(Lbs)	7.65 oz (217 g)
Returnability	No
Country of origin	FR

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	1.89 in (4.8 cm)
Package 1 width	2.44 in (6.2 cm)
Package 1 Length	2.60 in (6.6 cm)
Unit Type of Package 2	S02
Number of Units in Package 2	40
Package 2 Weight	20.16 lb(US) (9.143 kg)
Package 2 Height	5.91 in (15 cm)
Package 2 width	11.81 in (30 cm)
Package 2 Length	15.75 in (40 cm)

## Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Antimony oxide & Antimony trioxide, which is known to the State of California to cause cancer. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information.
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Contractual warranty

---

Warranty	18 months
----------	-----------

---