

Product data sheet

Characteristics

XVC4B1

Harmony XVC, Monolithic precabled tower light, plastic, red, Ø40, tube mounting, steady, IP23, 24 V AC/DC

Product availability : Non-Stock - Not normally stocked in distribution facility

Price* : 158.00 USD



Main

| | |
|------------------------------------|---|
| Range of product | Harmony XVC4 |
| Product or component type | Complete pre-wired monolithic tower light |
| Beacon or indicator bank unit type | 1 illuminated unit |
| Sound signalling | Without |
| Mounting diameter | 1.57 in (40 mm) |
| Component name | XVC |
| Device short name | XVC |
| Light source | LED steady red |
| Supply circuit type | AC/DC |

Complementary

| | |
|--|---|
| Material | Polycarbonate illuminated unit ABS (acrylonitrile butadiene-styrene) base unit PBT + ABS (UL94HB) top cover SGP (chromium-plated) support tube |
| Mounting location | On support tube, 17 mm |
| Product mounting | On support tube, 17 mm |
| [Us] rated supply voltage | 24 V |
| [Us] rated supply voltage | 24 V |
| Cable cross section | 0.00 in ² (0.33 mm ²) |
| AWG gauge | AWG 22 |
| Cable length | 23.62 in (600 mm) |
| Marking | CE |
| [Uimp] rated impulse withstand voltage | 0.8 kV |
| Current consumption | 25 mA |
| Flashing frequency | 1 Hz |
| Net Weight | 1.10 lb(US) (0.5 kg) |
| Height | 15.89 in (403.5 mm) |

* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Jul 30, 2021

Environment

| | |
|---------------------------------------|---|
| Standards | EN/IEC 61000-6-2 EN/IEC 61000-6-3 |
| Product certifications | UL |
| Protective treatment | TC |
| Ambient air temperature for storage | -31...158 °F (-35...70 °C) |
| Ambient air temperature for operation | 14...122 °F (-10...50 °C) |
| Electrical shock protection class | Class I EN/IEC 61140 |
| Overvoltage category | Class I conforming to EN/IEC 61140 |
| IP degree of protection | IP23 vertical surface installation EN/IEC 60529 |

Ordering and shipping details

| | |
|-----------------------|--------------------------|
| Category | 22617 - XVC TOWER LIGHTS |
| Discount Schedule | XV |
| GTIN | 03606480032370 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 24.69 oz (700 g) |
| Returnability | No |
| Country of origin | ID |

Packing Units

| | |
|------------------------|--------------------|
| Unit Type of Package 1 | PCE |
| Package 1 Height | 2.60 in (6.6 cm) |
| Package 1 width | 2.60 in (6.6 cm) |
| Package 1 Length | 29.49 in (74.9 cm) |

Offer Sustainability

| | |
|----------------------------|---|
| California proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS declaration |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End of Life Information |


Contractual warranty

| | |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

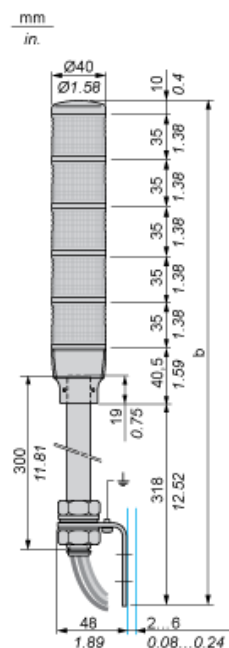

| No. of illuminated units | b Without buzzer (mm) | b Without buzzer (in.) |
|--------------------------|-----------------------|------------------------|
| 1 stage | 403.50 | 15.89 |
| 2 stages | 438.50 | 17.26 |
| 3 stages | 473.50 | 18.64 |
| 4 stages | 508.50 | 20.02 |
| 5 stages | 543.50 | 21.40 |

Pre-assembled and Pre-wired Tower Light

Support Tube Mounting

