


MQ2004



Magnetic sensor

MQ23005BFRKG/B/AM/IO/WFI/0,3M/ZH/US

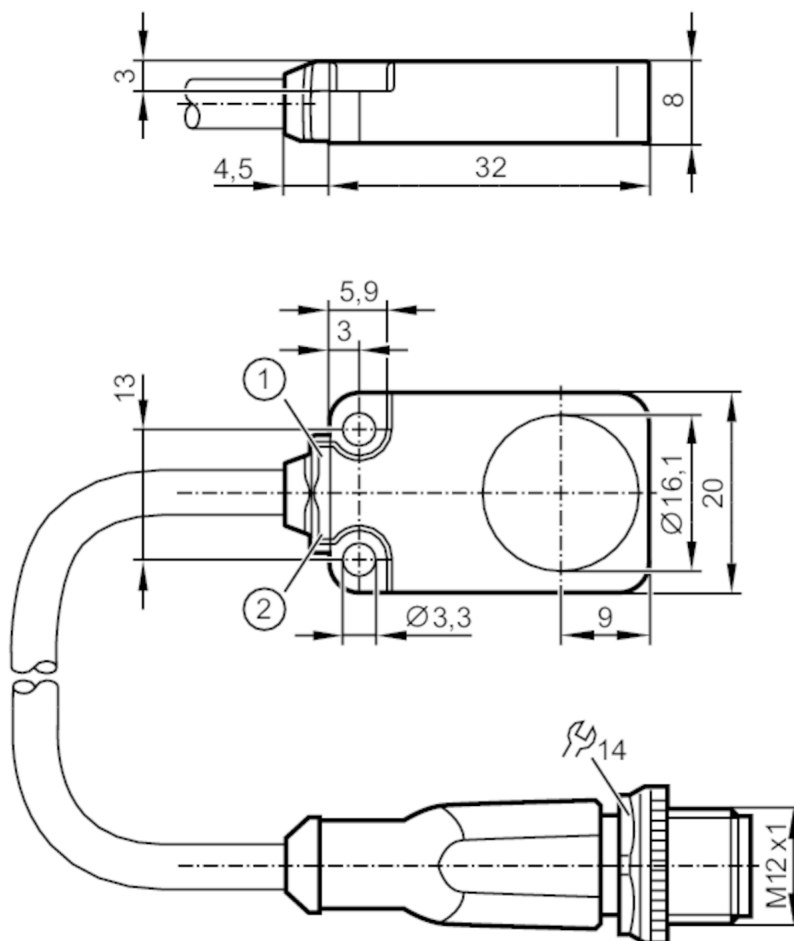

- 1 LED yellow
- 2 LED green



Product characteristics

Electrical design	PNP/NPN; (configurable)
Output function	normally open / closed; (configurable)
Sensing range [mm]	5
Communication interface	IO-Link
Housing	rectangular
Dimensions [mm]	20 x 8 x 32

Application

System	weld coated
Media	Ferrous only

MQ2004



Magnetic sensor

MQ23005BFRKG/B/AM/IO/WFI/0,3M/ZH/US

Electrical data		
Operating voltage	[V]	10...30 DC
Rated insulation voltage	[V]	60
Current consumption	[mA]	< 30
Protection class		III
Reverse polarity protection		yes
Power-on delay time	[s]	< 0.3
Outputs		
Electrical design		PNP/NPN; (configurable)
Output function		normally open / closed; (configurable)
Max. voltage drop switching output DC	[V]	2.5
Max. leakage current	[mA]	0.1
Permanent current rating of switching output DC	[mA]	100
Short-time current rating of switching output	[mA]	100
Switching frequency DC	[Hz]	200
Notes on switching frequency		suppression of extraneous fields: 10
Short-circuit protection		yes
Type of short-circuit protection		yes (non-latching)
Overload protection		yes
Monitoring range		
Sensing range	[mm]	5
Real sensing range Sr	[mm]	5 ± 10 %
Operating distance	[mm]	0...4.05
Accuracy / deviations		
Correction factor		steel: 1
Hysteresis	[% of Sr]	< 10
Switch-point drift	[% of Sr]	-10...20
Repeatability	[% of Sr]	10
Software / programming		
Parameter setting options		hysteresis / window; switch-off delay; weld-field immunity; switch-on operations; Auto-teach



Magnetic sensor

MQ23005BFRKG/B/AM/IO/WFI/0,3M/ZH/US

Interfaces		
Communication interface	IO-Link	
Transmission type	COM2 (38,4 kBaud)	
IO-Link revision	1.1	
SDCI standard	IEC 61131-9 CDV	
Profiles	Smart Sensor: Identification and diagnosis; Multi-channel, two setpoint switching sensor, type 0 Generic Profiled Sensor; Teach Channel	
SIO mode	yes	
Required master port class	A	
Min. process cycle time [ms]	9.6	
IO-Link process data (cyclical)	Function	bit length
	process value	16
	device status	4
	binary switching information	4
IO-Link functions (acyclical)	application specific tag; operating hours counter; switching cycles counter	
Supported DeviceIDs	Type of operation	DeviceID
	default	829
Note	For further information please see the IODD PDF file at "Downloads"	
Operating conditions		
Ambient temperature [°C]	-25...80	
Storage temperature [°C]	-30...85	
Protection	IP 65; IP 67	
Tests / approvals		
EMC	EN 61000-4-2 ESD	4 kV CD / 8 kV AD
	EN 61000-4-3 HF radiated	10 V/m
	EN 61000-4-4 Burst	2 kV
	EN 61000-4-6 HF conducted	10 V
	EN 55011	class B
Vibration resistance	EN 60068-2-6 Fc	20 g (10...3000 Hz) / 50 sweep cycles per frequency; 1 octave per minute in 3 axes
Shock resistance	EN 60068-2-27 Ea	100 g 11 ms half-sine; 3 shocks each in every direction of the 3 coordinate axes
Continuous shock resistance	EN 60068-2-27	40 g 6 ms; 4000 shocks each in every direction of the 3 coordinate axes
MTTF [years]	1976	
UL approval	Ta	-25...60 °C
	Enclosure type	Type 1
	voltage supply	Limited Voltage/Current
	UL approval number	C010
	File number UL	E174191
Mechanical data		
Weight [g]	45	
Housing	rectangular	
Mounting	flush mountable	
Dimensions [mm]	20 x 8 x 32	
Material	diecast zinc weld coated; LED window: TPU (urethane); potting: PUR	

MQ2004



Magnetic sensor

MQ23005BFRKG/B/AM/IO/WFI/0,3M/ZH/US

Displays / operating elements

Display	Display operation	1 x LED, green
	Switching status	1 x LED, yellow



Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 0.3 m, PUR, Ø 4.9 mm; flame-retardant (IEC 60332-2, UL: FT2)

Connection

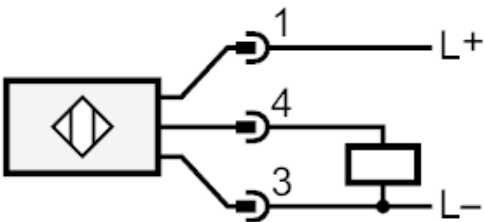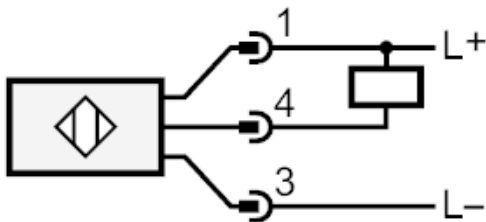

4 OUT / IO-Link

Connector: 1 x M12; Locking: Knurled nut, rotatable

