





OYA0610-20-4-18-P-1-B



The technical drawings show two vertical valve models, T and R, with their internal components labeled with circled numbers 1 through 8. Dimension lines indicate a height of 40 for the upper section and 85 for the lower section, with a total height dimension 'L' shown between the two models.



- | | |
|---|-----------------------|
| T | transmitter |
| R | receiver |
| 1 | LED yellow |
| 2 | LED red |
| 3 | 7-segment LED display |
| 4 | LED green |
| 5 | LED yellow |
| 6 | LED red |
| 7 | 7-segment LCD display |
| 8 | LED green |





Safety light curtain


OYA0610-20-4-18-P-1-B

Product characteristics		
Type of light		Infrared light
Dimensions	[mm]	711 x 35 x 45
Application		
Protective function		Access prevention hand protection
Electrical data		
Operating voltage tolerance	[%]	20
Operating voltage	[V]	24 DC
Protection class		III
Reverse polarity protection		yes
Power-on delay time	[s]	< 18
Type of light		Infrared light
Wave length	[nm]	950
Receiver		
Current consumption	[mA]	125
Transmitter		
Current consumption	[mA]	83
Outputs		
Electrical design		PNP
Number of OSSD outputs		2
Max. current load per OSSD output	[mA]	500; (24 V)
Short-circuit protection		yes
Monitoring range		
Protected area height	[mm]	610
Resolution (detection capacity d)	[mm]	20
Protection area width (low light intensity)	[m]	0...6
Protection area width (high light intensity)	[m]	3...18
Floating blanking		yes
Reaction times		
Response time	[ms]	11.5
Operating conditions		
Applications		Class C to EN 60654-1 weatherproof application
Ambient temperature	[°C]	0...55
Max. relative air humidity	[%]	95
Protection		IP 65
Tests / approvals		
EMC	IEC 61496-1	
Shock resistance	IEC 61496-1	
Vibration resistance	IEC 61496-1	



Safety light curtain

OYA0610-20-4-18-P-1-B

Safety classification		
ESPE type (IEC 61496-1)	4	
ISO 13849-1	Category 4, PL e	
IEC 61508	SIL 3	
IEC 62061	SIL cl 3	
Mission time TM	[h]	175200
Safety-related reliability PFHD	[1/h]	1.5 E -08
Mechanical data		
Weight	[g]	3605
Dimensions	[mm]	711 x 35 x 45
Material	housing: aluminum; front lens: PC	
Length L	[mm]	711
Displays / operating elements		
Display	transmitter	3 x LED
	transmitter	7-segment LCD display
	receiver	3 x LED
	receiver	7-segment LCD display
Accessories		
Items supplied	Assembly angle: 4	
	Slot nuts: 4	
	screws	
Remarks		
Pack quantity	1 pcs.	
Electrical connection - receiver		
Connector: 1 x M12; Maximum cable length: 100 m; for wire cross-section 0.34 mm²		
		


OY815S



Safety light curtain


OYA0610-20-4-18-P-1-B

Connection

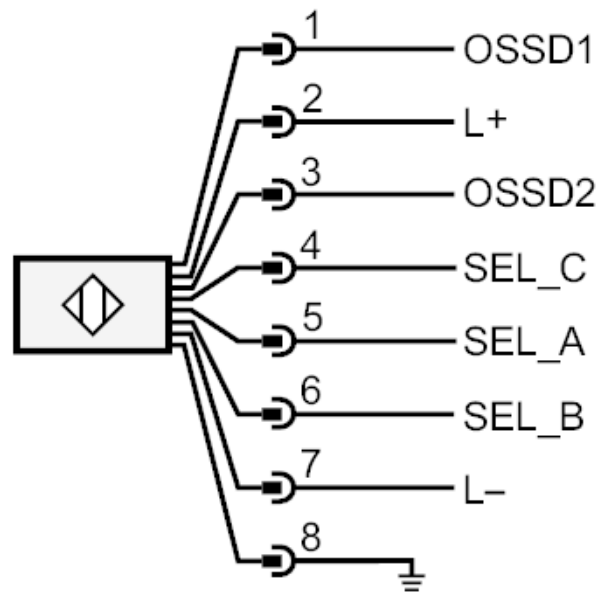

Electrical connection - transmitter

Connector: 1 x M12



OY815S



Safety light curtain

OYA0610-20-4-18-P-1-B

Connection

