


E12513



Male cordsets

ASTGH040ZDS0020H04

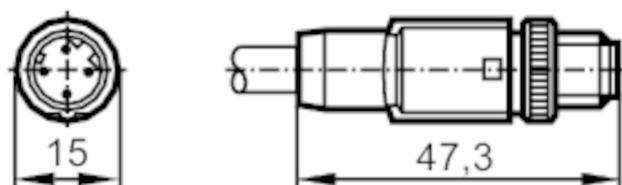

Application

System	gold-plated contacts
Design	Ethernet cable, D-coded

Electrical data

Operating voltage	[V]	< 250 AC/DC
Max. current load total	[A]	4

Operating conditions

Ambient temperature	[°C]	-40...70
Protection		IP 67

Mechanical data

Weight	[g]	1380.5
Dimensions	[mm]	15 x 15 x 47.3
Material		TPU (urethane)
Molded-body material		TPU (urethane)
Material nut		diecast zinc, nickel-plated

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 20 m, PVC, green, Ø 6.5 mm; 4 x 0.34 mm²

Electrical connection - plug

Connector: 1 x M12, straight; Moulded body: TPU (urethane); Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Shielded connection cable: shield connected

E12513




Male cordsets

ASTGH040ZDS0020H04



Connection

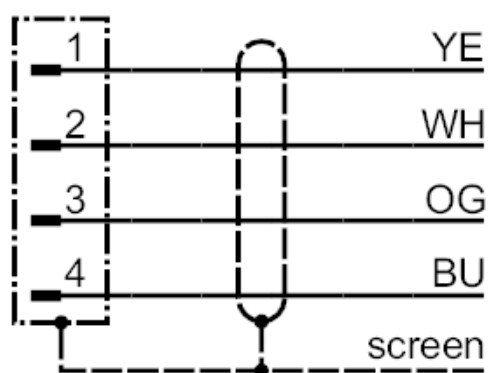

	Core colors :
BU =	blue
OG =	orange
WH =	white
YE =	yellow