


## Process adapter sanitary pipe fitting

ADAPT IFM-DIN11851 DN40/1.5"

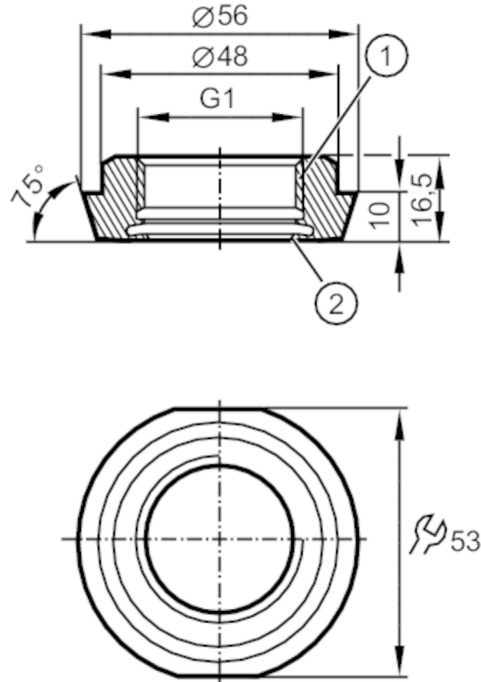

- 1 Aseptoflex Vario  
2 sealing area

EC 1935/2004 

## Application

Pressure rating [bar] 40

## Tests / approvals

Pressure equipment directive	A possible classification to PED depends on the application and has to be carried out by the user / operator.
Safety instructions	The compatibility between medium and product material has to be checked in all applications.

## Mechanical data

Weight [g]	197
Materials (wetted parts)	stainless steel (1.4435 / 316L) ; surface characteristics : Ra<0,4 / Rz 4
Sensor connection	G 1 Aseptoflex Vario
Process connection	Hygienic pipe fitting DN40 (1,5") DIN 11851
Sealing	Gasket
Hygienic equipment class to DIN 11866	H4

## Accessories

Items supplied	O-ring: 1 x 24 x 2, EPDM, FDA compliant, E30054
Accessories (optional)	O-ring: 1 x 24 x 2, FKM, FDA compliant, E30123 sealing ring: 1, PEEK, FDA compliant, E30124

## Remarks

Pack quantity	1 pcs.
---------------	--------