


E10844



Patchcords with valve plug

VVDAC041MSS00,3A03STAH030VAS

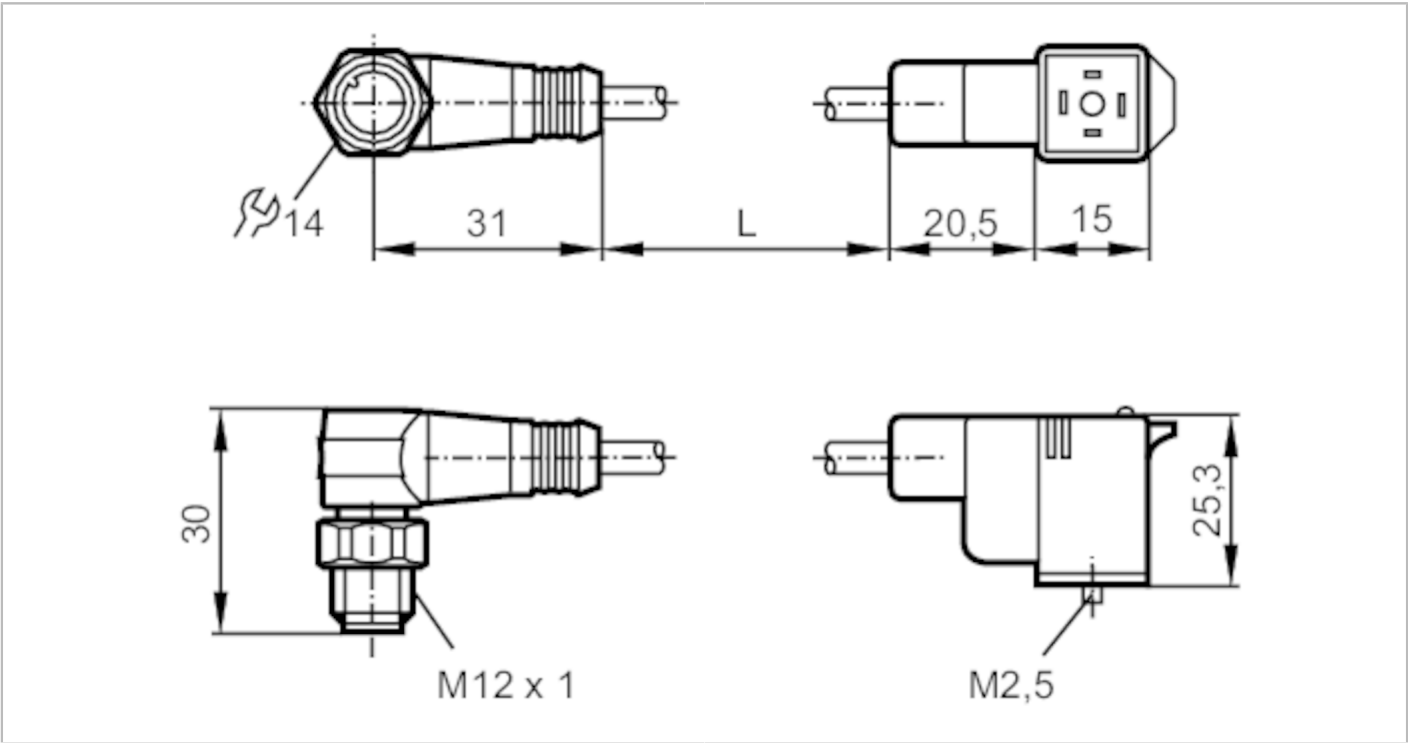

Application		
System	Halogen-free	
Electrical data		
Operating voltage	[V]	< 24 AC/DC
Overvoltage protection	yes; (VDR)	
Operating conditions		
Ambient temperature	[°C]	-25...90
Protection	IP 67	
Mechanical data		
Weight	[g]	45.7
Material	TPU (urethane)	
Molded-body material	TPU (urethane)	
Material nut	stainless steel (1.4404 / 316L)	
Displays / operating elements		
Display	Power	1 x LED, yellow
Accessories		
Items supplied	screw	
	panel for labelling	
Remarks		
Pack quantity	1 pcs.	
Electrical connection - plug		


Connector: 1 x M12, angled; Moulded body: TPU (urethane); Locking: stainless steel (1.4404 / 316L); Tightening torque: 0.5 Nm

E10844



Patchcords with valve plug


VVDAC041MSS00,3A03STAH030VAS



Electrical connection

Cable: 0.3 m, PUR, Halogen-free, black, Ø 4.8 mm; 3 x 0.5 mm² (16 x Ø 0.2 mm)

Connection

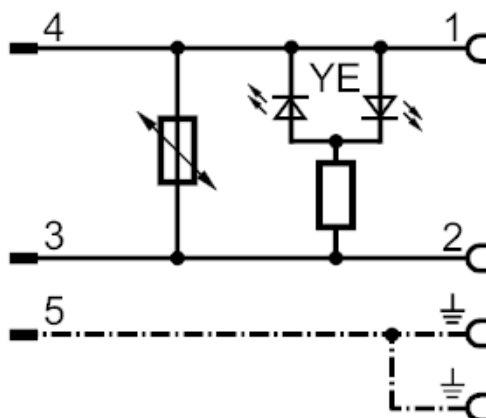

Electrical connection - Socket

Connector: 1 x valve type C DIN, angled; Moulded body: TPU (urethane); Locking: stainless steel (1.4404 / 316L); Tightening torque: 0.5 Nm

