


E12333



Male cordsets

ASTGH040MSS0010C04

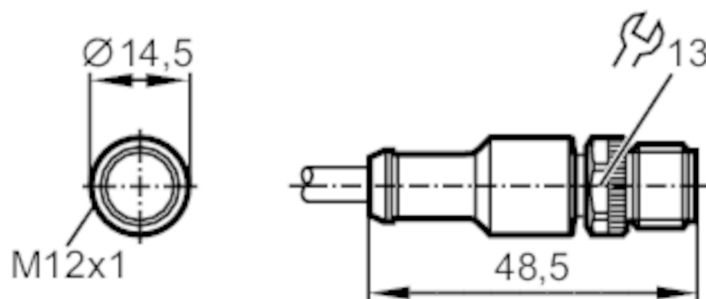

Application

System	Free from silicone; Halogen-free; gold-plated contacts; screened cable
Free from silicone	yes

Electrical data

Operating voltage [V]	< 50 AC / < 60 DC
Protection class	III
Max. current load total [A]	4

Operating conditions

Ambient temperature [°C]	-25...90
Protection	IP 68

Mechanical data

Weight [g]	386.2
Dimensions [mm]	14.5 x 14.5 x 48.4
Material	PUR
Molded-body material	PUR
Material nut	diecast zinc, nickel-plated

Remarks

Pack quantity	1 pcs.
---------------	--------

Electrical connection

Cable: 10 m, PUR, Halogen-free, black, Ø 5 mm, screened; 4 x 0.34 mm² (42 x Ø 0.1 mm)

Electrical connection - plug

Connector: 1 x M12, straight; Moulded body: PUR; Locking: diecast zinc, nickel-plated; Contacts: gold-plated; Tightening torque: 0.7...0.9 Nm; Shielded connection cable: shield not connected

E12333




Male cordsets

ASTGH040MSS0010C04



Connection

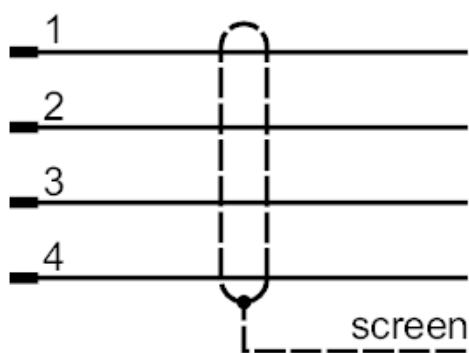

Core colors :

BK =	black
BN =	brown
BU =	blue
WH =	white