


E18165



Female wirable connectors

SDOGH080MSSFKPG

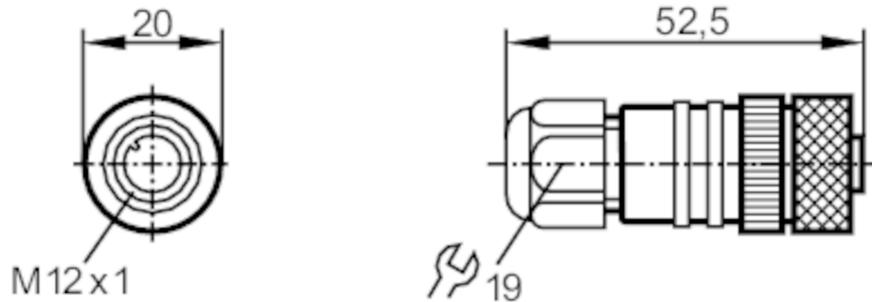

| Application | | |
|--|--|--|
| System | Free from silicone; gold-plated contacts | |
| Free from silicone | yes | |
| Electrical data | | |
| Operating voltage [V] | < 125 AC/DC | |
| Max. current load total [A] | 4; (...40 °C) | |
| Operating conditions | | |
| Ambient temperature [°C] | -25...100 | |
| Protection | IP 68 | |
| Mechanical data | | |
| Weight [g] | 45.4 | |
| Dimensions [mm] | 20 x 20 x 52.5 | |
| Material | PA | |
| Molded-body material | PA | |
| Material nut | brass, nickel-plated | |
| Remarks | | |
| Pack quantity | 1 pcs. | |
| Electrical connection | | |
| terminals: ...0.75 mm ² ; Cable sheath: Ø 6...8 mm | | |
| Electrical connection - Socket | | |
| Connector: 1 x M12, straight; Moulded body: PA; Locking: brass, nickel-plated; Contacts: gold-plated | | |

E18165



Female wirable connectors

SDOGH080MSSFKPG



Connection

