


E11187



Patchcords with valve plug

VVDAA040MSS0001H03STGH020MSS

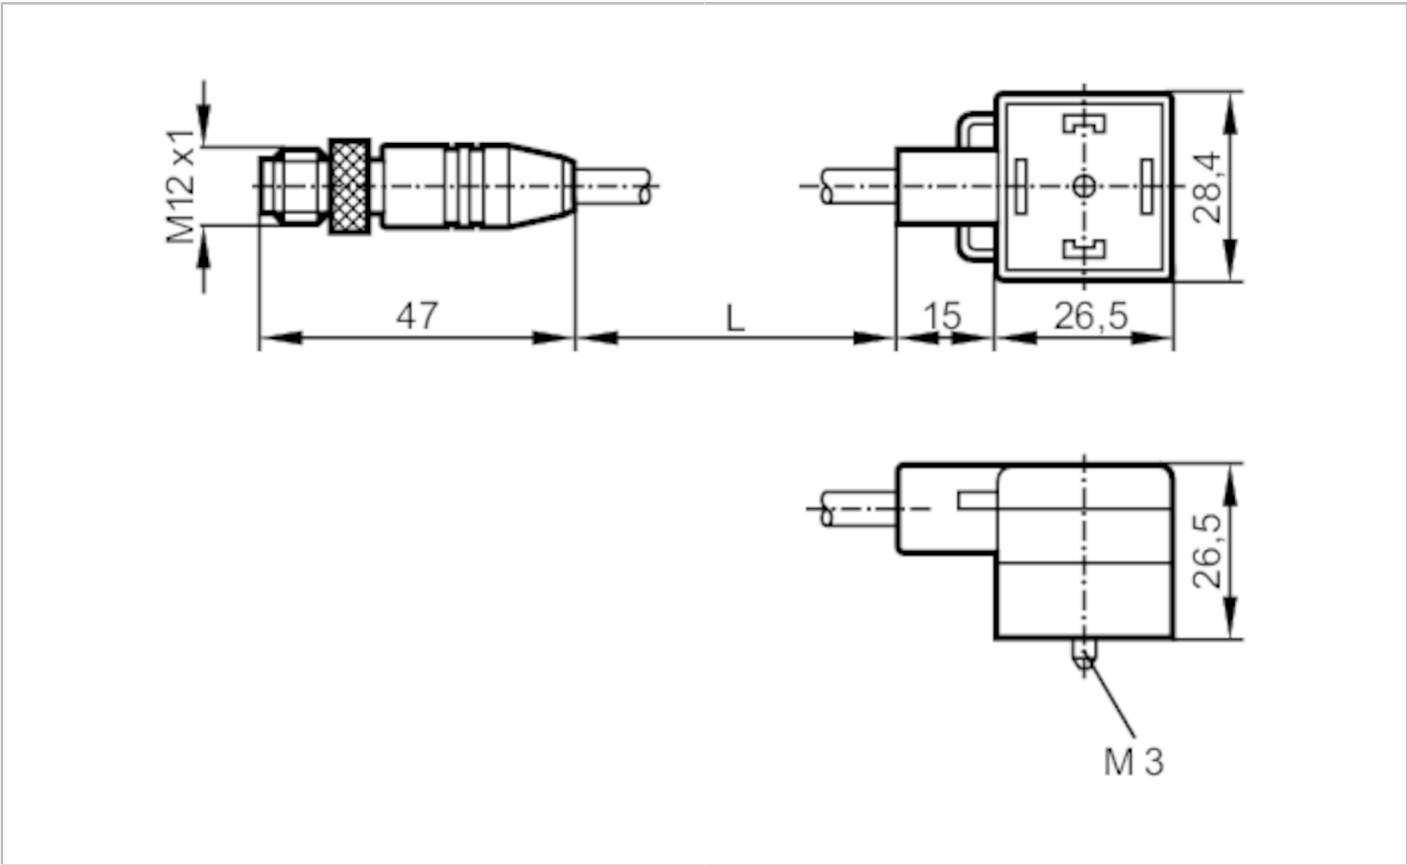

Application	
Application	current measurement
Electrical data	
Operating voltage	[V] < 24 AC/DC
Operating conditions	
Ambient temperature	[°C] -40...90
Protection	IP 67; IP 69K
Mechanical data	
Weight	[g] 99.4
Material	TPU (urethane)
Molded-body material	TPU (urethane)
Material nut	brass, nickel-plated
Accessories	
Items supplied	screw
	panel for labelling
Remarks	
Pack quantity	1 pcs.
Electrical connection - plug	
Connector: 1 x M12, straight; Moulded body: TPU (urethane); Locking: brass, nickel-plated; Tightening torque: 0.5 Nm	

E11187



Patchcords with valve plug


VVDAA040MSS0001H03STGH020MSS



Electrical connection

Cable: 1 m, PUR; 2 x 0.75 mm²

Connection

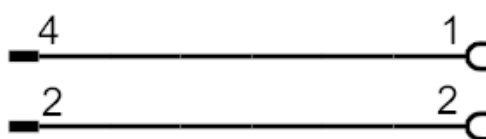

Electrical connection - Socket

Connector: 1 x valve type A DIN, angled; Moulded body: TPU (urethane); Locking: brass, nickel-plated; Tightening torque: 0.5 Nm

