




Wiring block

ZDO6H050MSS0000-00STAK190MSS

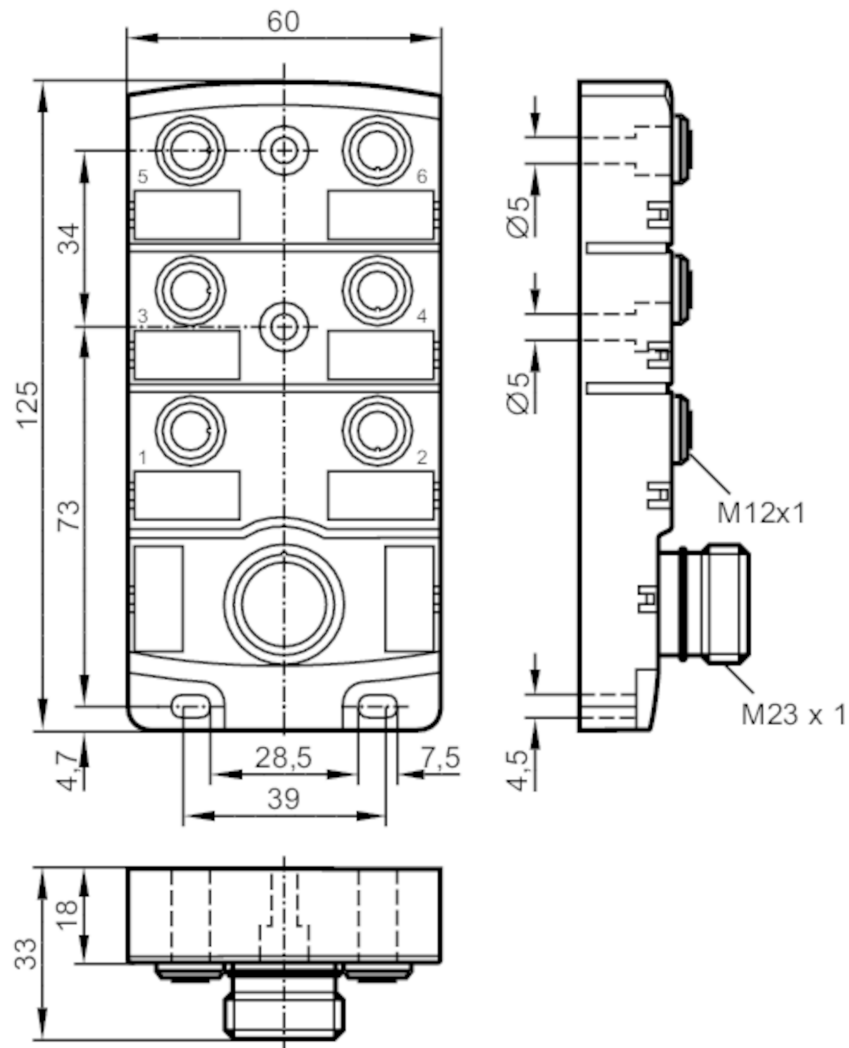


Application		
System		Free from silicone; gold-plated contacts
Free from silicone		yes
Electrical data		
Operating voltage	[V]	< 30 AC/DC; (cULus - Class 2 source required)
Max. current load per module/slot	[A]	4
Max. current load total	[A]	12



Wiring block

ZDO6H050MSS0000-00STAK190MSS


Operating conditions		
Ambient temperature	[°C]	-25...80
Protection		IP 67
Tests / approvals		
UL approval	Enclosure type	Type 1
Mechanical data		
Weight	[g]	252.5
Material		PA
Molded-body material		PA
Number of ports splitter box		6
Connector type		M12
Accessories		
Items supplied		Protective caps: 2
		labels: 6
Remarks		
Pack quantity		1 pcs.
Electrical connection - Connection		
Connector: 1 x M23; Moulded body: PA; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm		
		



Wiring block

ZDO6H050MSS0000-00STAK190MSS

Connection

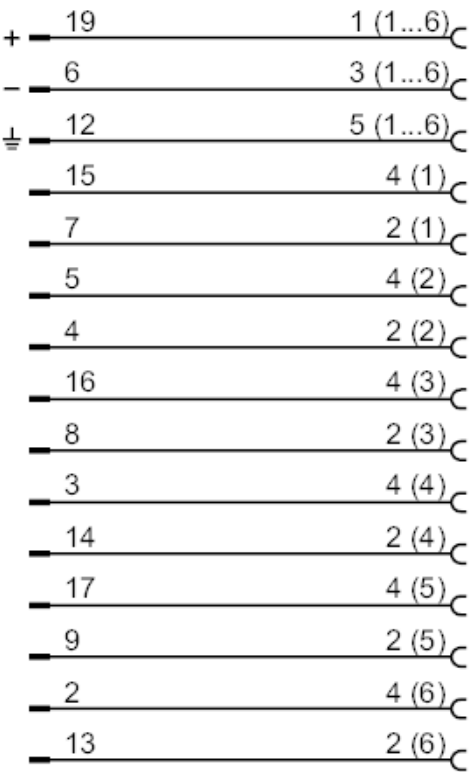

Electrical connection - slot

Connector: 6 x M12; Moulded body: PA; Contacts: gold-plated; Tightening torque: 0.8...1.5 Nm

