



Female cordset

ADOGH040MSS0005C04

No scale drawing available



Application		
System	Free from silicone; Halogen-free; gold-plated contacts; screened cable; Drag chain suitability	
Free from silicone	yes	
Electrical data		
Operating voltage	[V]	< 50 AC / < 60 DC
Protection class		III
Max. current load total	[A]	4
Operating conditions		
Ambient temperature	[°C]	-25...85
Note on ambient temperature		21 days: -25...120 °C
Protection		IP 67
Mechanical data		
Weight	[g]	269.7
Dimensions	[mm]	28 x 15 x 38
Material		TPU (urethane)
Molded-body material		TPU (urethane)
Material nut		diecast zinc
Drag chain suitability		yes
Drag chain suitability	Bending radius	min. 10 x cable diameter
Remarks		
Pack quantity	1 pcs.	

E12638



Female cordset


ADOGH040MSS0005C04

Electrical connection


Cable: 5 m, PUR, Halogen-free, black, Ø 5 mm, screened; 4 x 0.34 mm² (42 x Ø 0.1 mm)

Electrical connection - Socket

Connector: 1 x M12, straight; Moulded body: TPU (urethane); Locking: diecast zinc; Contacts: gold-plated; Tightening torque: 0.7...0.9 Nm; Shielded connection cable: shield not connected



Connection

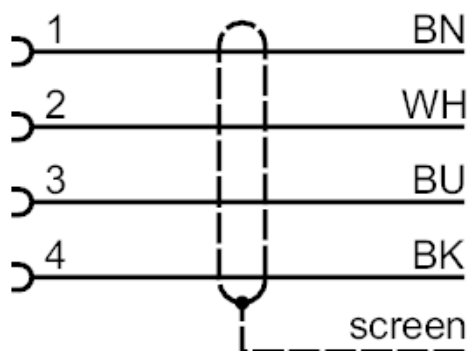

Core colors :

BK =	black
BN =	brown
BU =	blue
WH =	white