


FEMALE USB TYPE A

SOUTH AFRICA, INDIA 16A-250V, 5A/6A-250V POWER OUTLET, TYPE M & TYPE D SOCKETS

PANEL CUTOUT

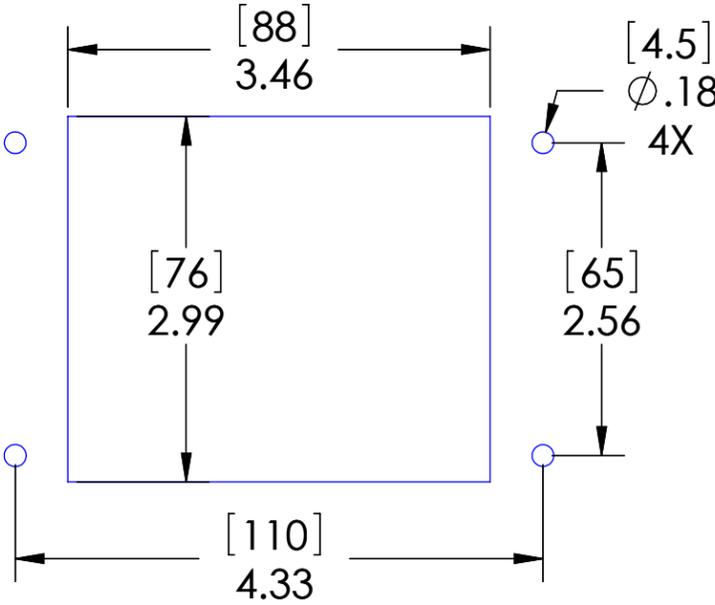

MOUNTING KIT ORDERED SEPARATELY CONTAINS M4x0.7 SS SCREW, NYLON WASHER, SPLIT LOCKWASHER AND M4 NUT
P/N: D-PIC-MT

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

HOUSING MATERIALS	
BODY:	EPOXY COATED DIE CAST ALUMINUM
GASKET:	THERMOPLASTIC ELASTOMER
HANDLE:	POLYAMIDE
LEVERS:	STAINLESS STEEL

UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES AND [MM]	
MATERIAL	
FINISH	
DO NOT SCALE DRAWING	

PIC RATINGS/SPECIFICATIONS	
VOLTS:	250V
AMPS:	3A
SCCR:	0.2kA
NEMA/UL EN 60529:	4, 4X, 12 IP65
MOUNTING SCREW SIZE:	M4 (8-32) (304 or 316SS for 4X)
MOUNTING SCREW TORQUE:	1.2~1.8N-m (0.9~1.3 Lb-Ft)
INCOMING POWER WIRE SIZE:	0.5 ~ 4.0 sq mm / 20-12AWG
WIRE STRIP LENGTH:	10 ~ 11 mm

PART NUMBER	LENGTH "L"
DIN-USB-03-R-32	3 FEET
DIN-USB-06-R-32	6 FEET
DIN-USB-10-R-32	10 FEET

DRAWN BY: DCG		MENCOM CORPORATION TITLE: CC; INDIA RCPT M/D; USB ZZ; 3A; 32		
DRAWN DATE: 05/07/2018				
CHECKED BY: JJH				
CHECK DATE: 05/07/2018				
COMMENTS:		SIZE: B	DWG. NO.: DIN-USB-ZZ-R-32	REV: B
SCALE: 2:3	WEIGHT:	SHEET 1 OF 1		