

CV V-TYPE lever version

inserts		page:
CD	40 poles + ⊕	70
CDD	72 poles + ⊕	79
CDS	27 poles + ⊕	-
CDSH	27 poles + ⊕	88
CNE	16 poles + ⊕	112
CSE	16 poles + ⊕	-
CSH	16 poles + ⊕	112
CSH S	16 poles + ⊕	124
CCE	16 poles + ⊕	132
CMSH, CMCE	6+2 (aux) poles + ⊕	138 - 139
CSS	16 poles + ⊕	150
CT, CTS (10A) *)	40 poles + ⊕	156
CT, CTSE (16A) *)	16 poles + ⊕	162
CQE	32 poles + ⊕	170
CQEE	40 poles + ⊕	176
CP	6 poles + ⊕	178
CX	6/12, 6/36 and 12/2 poles + ⊕	197 - 199
CX	4/0 and 4/2 poles + ⊕	200 - 201
MIXO	4 modules	262 - 317

*) can be used only in bulkhead mounting housings

bulkhead mounting housings with single lever in stainless steel




bulkhead mounting housings with single lever in stainless steel




description	part No.	part No.
with lever and gasket, size "77.27"	CVI 16 L	
with lever, gasket and cover in aluminium, size "77.27"		CVI 16 LS
with lever, gasket and cover in plastic, size "77.27"		CVI 16 LP

The enclosures ensure IP66/IP69 (or IP65 cover versions) degree of protection when mated and locked with the closing levers.


panel cut-out for bulkhead mounting housings

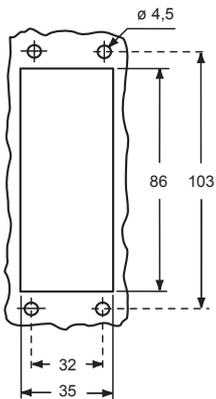

CVI L

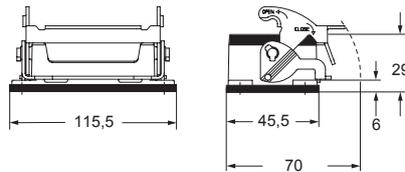

CVI LS/LP

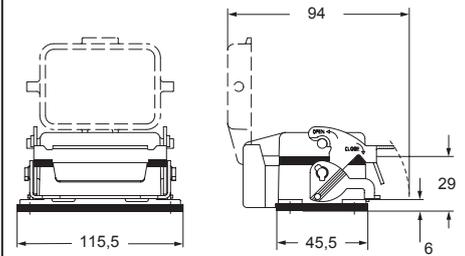

Hoods (from page 404)



CVI® US Type 4/4X/12



CVI® US Type 4/4X/12 (except enclosures with plastic cover)



V-TYPE IP65/IP66