


PANEL CUTOUT

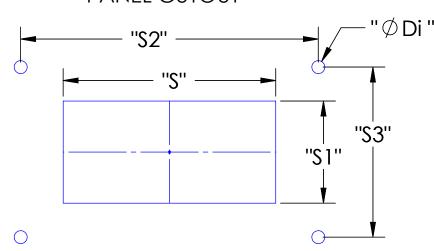

Mounting: mounting in wall thickness from 1,5 - 2,0mm, for walls with thickness larger 2,0 mm the KADL can be fixed with screws

GROMMETS							
SMALL PART #:	Cable Range	LARGE PART #:	Cable Range:				
TK-3-5	3-5MM	TG-15-17	15-17MM				
TK-5-7	5-7MM	TG-17-19	17-19MM				
TK-7-9	7-9MM	TG-19-21	19-21MM				
TK-9-11	9-11MM	TG-21-23	21-23MM				
TK-11-13	11-13MM	TG-23-25	23-25MM				
TK-13-15	13-15MM	TG-25-27	25-27MM				
TK-15-16	15-16MM	TG-27-29	27-29MM				
TK-G	BLANK	TG-29-31	29-31MM				
		TG-31-32.5	31-32.5MM				
		TG-G	BLANK				

GROMMETS MUST BE ORDERED SEPARATELY AS ACCESSORIES OF THE KADL CABLE SYSTEM. REF. DRAWINGS TK-ZZ & TG-ZZ FOR DETAILS

MATERIAL SPECIFICATIONS:				
RATING:	IP65 (When cable O.D. matches appropriately sized grommet.)			
BODY:	POLYAMIDE PA6 V-0			
TEMP:	30 C TO +100C (22 F TO +212 F)			

"H1" → **GROMMETS ORDERED SEPARATELY** PROVIDE STRAIN RELIEF AND A CLAMPING

MODULE LOCKS (2X)



KADL-EXP (EXPANSION INSERT) (NOT INCLUDED)

SCALE: 1:2

HOLE GROUP # OF **PART NUMBER:** "L" MM "L1" MM "H" MM | "H1" MM **ENTRIES** SIZE MM KADL-6K-2G 125 X 80 32.3 6 & 2 153 108 8.9 PLUS 1 KADL-EXP* 11 & 2 125 X 102.5 153 130.5 32.3 8.9 PLUS 2 KADL-EXP* 16 & 2 125 X 125 153 153 32.3 8.9 *KADL-EXP (SOLD SEPERATLEY) PLUS 5 153 27 32.3 8.9

-GROMMET OPENINGS (REF. NOTE)

-CUTOUT LOCKS (2X)

"L1"

SYSTEM FEATURES

TOOL FREE ENTRY AND CONNECTION

EASY ENLARGENTS AND ADJUSTMENTS

MODULAR DESIGN

HIGH PACKAGING DENSITY

STRAIN RELIEF FOR CABLES

CLAMPING RANGE 3MM - 16MM

UNLESS OTHERWISE SPECIFIED:	DRAWN BY	DCG	MENCOM CORPORATION	
DIMENSIONS ARE IN MM	DRAWN DATE	06/09/2020		
	CHECKED BY	ADM	TITLE:	
	CHECK DATE	06/09/2020		
			KADL MODULAR CABLE ENTRY SYS	

COMMENTS: SIZE DWG. NO. B SCALE: 3:4 DO NOT SCALE DRAWING

KADL-6K-2G

WEIGHT: SHEET 1 OF 1

REV

PROHIBITED.

PROPRIETARY AND CONFIDENTIAL

REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS

THE INFORMATION CONTAINED IN THIS

DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY

RANGE OF 15MM - 32.5MM (REF. NOTE)

3

MATERIAL

GROMMETS ORDERED SEPARATELY

RANGE OF 3MM - 16MM (REF. NOTE)

PROVIDE STRAIN RELIEF AND A CLAMPING

2