

Completely pre-assembled Signal Towers / KOMPAKT 37

## K37cl sr cable EM 24VAC/DC BU/GN/YE/RD



|           |            |
|-----------|------------|
| Part No.: | 698.350.75 |
| Series:   | Kompakt 37 |



### MECHANICAL DATA

|                              |                             |
|------------------------------|-----------------------------|
| Height                       | 209 mm                      |
| Diameter                     | 38 mm                       |
| Materials                    | PC                          |
| Dome colour                  | Clear                       |
| Housing colour               | Silver                      |
| Protection category          | IP65                        |
| Connection                   | Cable                       |
| cross-sectional area maximum | 0,34mm <sup>2</sup> / 22AWG |
| Cable entry                  | Membrane grommet            |
| Cable entry minimum          | d = 1 mm                    |
| Cable entry maximum          | d = 9 mm                    |
| Cable length                 | 2000 mm                     |
| Tension relief               | Pull-out protection         |
| Type of fixing               | Built-in mounting           |
| Working temperature minimum  | -20°C                       |
| Working temperature maximum  | +50°C                       |
| Weight with packaging        | 237 g                       |
| Product weight               | 195 g                       |

### ELECTRICAL DATA

|                             |                           |
|-----------------------------|---------------------------|
| Operating voltage           | 24V                       |
| Operating voltage type      | AC/DC                     |
| Operating voltage frequency | 50Hz                      |
| Operating voltage tolerance | +/- 10%                   |
| Rated operational voltage   | 24 VDC                    |
| Rated operational current   | 135 mA                    |
| Rated inrush current        | 500 mA                    |
| Protection class            | Protection class 2        |
| Pollution degree            | 3                         |
|                             | In the connection area: 2 |

### OPTICAL DATA

|                      |                                |
|----------------------|--------------------------------|
| Light source         | LED                            |
| Light colour         | Blue<br>Green<br>Red<br>Yellow |
| Optical signal image | Permanent                      |
| Service life optical | 50,000 h maximum               |



For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / KOMPAKT 37

**K37cl sr cable EM 24VAC/DC BU/GN/YE/RD**

| APPROVAL DATA               |                    |
|-----------------------------|--------------------|
| Conforms with CE            | Yes                |
| WEEE                        | Yes                |
| Conforms with RED directive | No                 |
| Conform with ATEX-directive | No                 |
| Conforms with CCC           | No                 |
| Conforms with UL            | cULus              |
| UL Type Rating              | Type 12<br>Type 4X |
| Conforms with FCC           | No                 |
| Conforms with IC            | No                 |
| EAC certificate available   | Yes                |
| Conforms with AS-I          | No                 |
| ICAO Certification          | No                 |
| Conforms with GL            | No                 |
| Conforms with RoHS CN       | No                 |
| Conforms with VdS           | No                 |




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / KOMPAKT 37

**K37cl sr cable EM 24VAC/DC BU/GN/YE/RD**

**DRAWING**

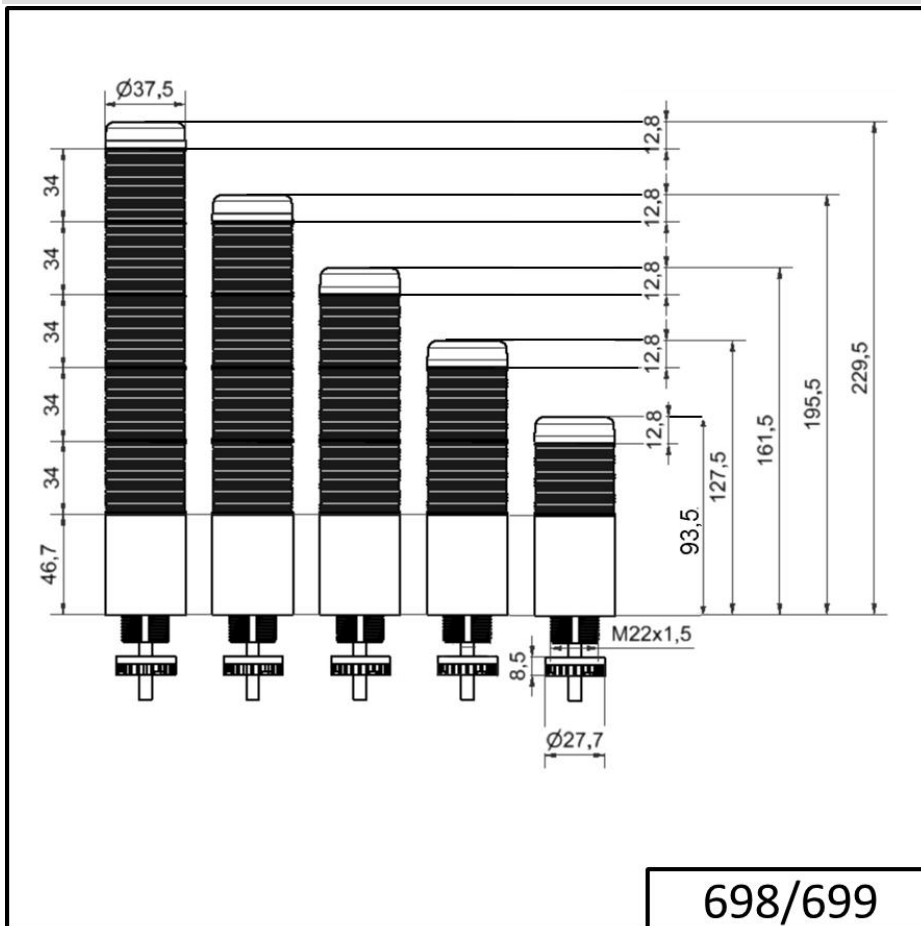

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.