

Completely pre-assembled Signal Towers / KOMPAKT 37

K37 plug EM Pulse tone 24VAC/DC BU/WH/GN



Part No.:	699.260.75
eries:	Kompakt 37

MECHANICAL DATA				
Height	243 mm			
Diameter	38 mm			
Materials	PC			
Dome colour	Blue Clear Green Red Yellow			
Housing colour	Black			
Protection category	IP65			
Connection	M12 plug 8-pole			
Cable entry	Membrane grommet			
Cable entry minimum	d = 1 mm			
Cable entry maximum	d = 9 mm			
Tension relief	Pull-out protection			
Type of fixing	Built-in mounting			
Working temperature minimum	-20°C			
Working temperature maximum	+50°C			
Weight with packaging	173 g			
Product weight	119 g			

ELECTRICAL DATA				
Operating voltage	24V			
Operating voltage type	AC/DC			
Operating voltage frequency	50Hz			
Operating voltage tolerance	+/- 10%			
Rated operational voltage	24 VDC			
Rated operational current	200 mA			
Rated inrush current	500 mA			
Protection class	Protection class 2			
Pollution degree	3 In the connection area: 2			

OPTICAL DATA			
Light source	LED		
Light colour	Blue Green Red White Yellow		

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

Optical signal image

K37 plug EM Pulse tone 24VAC/DC BU/WH/GN

Service life optical	50,000 h maximum			
ACUSTICAL DATA				
Volume (max) at 1m distance	85,0 dB (A)			
Acoustic signal image	Pulse tone			
Audio frequency	2900 Hz			
Acoustic service life	5,000 h minimum			
ADDDOWAL DATA				
APPROVAL DATA				

Permanent


APPROVAL DATA			
Conforms with CE	Yes		
WEEE	Yes		
Conforms with RED directive	No		
Conform with ATEX-directive	No		
Conforms with CCC	No		
Conforms with UL	CULus		
UL Type Rating	Type 12 Type 4X		
Conforms with FCC	No		
Conforms with IC	No		
EAC certificate available	Yes		
Conforms with AS-I	No		
ICAO Certification	No		
Conforms with GL	No		
Conforms with RoHS CN	No		
Conforms with VdS	No		

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / KOMPAKT 37

K37 plug EM Pulse tone 24VAC/DC BU/WH/GN

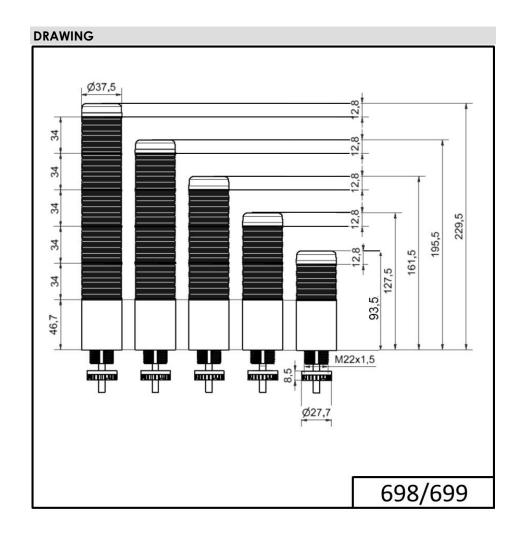

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.