

KombiSIGN 40 / ClassicLOOK

# TwinLIGHT Classic 24VAC/DC RD



|           |              |
|-----------|--------------|
| Part No.: | 634.110.75   |
| Series:   | KombiSIGN 40 |



## MECHANICAL DATA

|                             |               |
|-----------------------------|---------------|
| Height                      | 59 mm         |
| Diameter                    | 40 mm         |
| Materials                   | PC            |
| Dome colour                 | Red           |
| Protection category         | IP66<br>IP69K |
| Working temperature minimum | -30°C         |
| Working temperature maximum | +60°C         |
| Weight with packaging       | 39 g          |
| Product weight              | 29 g          |

## ELECTRICAL DATA

|                             |                    |
|-----------------------------|--------------------|
| Operating voltage           | 24V                |
| Operating voltage type      | AC/DC              |
| Operating voltage frequency | 50Hz               |
| Operating voltage tolerance | +/- 10%            |
| Rated operational voltage   | 24 VDC             |
| Rated operational current   | 30 mA              |
| Rated inrush current        | 500 mA             |
| Protection class            | Protection class 3 |
| Pollution degree            | 3                  |
| Request to external PSU     | SELV/PELV          |

## OPTICAL DATA

|                      |                  |
|----------------------|------------------|
| Light source         | LED              |
| Light colour         | Red              |
| Optical signal image | TwinLight        |
| Blink frequency (Hz) | 1 Hz             |
| Service life optical | 50,000 h maximum |

## APPROVAL DATA

|                             |         |
|-----------------------------|---------|
| Conforms with CE            | Yes     |
| WEEE                        | Yes     |
| Conforms with RED directive | No      |
| Conform with ATEX-directive | No      |
| Conforms with CCC           | No      |
| Conforms with UL            | cULus   |
| UL Type Rating              | Type 12 |
| Conforms with FCC           | No      |




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 40 / ClassicLOOK

**TwinLIGHT Classic 24VAC/DC RD**

|                           |     |
|---------------------------|-----|
| Conforms with IC          | No  |
| EAC certificate available | Yes |
| Conforms with AS-I        | No  |
| ICAO Certification        | No  |
| Conforms with GL          | No  |
| Conforms with RoHS CN     | No  |
| Conforms with VdS         | No  |

**DRAWING**

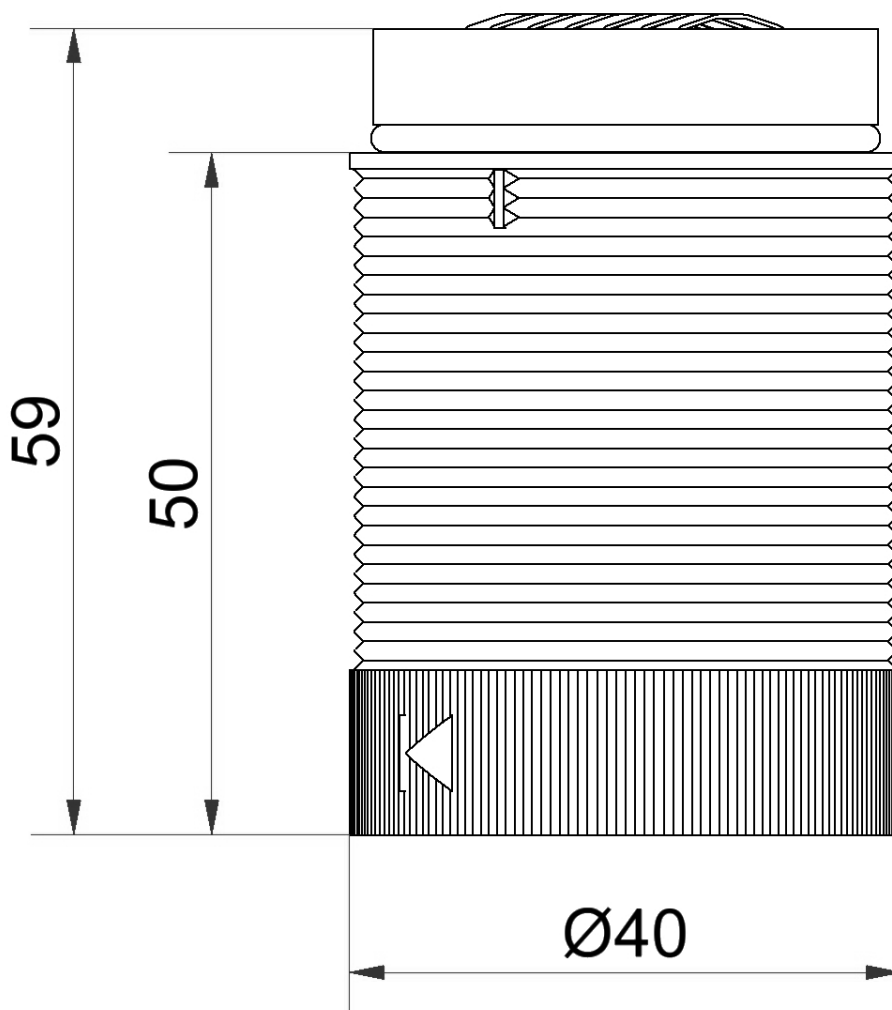

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.