



MST 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 500VA IN: 230/400VAC OUT: 230VAC

Single-phase - Control and Isolation Transformers
500 VA
Isolation class T 40/B
Other voltages on request.

Link to Product

Illustration

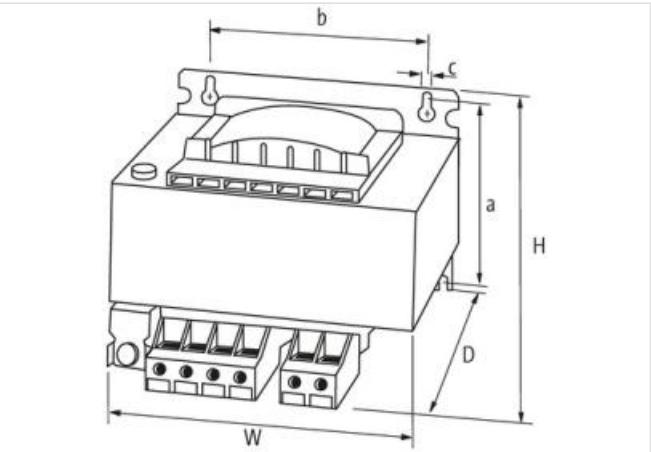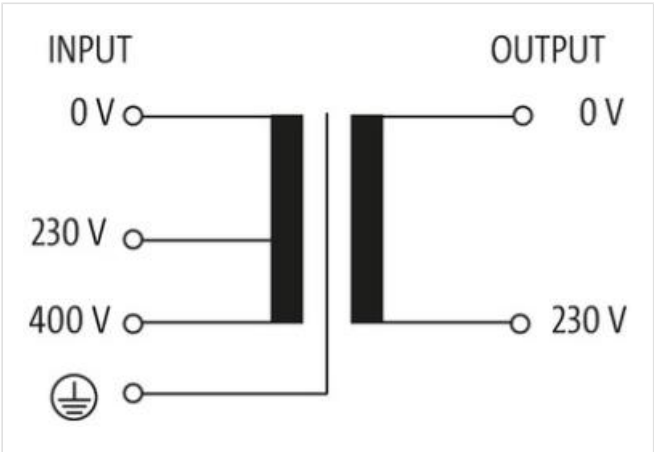

Product may differ from Image



General data	
Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Key-hole mounting
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	5.8×10 mm
Fixing centers a×b×c	87×104×5.8 mm

Dimensions H×W×D 108×135×133.6 mm

Output

Output voltage 230 V AC

Output rating 500 VA

Input

Input voltage 230/400 V AC

Inrush current 28.1 A (230 V AC); 16.3 A (400 V AC)

Short-circuit current 54 A (230 V AC); 31.2 A (400 V AC)

Input current 2.4 A (230 V AC); 1.4 A (400 V AC)

Frequency 50...60 Hz

Product article number of manufacturer 86308