



MET 1-PHASE SAFETY TRANSFORMER

P: 500VA IN: 230VAC+/- 5% OUT: 24VAC

Single-phase safety transformer  
500 VA  
Isolation class T 60/B

[Link to Product](#)

Illustration

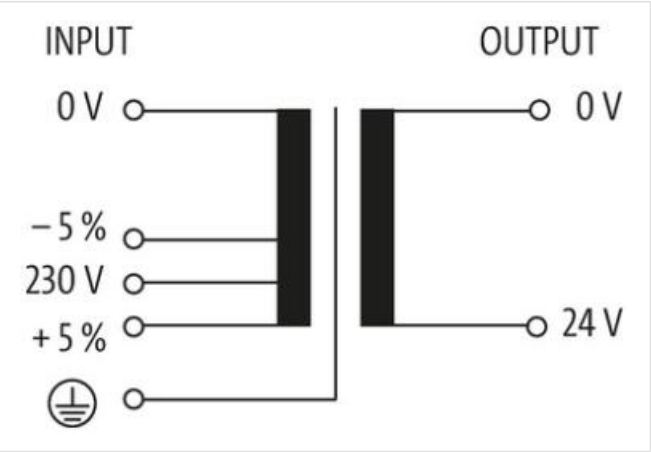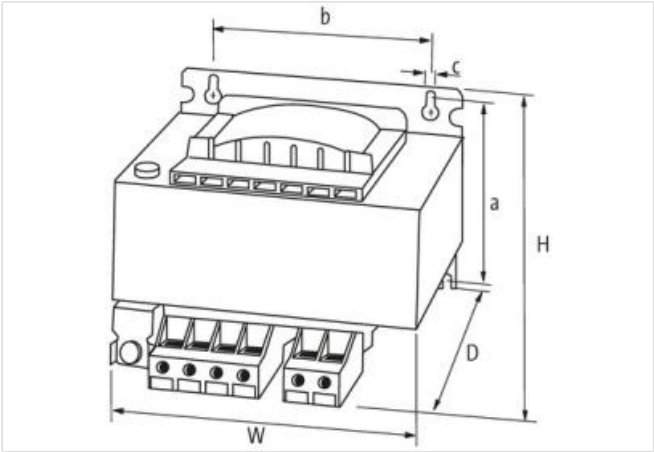

Product may differ from Image



| General data           |   |
|------------------------|---|
| Standards              | EN 61558-1, EN 61558-2-6, EN 62041 category 0   |
| Mounting method        | Key-hole mounting                               |
| Temperature range      | -20...+60 °C (storage temperature -40...+80 °C) |
| Test isolation voltage | 4 kV (prim./sec.)                               |
| Drill hole Ø           | 7x11 mm   |
| Fixing centers a×b×c   | 90×122×7 mm                                     |
| Dimensions H×W×D       | 112.6×150×146 mm                                |

| Output                                 |                    |
|--|--------------------|
| Output voltage                         | 24 V AC (SELV)     |
| Output rating                          | 500 VA             |
| Input                                  |                    |
| Input voltage                          | 230 V AC $\pm 5\%$ |
| Inrush current                         | 35.45 A (230 V AC) |
| Short-circuit current                  | 74.76 A (230 V AC) |
| Input current                          | 2.3 A (230 V AC)   |
| Frequency                              | 50...60 Hz         |
| Product article number of manufacturer |                    |
| 86023                                  |                    |