
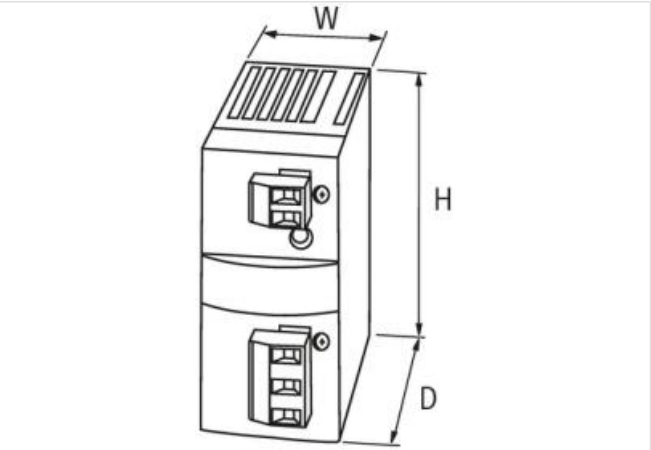


MCS-B POWER SUPPLY 1-PHASE,
IN: 90-265VAC OUT: 12-15V/2,5ADC

INPUT: 95...265 V AC
OUTPUT: 12 V DC $\pm 1\%$
Current: 2.5 A

[Link to Product](#)

Illustration

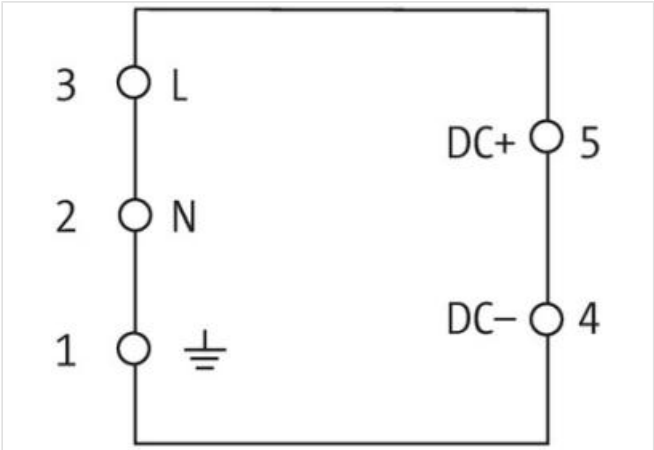

Product may differ from Image

General data	
Standards	IEC 61010-2-201, EN 61204-3, EN 55022 B, EN 61000-3-2
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	0...+40 °C, ...+50 °C derating (storage temperature -20...+85 °C)
Relative humidity	5...95%, no condensation
Efficiency	82%
Dimensions H×W×D	76×38×87.5 mm
Output	
Output voltage	12 V DC (SELV), $\pm 1\%$; 12...15 V adjustable
LED display	LED (green) for output voltage
Output current	2.5 A (+40 °C); 2.1 A (+55 °C)
Mains failure bridging time	min. 20 ms (115 V AC); min. 110 ms (230 V AC)

Ripple	max. 50 mV eff/rms
Spikes	max. 120 mV ss/pp
Unit protection	short-circuit and overload protected
Parallel usage/serial usage	no/yes (max. 2 units)

Input

Input voltage	95...265 V AC; 110...300 V DC
Primary fusing external	max. 10 A
Input current	0.56 A (115 V AC); 0.31 A (230 V AC)
Inrush current after 1 ms	max. 20 A
Frequency	50...60 Hz

Product article number of manufacturer	85373
--	-------