
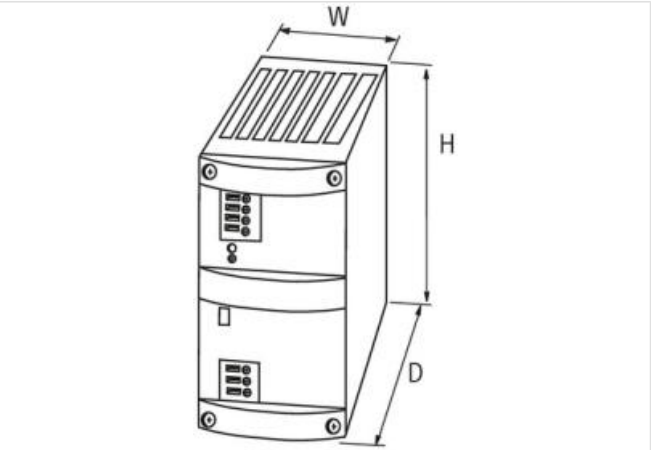


MCS POWER SUPPLY 1-PHASE,
IN: 90-265VAC OUT: 24-28V/20ADC

INPUT: 90...265 V AC
OUTPUT: 24...28 V DC
Current: 20 A

Link to Product

Illustration

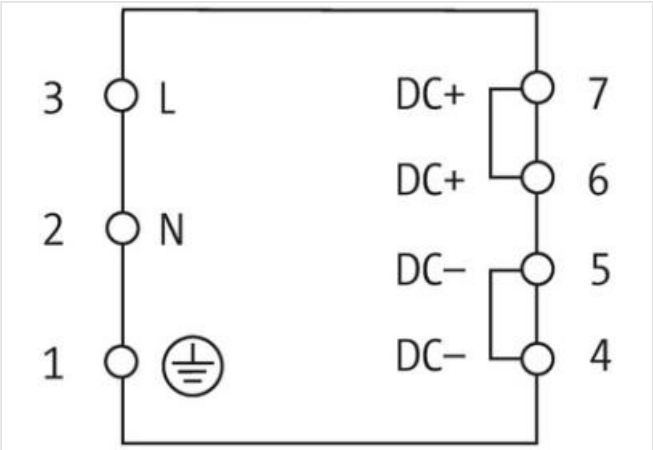

Product may differ from Image



General data	
Standards	IEC 61010-2-201, EN 61204-3, EN 55022 B, EN 61000-3-2
Mounting method	Screw fixing M4, 4 pcs. in rectangle 60×197 mm
Temperature range	0...+60 °C (storage temperature -25...+85 °C)
Relative humidity	5...95%, no condensation
Efficiency	87% (230 V AC)
Dimensions H×W×D	209×84×233 mm
Output	

Output voltage	24 V DC (SELV), $\pm 1\%$; 24...28 V adjustable
LED display	LED (green) for output voltage
Selectable switch-off mode	front sided plug link (automatic re-start or definite shut-off)
Output current	20 A (+60 °C); 24 A (+40 °C, 110...265 V AC)
Mains failure bridging time	min. 18 ms (230 V AC)
Ripple	max. 20 mV eff/rms
Spikes	max. 250 mV ss/pp
Unit protection	short-circuit and overload protected
Parallel usage/serial usage	max. 5 units/max. 2 units

Input

Input voltage	90...265 V AC/110...300 V DC
Primary fusing external	max. 16 A
Input current	5.5 A (100 V AC); 2.4 A (230 V AC)
Inrush current after 1 ms	max. 30 A
Frequency	50...60 Hz

Product article number of manufacturer	85063
--	-------