



MKN POWER SUPPLY 1-PHASE, LINEAR REGULATED

IN: 230VAC OUT: 2x10V/0,1ADC

INPUT: 230 V AC
OUTPUT: +-10 V DC
Current: 2x 50 mA
This power supply units meet the (EN 61000-3-2) standard for harmonic current.

Link to Product

Illustration

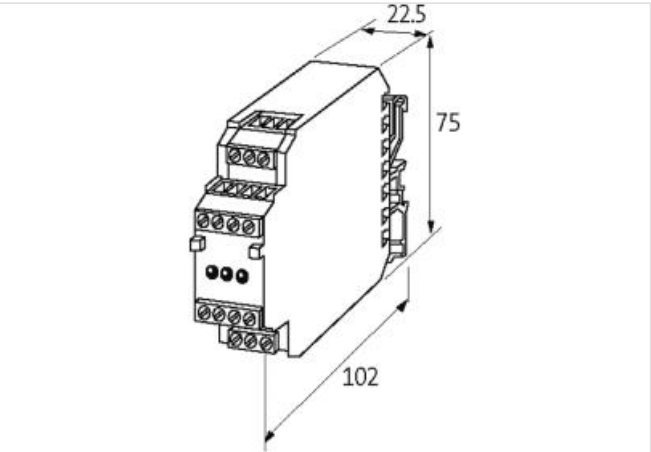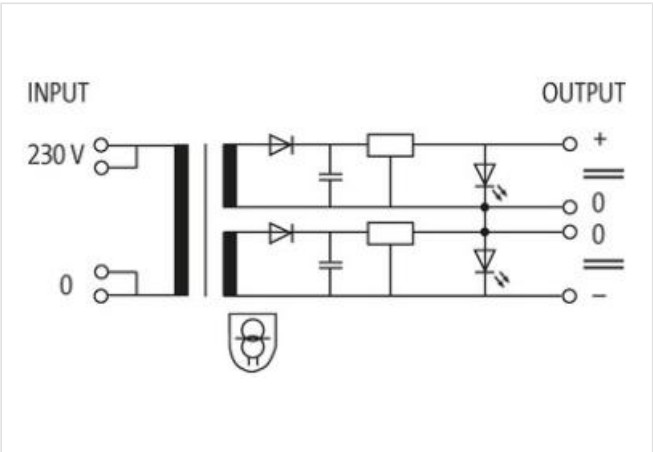

Product may differ from Image

General data	
Standards	EN 61558-2-6, EN 62041 category II, EN 55011 B, EN 61000-3-2
Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	0...+60 °C, no condensation
Output	
LED display	LED (green): in operation
Output suppression	LED, VDR and smoothing capacitor
Output current	max. 2x 50 mA
Ripple	max. 10 mV ss/pp
Unit protection	short-circuit and overload protected
Input	

Input voltage	207...253 V AC
---------------	----------------

Input fuse (external)	63 mA (T)
-----------------------	-----------

Input current	approx. 20 mA
---------------	---------------

Frequency	50...60 Hz
-----------	------------

Product article number of manufacturer	85616
--	-------