

MKN POWER SUPPLY 1-PHASE, LINEAR REGULATED

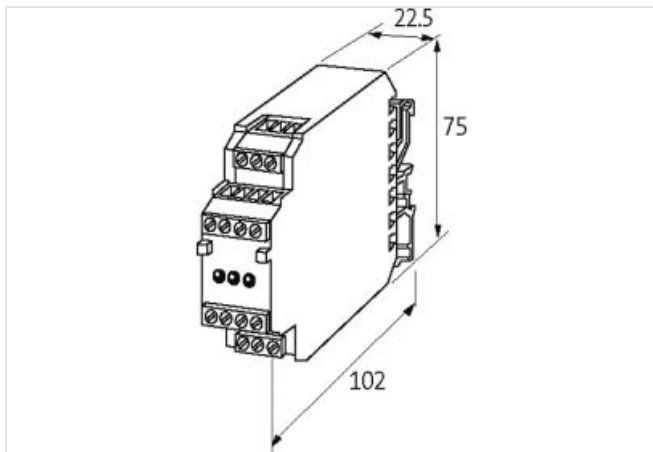
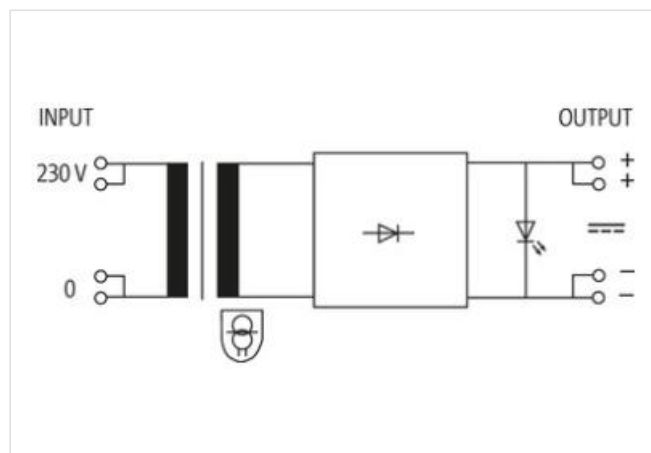
IN: 230VAC OUT: 10V/0,08ADC

INPUT: 230 V AC

OUTPUT: 10 V DC

Current: 80 mA

This power supply units meet the (EN 61000-3-2) standard for harmonic current.

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	0...+60 °C, no condensation

Output

LED display	LED (green): in operation
Output suppression	VDR and smoothing capacitor
Output current	max. 80 mA
Ripple	max. 10 mV ss/pp
Unit protection	short-circuit and overload protected

Input

Input voltage	207...253 V AC
---------------	----------------

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Input fuse (external)	63 mA (T)
Input current	approx. 20 mA
Frequency	50...60 Hz
Product article number of manufacturer	85615