



MEN POWER SUPPLY 1/2-PHASE, SMOOTHED

IN: 115/230+/-10VAC OUT: :24V/10ADC

Current: 10 A  
Output rating: 240 W  
This power supply units meet the (EN 61000-3-2) standard for harmonic current.  
For any mounting position at vertical wall.

Link to Product

Illustration

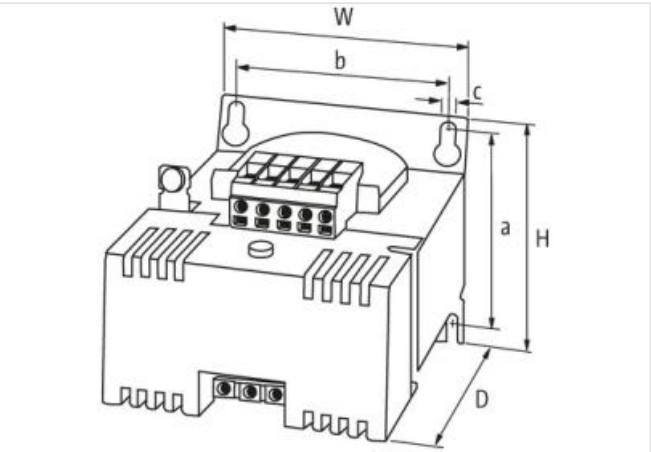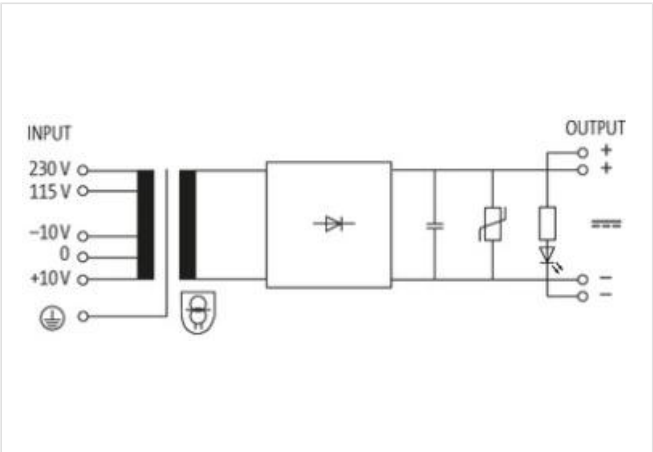

Product may differ from Image



General data	
Standards	EN 61558-2-6, EN 62041 category I, EN 55011 B, EN 61000-3-2
Mounting method	Key-hole mounting
Temperature range	-20...+60 °C, no condensation
Fixing centers a×b×c	94.5×90×5.8 mm
Dimensions H×W×D	112.5×120×160 mm
Output	

Output voltage	24 V DC (SELV)
Output current (Ta 60/40 °C)	max. 10 A (115 V AC); 12 A (230 V AC)
Output suppression	LED, VDR and smoothing capacitor
Output fuse	20 A (automotive fuse FKS)
Ripple	max. 5% eff/rms
<b>Input</b>	
Input voltage	115/230 V AC $\pm 10$ V AC
Input fuse (external)	5 A (T) (115 V AC); 2.5 A (T) (230 V AC)
Input current	3.7 A (115 V AC); 1.85 A (230 V AC)
Frequency	50...60 Hz
Product article number of manufacturer	85364