



MKN POWER SUPPLY 1-PHASE, LINEAR REGULATED

IN: 230VAC OUT: 2x15V/0,06ADC

INPUT: 230 V AC
OUTPUT: +-15 V DC
Current: 2× 35 mA
This power supply units meet the (EN 61000-3-2) standard for harmonic current.

Link to Product

Illustration

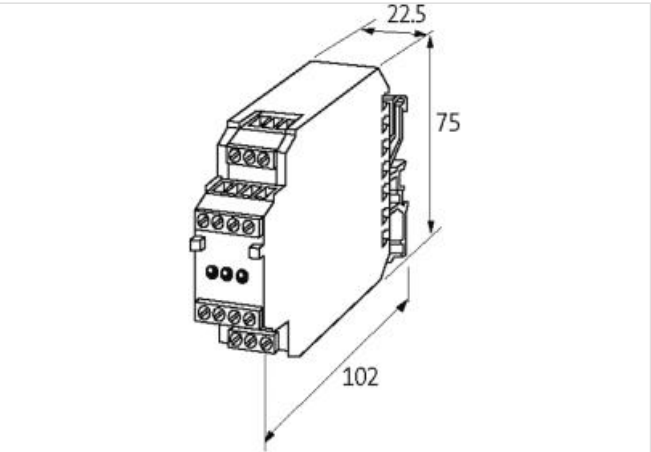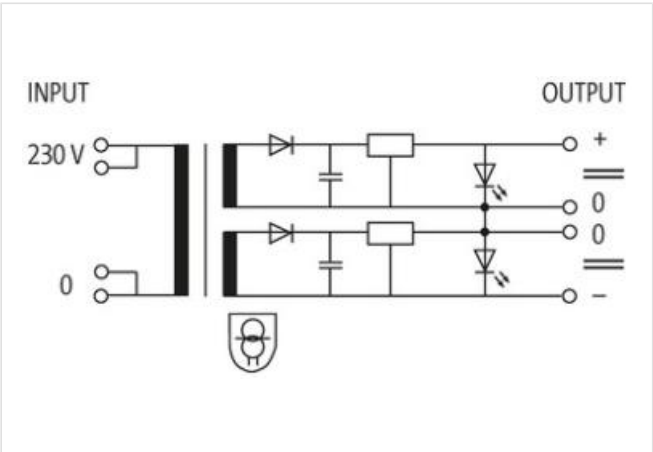

Product may differ from Image

General data	
Standards	EN 61558-2-6, EN 62041 category II, EN 55011 B, EN 61000-3-2
Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	0...+60 °C, no condensation
Output	
LED display	LED (green): in operation
Output suppression	LED, VDR and smoothing capacitor
Output current	max. 2× 35 mA
Ripple	max. 10 mV ss/pp
Unit protection	short-circuit and overload protected
Input	

Input fuse (external)	63 mA (T)
Input current	approx. 20 mA
Frequency	50...60 Hz
Product article number of manufacturer	85617