



NLS POWER SUPPLY 1/2-PHASE, LINEAR REGULATED

IN: 230/400VAC OUT: 24V/2ADC

Current: 2 A
Output rating: 48 W
This power supply units meet the (EN 61000-3-2) standard for harmonic current.

Link to Product

Illustration

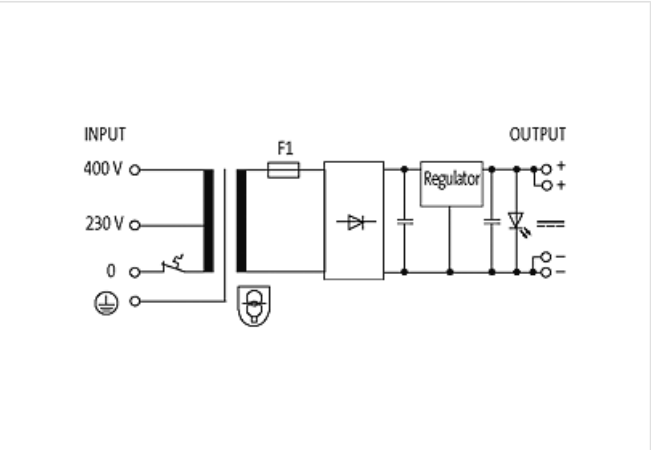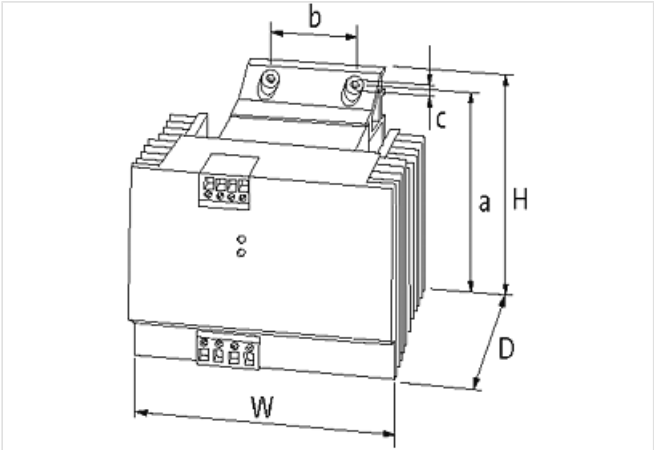

Product may differ from Image



| General data | |
|----------------------|---|
| Standards | EN 61558-2-6, EN 62041 category II, EN 55011 B, EN 61000-3-2 |
| Mounting method | DIN-rail mountable TH35 (EN 60715); key-hole mounting/screwable |
| Efficiency | 59% |
| Dimensions HxWxD | 110x128x135 mm |
| Fixing centers axbxc | 98x44x4.5 mm |
| Temperature range | 0...+60 °C, no condensation |

| Output | |
|-----------------------|---|
| Output voltage | 24 V DC (SELV), $\pm 2\%$ |
| Output current | 2 A (max. 6 A short-term) |
| Ripple | max. 2 mV |
| Unit protection | short-circuit and overload protected |
| Output fuse | 3.15 A (T), 5×20 mm |
| LED display | LED (green): in operation; LED (red): failure |
| Input | |
| Input voltage | 230/400 V AC |
| Input current | 0.54 A (230 V AC); 0.32 A (400 V AC) |
| Input fuse (external) | 1.0/0.6 A (T) |
| Frequency | 50...60 Hz |
| Safety | Thermal switch input side |