



NLS POWER SUPPLY 1/2-PHASE, LINEAR REGULATED

IN: 230/400VAC OUT: 24V/4ADC

Current: 4 A
Output rating: 96 W
This power supply units meet the (EN 61000-3-2) standard for harmonic current.

Link to Product

Illustration

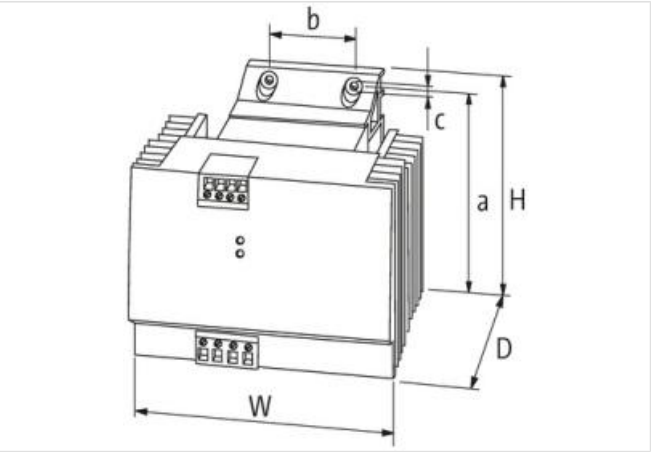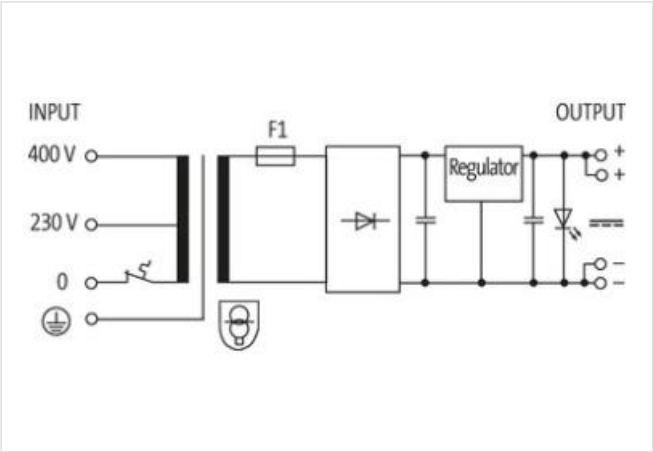

Product may differ from Image



General data	
Standards	EN 61558-2-6, EN 62041 category II, EN 55011 B, EN 61000-3-2
Mounting method	DIN-rail mountable TH35 (EN 60715); key-hole mounting/screwable
Temperature range	0...+60 °C, no condensation
Fixing centers a×b×c	98×80×4.5 mm
Efficiency	63%
Dimensions H×W×D	110×172×161 mm
Output	

Output voltage	24 V DC (SELV), $\pm 2\%$
LED display	LED (green): in operation; LED (red): failure
Output fuse	10 A (T) (5×20 mm internal)
Output current	4 A (max. 12 A short-term)
Ripple	max. 10 mV
Unit protection	short-circuit and overload protected
Input	
Input voltage	230/400 V AC
Input fuse (external)	1.6 AT (230 V AC); 1.0 AT (400 V AC)
Safety	Thermal switch input side
Input current	0.85 A (230 V AC); 0.49 A (400 V AC)
Frequency	50...60 Hz
Product article number of manufacturer	85637