



MKN POWER SUPPLY 1-PHASE, LINEAR REGULATED

IN: 230VAC OUT: 24V/0,07ADC

INPUT: 230 V AC
OUTPUT: 24 V DC
Current: 70 mA
This power supply units meet the (EN 61000-3-2) standard for harmonic current.

[Link to Product](#)

Illustration

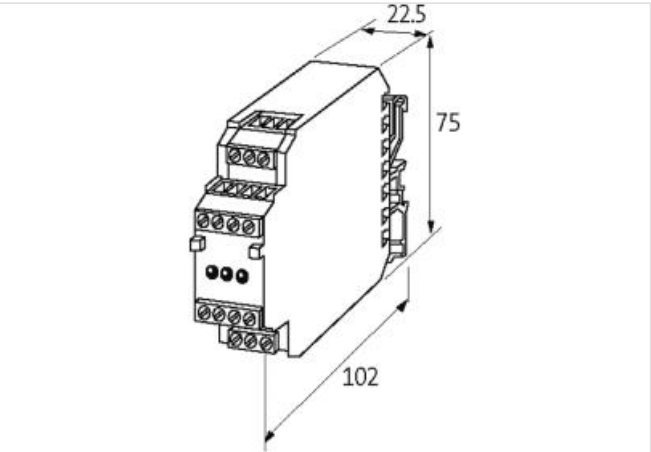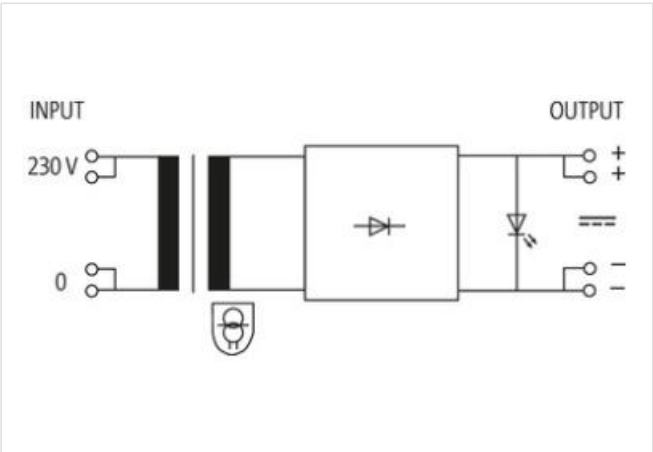

Product may differ from Image

General data	
Standards	EN 61558-2-6, EN 62041 category II, EN 55011 B, EN 61000-3-2
Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	0...+60 °C, no condensation
Output	
LED display	LED (green): in operation
Output suppression	VDR and smoothing capacitor
Output current	max. 70 mA
Ripple	max. 10 mV ss/pp
Unit protection	short-circuit and overload protected
Input	

Input voltage	207...253 V AC
Input fuse (external)	63 mA (T)
Input current	approx. 10 mA
Frequency	50...60 Hz
Product article number of manufacturer	85610