



MEN POWER SUPPLY 1/2-PHASE, SMOOTHED

IN: 115/230+/-10VAC OUT: :24V/1ADC

Current: 1 A  
Output rating: 24 W

[Link to Product](#)

Illustration

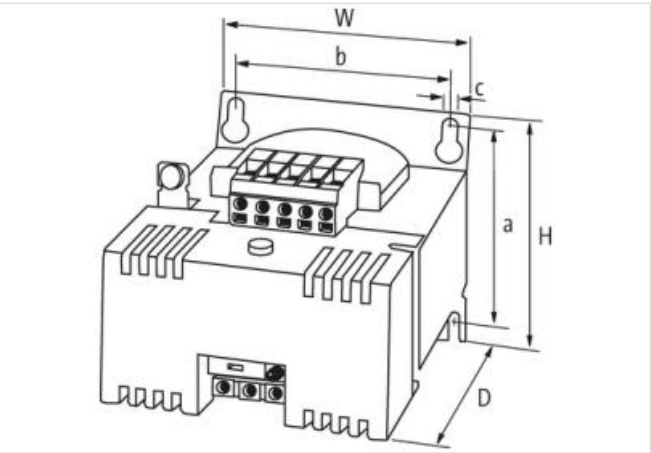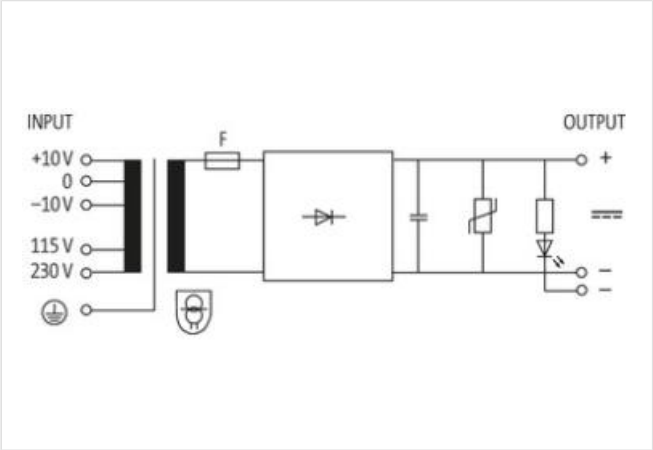

Product may differ from Image



General data	
Standards	EN 61558-2-6, EN 62041 category I, EN 55011 B, EN 61000-3-2
Mounting method	Key-hole mounting
Temperature range	-20...+60 °C, no condensation
Fixing centers a×b×c	47.5×56×4.8 mm
Dimensions H×W×D	64×78×120 mm
Output	
Output voltage	24 V DC (SELV)

Output current (Ta 60/40 °C)	max. 1 A (115 V AC); 1.5 A (230 V AC)
------------------------------	---------------------------------------

Output suppression	LED, VDR and smoothing capacitor
--------------------	----------------------------------

Output fuse	3 A (automotive fuse FKS)
-------------	---------------------------

Ripple	max. 5% eff/rms
--------	-----------------

**Input**

Input voltage	115/230 V AC $\pm 10$ V AC
---------------	----------------------------

Input fuse (external)	0.8 A (T) (115 V AC); 0.4 A (T) (230 V AC)
-----------------------	--

Input current	0.54 A (115 V AC); 0.27 A (230 V AC)
---------------	--------------------------------------

Frequency	50...60 Hz
-----------	------------

Product article number of manufacturer	85360
--	-------