


MST 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 5000VA IN: 208...550VAC OUT: 2x115VAC

Single-phase - Control and Isolation Transformers
5000 VA
Isolation class T 40/B
Other voltages on request.

Link to Product

Illustration

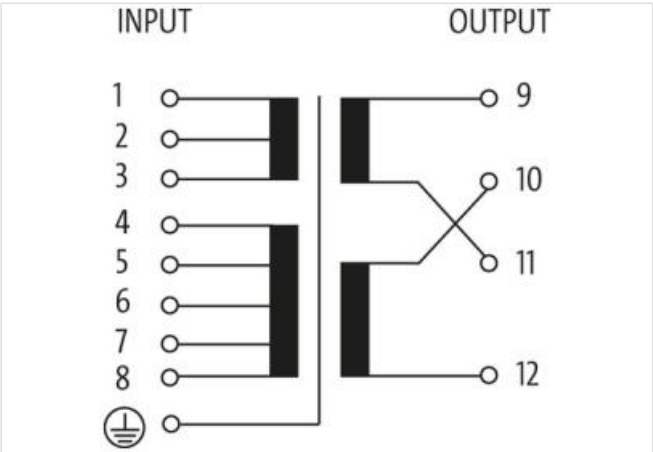

Product may differ from Image



| General data | |
|------------------------|---|
| Standards | EN 61558-2-4, EN 62041 category 0 |
| Mounting method | 4 hole screw mounting |
| Temperature range | -20...+40 °C (storage temperature -40...+80 °C) |
| Test isolation voltage | 5.1 kV (prim./sec.) |
| Drill hole Ø | 9x14 mm |
| Fixing centers a×b×c | 200×174×9 mm |

Dimensions H×W×D 248×197×250 mm

Output

Output voltage 1× 230, 1× 115, 2× 115 V AC

Output rating 5000 VA

Input

Input voltage 208, 230, 380, 400, 420, 440, 460, 480, 500, 525, 550 V AC

Inrush current 378 A (208 V AC); 143 A (550 V AC)

Short-circuit current 1362 A (208 V AC); 515 A (550 V AC)

Input current 25.4 A (208 V AC); 9.6 A (550 V AC)

Frequency 50...60 Hz

Product article number of manufacturer 86157