

MKN POWER SUPPLY 1-PHASE, LINEAR REGULATED

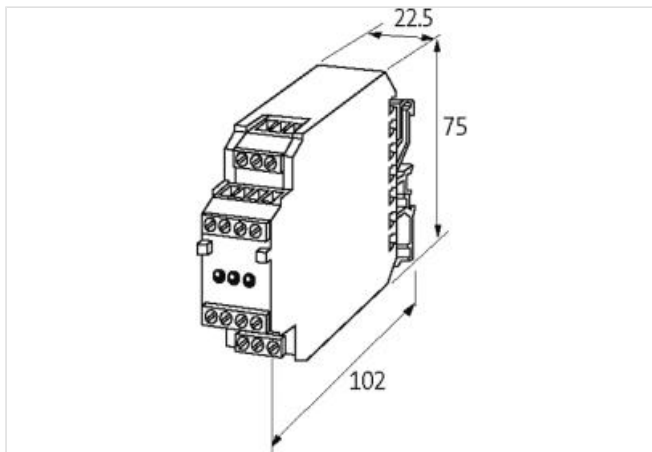
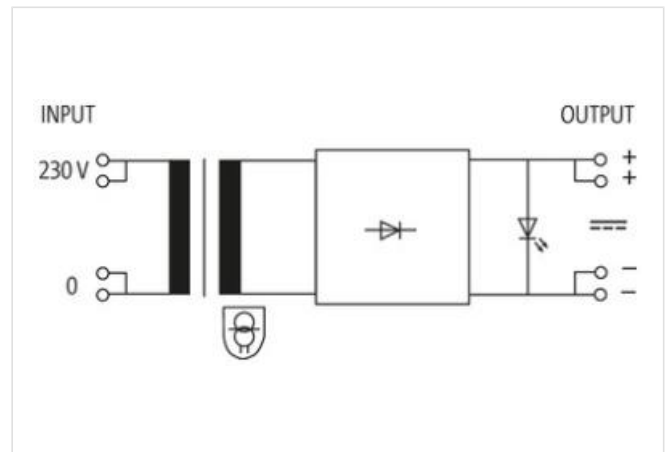
IN: 230VAC OUT: 9,5-15V/0,1ADC

INPUT: 230 V AC

OUTPUT: 9.5...15 V DC

Current: 100 mA

This power supply units meet the (EN 61000-3-2) standard for harmonic current.

[Link to Product](#)
Illustration


Product may differ from Image

General data

Standards	EN 61558-2-6, EN 62041 category II, EN 55011 B, EN 61000-3-2
Mounting method	DIN-rail mountable TH35 or G32 (EN 60715)
Temperature range	0...+60 °C, no condensation

Output

LED display	LED (green): in operation
Output suppression	VDR and smoothing capacitor
Output current	max. 100 mA
Ripple	max. 10 mV ss/pp
Unit protection	short-circuit and overload protected

Input

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 2022-11-13

Murrelektronik Inc. | 1327 Northbrook Parkway, Suite 460 | Suwanee, GA 30024 | Fon +1 770 497-9292 | Fax +1 770 497-9391 | shop@murrinc.com | shop.murrinc.com

Input voltage	207...253 V AC
Input fuse (external)	63 mA (T)
Input current	approx. 30 mA
Frequency	50...60 Hz
Product article number of manufacturer	85625