

Non-Metallic Low-Profile Strain Relief Cord Connectors

Non-metallic. Liquid-tight. Oil-tight. Furnished with sealing ring and locknut.

Arlington's Low Profile Cord Connector has a unique grommet with gripping fingers. These connectors have the largest cord range in the industry, so there are fewer items to stock. A liquid-tight seal and superior pullout resistance is accomplished by just tightening the nut. A sealing ring is furnished to assure a liquid-tight seal when installing in non-threaded openings.



LPCG50



LPCG757

WHITE SEALING
RING MATCHES
PRODUCT



LPCG50W

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	TRADE SIZE	CORD RANGE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
LPCG503*	50350	1/2	.100 - .360	25	100	1.792	.595	.978
LPCG50*	80086	1/2	.200 - .485	25	100	1.792	.595	.978
LPCG507	50354	1/2	.385 - .600	25	100	2.250	.595	1.230
LPCG753*	50760	3/4	.100 - .360	10	50	1.963	.595	.978
LPCG754	50762	3/4	.200 - .485	10	50	1.963	.595	.978
LPCG757	36100	3/4	Grommet A - .385 to .600 Grommet B - .600 to .750	10	50	2.250	.595	1.230

*UL not applicable for cords under .200" diameter. Wire strength will not meet UL 35 lb test requirements for the fitting.


When ordering black, add suffix "BL" to catalog number.

When ordering white, add suffix "W" to catalog number.

PATENTED.



Scan for Video

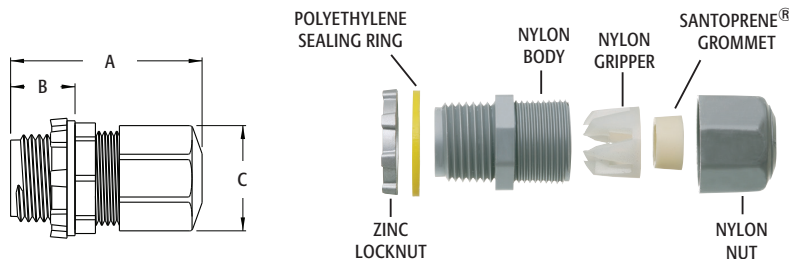

Zinc Die-Cast Low-Profile Strain Relief Cord Connectors

Zinc die-cast. Liquid-tight. Oil-tight. Furnished with sealing ring and locknut.



LPCG50Z



LPCG757Z

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	TRADE SIZE	CORD RANGE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
LPCG503Z*	50352	1/2	.100 - .360	25	100	1.792	.595	.978
LPCG50Z*	36110	1/2	.200 - .485	25	100	1.792	.595	.978
LPCG507Z	50356	1/2	.385 - .600	25	100	2.250	.595	1.230
LPCG753Z*	36105	3/4	.100 - .360	10	50	1.963	.595	.978
LPCG754Z	50764	3/4	.200 - .485	10	50	1.963	.595	.978
LPCG757Z	50766	3/4	Grommet A - .385 to .600 Grommet B - .600 to .750	10	50	2.250	.595	1.230

*UL not applicable for cords under .200" diameter. Wire strength will not meet UL 35 lb test requirements for the fitting.

PATENTED.



Scan for Video

