



DIMENSIONS:	
A	3.750" ±0.063
B	3.935" ±0.125
C	4.530" ±0.063
D	3.000" ±0.063
E	2.813" ±0.063
G	0.203" x 0.375" ±0.015

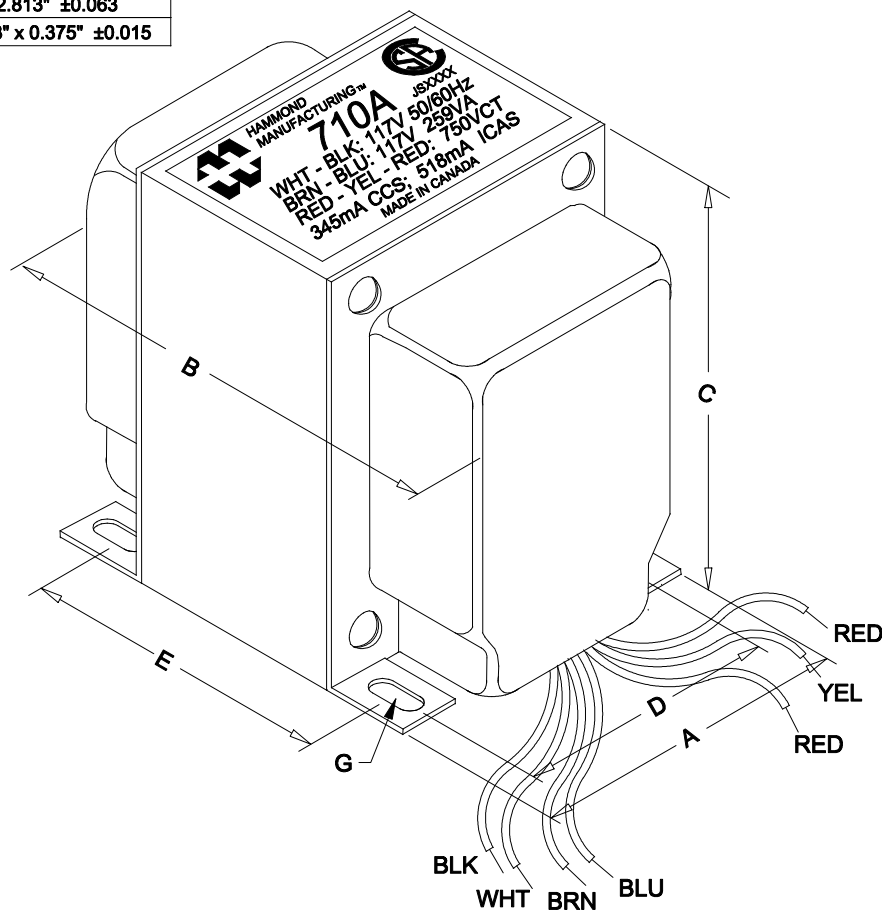

NOTE: ALL LEADS 9" OUT MIN.

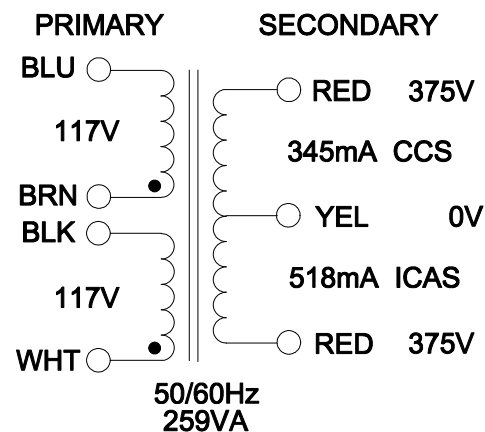

FOR 117V: CONNECT WHT & BRN TOGETHER AND BLK & BLU TOGETHER
 INPUT: WHT - BLK
 FOR 234V: CONNECT BLK & BRN TOGETHER
 INPUT: WHT - BLU

ELECTRICAL DATA:			
TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 117V, 60Hz, WHT - BLK	206mA	Max.
Sec. N.L.V	@ 117V, 60Hz, WHT - BLK		
	BRN - BLU =	117.0V	±2%
	RED - RED =	792.1V	±2%
	RED - RED/YEL = RED/YEL - RED =	396.1V	±2%
DCR	@ 20°C, WHT - BLK =	2.248 Ω	±20%
	@ 20°C, BRN - BLU =	2.757 Ω	±20%
	@ 20°C, RED - RED =	54.82 Ω	±20%
HIPOT	PRIMARY - SECONDARY	3000V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	C.I. 07/27/18	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181 FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: PLATE TRANSFORMER	DWG. NO. 710A
			DATE: 07/27/18	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		