

250 V NON/600 V NOS Class K5 and H fuses



Description

Basic protection 250V NON Class K5 and H general purpose, non-current-limiting, one-time fuses.

Catalog symbol

- NON-(amp)

Ratings

- Volts
 - 250 Vac
 - 125 Vdc (1/8-100 A)
- Amps 1/8-600 A
- IR
 - 50 kA Vac RMS Sym. (1/8-60 A)
 - 10 kA Vac RMS Sym. (65-600 A)
 - 50 kA Vdc (1/8-60 A)
 - 10 kA Vdc (65-100 A)

Agency information

- UL Listed, Class K5 (1/8-60 A), Std. 248-9, Class H (65-600 A), Std. 248-6 (125 Vdc 1/8-100 A), UL Guide JDDZ, File E4273
- CSA Certified, Class 1421-01, File 53787 (1/8-12 A, 65-600 A)†
- CE

† For CSA Certified 15-60 A, see PON data sheet no. 4126.

Catalog numbers (amps)


NON-1/8	NON-3	NON-12	NON-65	NON-200
NON-1/2	NON-3-2/10	NON-15	NON-70	NON-225
NON-3/4	NON-4	NON-20	NON-75	NON-250
NON-8/10	NON-5	NON-25	NON-80	NON-300
NON-1	NON-6	NON-30	NON-90	NON-350
NON-1-1/4	NON-6-1/4	NON-35	NON-100	NON-400
NON-1-1/2	NON-7	NON-40	NON-110	NON-450
NON-1-6/10	NON-8	NON-45	NON-125	NON-500
NON-2	NON-9	NON-50	NON-150	NON-600
NON-2-1/2	NON-10	NON-60	NON-175	

Carton quantity

Amps	Qty.
1/8-60	10
65-100	5
110-600	1

Dimensions – in

All Diameters ± 0.008

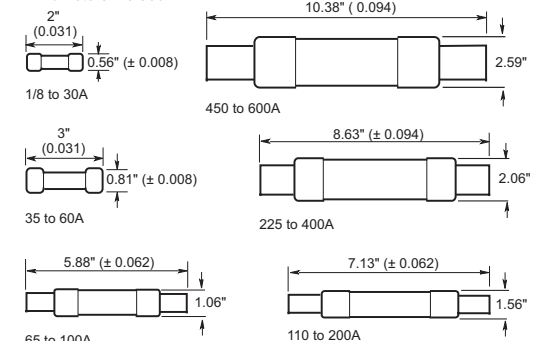

Features

- Protect lighting, heating and other circuits not subject to temporary surges and where available short-circuit currents are relatively low
- NON one-time fuses do not have any appreciable degree of timedelay and thus should not be specified in circuits where large transients or motor overloads occur. Use Bussmann series advanced protection FUSETRON™ FRN-R or ultimate protection Low-Peak™ LPN-RK dual-element, time-delay fuses.
- For general purpose circuits, size at amp rating of circuit
- For motor circuits, size at 300% to 400% according to the NEC® motor ampacity tables 430.247 to 430.250, per 430.6(A)(1)

Recommended fuse blocks

- 1-, 2- and 3-pole modular fuse blocks up to 600 amps — see data sheet no. 10487
- 1-, 2- and 3-pole modular power distribution fuse blocks up to 60 amps — see data sheet no. 10490

Fuse reducers for Class R fuses

Equipment fuse clips	Desired fuse (case) size	Catalog no. (pairs) 250V
60 A	30 A	NO.263
100 A	30 A	NO.213
	60 A	NO.216
200 A	60 A	NO.226
	100 A	NO.2621
400 A	100 A	NO.2641†
	200 A	NO.2642
	100 A	NO.2661†
600 A	200 A	NO.2662†
	400 A	NO.2664†

† Not CSA certified.
For additional information on Class K5 & H fuse reducers, see data sheet no. 1118.

NON time-current curves — average melt

