


Industrial grade 50A locking devices

Product description

2-pole, 3-wire grounding
50A, 125V/AC
Non-NEMA, marine grade



Marine grade plugs & connectors



Rating A	V/AC	Description	Cord diameter	Color	Plug catalog no.	Connector catalog no.		
50	125	Pro grip nylon	0.44-1.06" (11.1-26.0mm)	Y & BK	□ 63CR61EX	□ 63CR60EX	•	•
		Armored	0.68-1.13" (17.3-28.6mm)	Stainless steel	□ 63CR61		•	•
		Armored	0.68-1.13" (17.3-28.6mm)	Stainless steel		□ 63CR60	•	

Marine grade receptacles



Rating A	V/AC	Description	Color	Single receptacle		
50	125	Corrosion resistant	BK	□ 63CR70	•	•

Accessories for 50A marine grade locking devices

Description	Color suffix	Catalog no.		
Weather protective glass-filled nylon, w/ lift lid cover	BK, CR, GY	□ 7788__	•	•
Weather protective diecast aluminum, w/ lift lid cover		□ 7770	•	
Weather protective boot for 50A armored plug		□ 7716	•	
Weather protective boot for 50A armored connector		□ 7717	•	
Weather protective boot for 50A pro grip plug		□ 7716EX	•	
Weather protective boot for 50A pro grip connector		□ 7717EX	•	
For 50A armored connector when used w/ hull inlet (NOT California standard)		□ 77CR15	•	



7788CR
Corrosion
resistant



7770



7716



7717



7716EX



7717EX



77CR15

Dimensional information:

C-80, C-81

Plug & connector specification information:

50A: C-91

Receptacle specification information:

50A marine: C-91

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: BK (Black), GY (Gray), Y or CR (Yellow)

BK	GY	Y or CR	
(Black)	(Gray)	(Yellow)	(Stainless Steel)

Compliances, specifications and availability are subject to change without notice.

Indicates NAFTA compliant - Page Q-32

RoHS compliant - Page Q-32

Industrial grade 50A locking devices

Product description

2-pole, 3-wire grounding
50A, 125V/AC
Non-NEMA, California standard



Receptacle



Plug



CS6361EX



CS6360EX

California standard plugs & connectors

Rating A	V/AC	Description	Cord diameter	Color	Plug catalog no.	Connector catalog no.		
50	125	Pro grip nylon California standard	0.44-1.06" (11.1-26.0mm)	RD & BK	☐ CS6361EX	☐ CS6360EX	•	•
		Armored California standard	0.68-1.13" (17.3-28.6mm)	Stainless steel	☐ CS6361	☐ CS6360	•	•

California standard grade receptacles

Rating A	V/AC	Description	Color	Single receptacle		
50	125	California standard receptacles	BK	☐ CS6370	•	•

California standard flanged inlets

Rating A	V/AC	Description	Color	Flanged inlet	Flanged inlet w/ lid		
50	125	California standard flanged inlets	Stainless steel	☐ CS6377	☐ CS6378	•	•

Accessories for 50A California standard locking devices

Description	Color suffix	Catalog no.		
Weather protective glass-filled nylon, w/ lift lid cover	BK, CR, GY	☐ 7788__	•	•
Weather protective diecast aluminum, w/ lift lid cover		☐ 7770	•	
Weather protective boot for 50A armored plug		☐ 7716	•	
Weather protective boot for 50A armored connector		☐ 7717	•	
Weather protective boot for 50A pro grip plug		☐ 7716EX	•	
Weather protective boot for 50A pro grip connector		☐ 7717EX	•	



7788CR
Corrosion
resistant



7770



7716



7717



7716EX



7717EX

Dimensional information:
C-80, C-81

Plug & connector specification information:
50A: C-92

Receptacle specification information:
50A: C-92

Flanged inlet & flanged outlet specification information:
50A: C-92

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: BK (Black), GY (Gray), RD (Red), Y or CR (Yellow)

(Black)	(Gray)	(Red)	(Yellow)	(Stainless Steel)

Compliances, specifications and availability are subject to change without notice.


Indicates NAFTA compliant - Page Q-32

RoHS compliant - Page Q-32

Industrial grade 50A locking devices

Product description

2-pole, 3-wire grounding
50A, 250V/AC
Non-NEMA, California standard




Receptacle

Plug



CS8265



CS8277

California standard plugs & connectors

Rating A	V/AC	Description	Cord diameter	Color	Plug catalog no.	Connector catalog no.		
50	250	Pro grip nylon California standard	0.44-1.06" (11.1-26.0mm)	RD & BK	☐ CS8265EX	☐ CS8264EX	•	•
		Armored California standard	0.68-1.13" (17.3-28.6mm)	Steel	☐ CS8265	☐ CS8264	•	•

California standard grade receptacles

Rating A	V/AC	Description	Color	Single receptacle		
50	250	California standard receptacles	BK	☐ CS8269	•	•

California standard flanged inlets

Rating A	V/AC	Description	Color	Flanged inlet	Flanged inlet w/ lid		
50	250	California standard flanged inlets	Steel	☐ CS8275	☐ CS8277	•	•

Accessories for 50A California standard locking devices

Description	Color suffix	Catalog no.		
Weather protective glass-filled nylon, w/ lift lid cover	BK, CR, GY	☐ 7788__	•	•
Weather protective diecast aluminum, w/ lift lid cover		☐ 7770	•	
Weather protective boot for 50A armored plug		☐ 7716	•	
Weather protective boot for 50A armored connector		☐ 7717	•	
Weather protective boot for 50A pro grip plug		☐ 7716EX	•	
Weather protective boot for 50A pro grip connector		☐ 7717EX	•	



7788CR
Corrosion
resistant



7770



7716



7717



7716EX



7717EX

Dimensional information:

C-80, C-81

Plug & connector specification information:

50A: C-92

Receptacle specification information:

50A: C-92

Flanged inlet & flanged outlet specification information:

50A: C-92

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: BK (Black), GY (Gray), RD (Red), Y or CR (Yellow)

(Black)	(Gray)	(Red)	(Yellow)	(Steel)

Compliances, specifications and availability are subject to change without notice.


Indicates NAFTA compliant - Page Q-32

RoHS compliant - Page Q-32

Industrial grade 50A locking devices

Product description

2-pole, 3-wire grounding
50A, 250V/DC / 600V/AC
Non-NEMA




Receptacle


Plug



3763



3771



3767

Industrial grade plugs & connectors

A	Rating V/DC V/AC	Description	Cord diameter	Color	Plug catalog no.	Connector catalog no.		
50	250 600	Pro grip nylon	0.44-1.06" (11.1-26.0mm)	RD & BK	□ 3763EX	□ 3762EX	•	•
		Armored	0.68-1.13" (17.3-28.6mm)	Steel		□ 3762	•	•
		Armored	0.68-1.13" (17.3-28.6mm)	Steel	□ 3763		•	

Industrial grade receptacles

A	Rating V/DC V/AC	Description	Color	Single receptacle		
50	250 600	Industrial receptacles	BK	□ 3771	•	•

Industrial grade flanged inlets

A	Rating V/DC V/AC	Description	Color	Flanged inlet	Flanged inlet w/ lid		
50	250 600	Industrial flanged inlets	Steel	□ 3777	□ 3767	•	•

Accessories for 50A industrial grade locking devices

Description	Color suffix	Catalog no.		
Weather protective glass-filled nylon, w/ lift lid cover	BK, CR, GY	□ 7788__	•	•
Weather protective diecast aluminum, w/ lift lid cover		□ 7770	•	
Weather protective boot for 50A armored plug		□ 7716	•	
Weather protective boot for 50A armored connector		□ 7717	•	
Weather protective boot for 50A pro grip plug		□ 7716EX	•	
Weather protective boot for 50A pro grip connector		□ 7717EX	•	



7788CR
Corrosion
resistant



7770



7716



7717



7716EX



7717EX

Dimensional information:
C-80, C-81

Plug & connector specification information:
50A: C-92

Receptacle specification information:
50A: C-92

Flanged inlet & flanged outlet specification information:
50A: C-92

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: BK (Black), GY (Gray), RD (Red), Y or CR (Yellow)

				
(Black)	(Gray)	(Red)	(Yellow)	(Steel)

Compliances, specifications and availability are subject to change without notice.

 Indicates NAFTA compliant - Page Q-32

 RoHS compliant - Page Q-32

Industrial grade 50A locking devices

Product description


2-pole, 3-wire grounding
50A, 480V/AC
Non-NEMA, California standard




Receptacle



Plug



CS8464



CS8469

California standard plugs & connectors



Rating A	V/AC	Description	Cord diameter	Color	Plug catalog no.	Connector catalog no.		
50	480	Pro grip nylon	0.44-1.06" (11.1-26.0mm)	RD & BK	□ CS8465EX	□ CS8464EX	•	•
		Armored	0.68-1.13" (17.3-28.6mm)	Steel	□ CS8465	□ CS8464	•	•

California standard grade receptacles



Rating A	V/AC	Description	Color	Single receptacle		
50	480	California standard receptacles	BK	□ CS8469	•	•

California standard flanged inlets



Rating A	V/AC	Description	Color	Flanged inlet	Flanged inlet w/ lid		
50	480	California standard flanged inlets	Steel	□ CS8475	□ CS8477	•	•

Accessories for 50A California standard locking devices

Description	Color suffix	Catalog no.		
Weather protective glass-filled nylon, w/ lift lid cover	BK, CR, GY	□ 7788__	•	•
Weather protective diecast aluminum, w/ lift lid cover		□ 7770	•	
Weather protective boot for 50A armored plug		□ 7716	•	
Weather protective boot for 50A armored connector		□ 7717	•	
Weather protective boot for 50A pro grip plug		□ 7716EX	•	
Weather protective boot for 50A pro grip connector		□ 7717EX	•	



7788CR
Corrosion
resistant



7770



7716



7717



7716EX



7717EX

Dimensional information:
C-80, C-81

Plug & connector specification information:
50A: C-92

Receptacle specification information:
50A: C-92

Flanged inlet & flanged outlet specification information:
50A: C-92

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: BK (Black), GY (Gray), RD (Red), Y or CR (Yellow)

BK	GY	RD	Y or CR	
(Black)	(Gray)	(Red)	(Yellow)	(Steel)

Compliances, specifications and availability are subject to change without notice.



Indicates NAFTA compliant - Page Q-32




RoHS compliant - Page Q-32

Industrial grade 50A locking devices

Product description

3-pole, 4-wire grounding
50A, 125/250V/AC
Non-NEMA, marine grade




Receptacle

Plug



63CR64



63CR69

Marine grade plugs & connectors

Rating A	V/AC	Description	Cord diameter	Color	Plug catalog no.	Connector catalog no.		
50	125/250	Pro grip nylon	0.44-1.06" (11.1-26.0mm)	Y & BK	□ 63CR65EX	□ 63CR64EX	•	•
		Armored	0.68-1.13" (17.3-28.6mm)	Stainless steel	□ 63CR65	□ 63CR64	•	•

Marine grade receptacles

Rating A	V/AC	Description	Color	Single receptacle	
50	125/250	Corrosion resistant	BK	□ 63CR69	•

Accessories for 50A marine grade locking devices

Description	Color suffix	Catalog no.		
Weather protective glass-filled nylon, w/ lift lid cover	BK, CR, GY	□ 7788__	•	•
Weather protective diecast aluminum, w/ lift lid cover		□ 7770	•	
Weather protective boot for 50A armored plug		□ 7716	•	
Weather protective boot for 50A armored connector		□ 7717	•	
Weather protective boot for 50A pro grip plug		□ 7716EX	•	
Weather protective boot for 50A pro grip connector		□ 7717EX	•	
For 50A armored connector when used w/ hull inlet (NOT California standard)		□ 77CR15	•	



7788CR
Corrosion
resistant



7770



7716



7717



7716EX



7717EX



77CR15

Dimensional information: C-80, C-81

Plug & connector specification information:

50A: C-91

Receptacle specification information:

50A marine: C-91

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: BK (Black), GY (Gray), Y or CR (Yellow)

(Black)	(Gray)	(Yellow)	(Stainless Steel)

Compliances, specifications and availability are subject to change without notice.


Indicates NAFTA compliant - Page Q-32

RoHS compliant - Page Q-32

Industrial grade 50A locking devices

Product description


3-pole, 4-wire grounding
50A, 125/250V/AC
Non-NEMA, California standard



CS6365EX



CS6364EX



CS6376

California standard plugs & connectors



Rating A	V/AC	Description	Cord diameter	Color	Plug catalog no.	Connector catalog no.		
50	125/250	Pro grip nylon	0.44-1.06" (11.1-26.0mm)	RD & BK	□ CS6365EX	□ CS6364EX	•	•
		Armored	0.68-1.13" (17.3-28.6mm)	Steel	□ CS6365		•	•
		Armored	0.68-1.13" (17.3-28.6mm)	Steel		□ CS6364	•	•

California standard grade receptacles



Rating A	V/AC	Description	Color	Single receptacle		
50	125/250	California standard receptacles	BK	□ CS6369	•	•

California standard flanged inlets



Rating A	V/AC	Description	Color	Flanged inlet	Flanged inlet w/ lid		
50	125/250	California standard flanged inlets	Steel	□ CS6375	□ CS6376	•	•

Accessories for 50A California standard locking devices

Description	Color suffix	Catalog no.		
Weather protective glass-filled nylon, w/ lift lid cover	BK, CR, GY	□ 7788__	•	•
Weather protective diecast aluminum, w/ lift lid cover		□ 7770	•	
Weather protective boot for 50A armored plug		□ 7716	•	
Weather protective boot for 50A armored connector		□ 7717	•	
Weather protective boot for 50A pro grip plug		□ 7716EX	•	
Weather protective boot for 50A pro grip connector		□ 7717EX	•	



7788CR
Corrosion
resistant



7770



7716



7717



7716EX



7717EX

Dimensional information:
C-80, C-81

Plug & connector specification information:
50A: C-92

Receptacle specification information:
50A: C-92

Flanged inlet & flanged outlet specification information:
50A: C-92

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: BK (Black), GY (Gray), RD (Red), Y or CR (Yellow)

BK	GY	RD	Y or CR	
(Black)	(Gray)	(Red)	(Yellow)	(Steel)

Compliances, specifications and availability are subject to change without notice.


Indicates NAFTA compliant - Page Q-32

RoHS compliant - Page Q-32

Industrial grade 50A locking devices

Product description

3-pole, 4-wire grounding
50A, 3Ø 250V/AC
Non-NEMA, California standard



Receptacle

Plug



CS8364



CS8369

California standard plugs & connectors

Rating A	V/AC	Description	Cord diameter	Color	Plug catalog no.	Connector catalog no.		
50	250	3Ø pro grip nylon	0.44-1.06" (11.1-26.0mm)	RD & BK	□ CS8365EX	□ CS8364EX	•	•
		3Ø armored	0.68-1.13" (17.3-28.6mm)	Steel	□ CS8365	□ CS8364	•	•

California standard grade receptacles

Rating A	V/AC	Description	Color	Single receptacle	
50	250	3Ø California standard receptacles	BK	□ CS8369	•

California standard flanged inlets

Rating A	V/AC	Description	Color	Flanged inlet	Flanged inlet w/ lid	
50	250	3Ø California standard flanged inlets	Steel	□ CS8375	□ CS8377	•

Accessories for 50A California standard locking devices

Description	Color suffix	Catalog no.		
Weather protective glass-filled nylon, w/ lift lid cover	BK, CR, GY	□ 7788__	•	•
Weather protective diecast aluminum, w/ lift lid cover		□ 7770	•	
Weather protective boot for 50A armored plug		□ 7716	•	
Weather protective boot for 50A armored connector		□ 7717	•	
Weather protective boot for 50A pro grip plug		□ 7716EX	•	
Weather protective boot for 50A pro grip connector		□ 7717EX	•	



7788CR
Corrosion
resistant



7770



7716



7717



7716EX



7717EX

Dimensional information:
C-80, C-81

Plug & connector specification information:
50A: C-92

Receptacle specification information:
50A: C-92

Flanged inlet & flanged outlet specification information:
50A: C-92

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: BK (Black), GY (Gray), RD (Red), Y or CR (Yellow)

				
(Black)	(Gray)	(Red)	(Yellow)	(Steel)

Compliances, specifications and availability are subject to change without notice.


 Indicates NAFTA compliant - Page Q-32

 RoHS compliant - Page Q-32

Industrial grade 50A locking devices

Product description

3-pole, 4-wire grounding
50A, 250V/DC / 600V/AC
Non-NEMA



Receptacle

Plug

Industrial grade plugs & connectors

A	Rating V/DC	V/AC	Description	Cord diameter	Color	Plug catalog no.	Connector catalog no.		
50	250	600	Pro grip nylon	0.44-1.06" (11.1-26.0mm)	RD & BK	□ 3765EX	□ 3764EX	•	•
			Armored	0.68-1.13" (17.3-28.6mm)	Steel	□ 3765	□ 3764	•	•

Industrial grade receptacles

A	Rating V/DC	V/AC	Description	Color	Single receptacle		
50	250	600	Receptacles	BK	□ 3769	•	•

Industrial grade flanged inlets

A	Rating V/DC	V/AC	Description	Color	Flanged inlet		Flanged inlet w/ lid		
50	250	600	Flanged inlets	Steel	□ 3775	•	□ 3768	•	•

Accessories for 50A industrial grade locking devices


Description	Color suffix	Catalog no.		
Weather protective glass-filled nylon, w/ lift lid cover	BK, CR, GY	□ 7788__	•	•
Weather protective diecast aluminum, w/ lift lid cover		□ 7770	•	
Weather protective boot for 50A armored plug		□ 7716	•	
Weather protective boot for 50A armored connector		□ 7717	•	
Weather protective boot for 50A pro grip plug		□ 7716EX	•	
Weather protective boot for 50A pro grip connector		□ 7717EX	•	




3765



3764



3769



3768

7788CR
Corrosion
resistant

7770



7716



7717



7716EX



7717EX

Dimensional information:
C-80, C-81

Plug & connector specification information:
50A: C-92

Receptacle specification information:
50A: C-92

Flanged inlet & flanged outlet specification information:
50A: C-92

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: BK (Black), GY (Gray), RD (Red), Y or CR (Yellow)

				
(Black)	(Gray)	(Red)	(Yellow)	(Steel)

Compliances, specifications and availability are subject to change without notice.



 Indicates NAFTA compliant - Page Q-32

 RoHS compliant - Page Q-32

Industrial grade 50A locking devices

Product description

3-pole, 4-wire grounding
50A, 250V/DC / 600V/AC
Non-NEMA

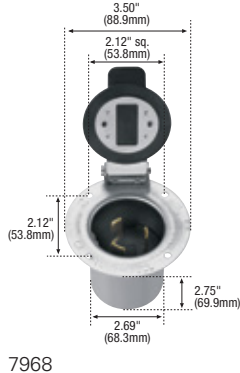

Industrial grade plugs & connectors

A	Rating V/DC	V/AC	Description	Cord diameter	Color	Plug catalog no.	Connector catalog no.		
50	250	600	Pro grip nylon	0.44-1.06" (11.1-26.0mm)	RD & BK	□ 7765EX*	□ 7764EX*	•	•
			Armored	0.68-1.13" (17.3-28.6mm)	Steel	□ 7765*	□ 7764*	•	•

*For replacement use in existing installations only

Industrial grade receptacles

A	Rating V/DC	V/AC	Description	Color	Single receptacle	
50	250	600	Receptacles	BK	□ 7379*	•

*For replacement use in existing installations only

Industrial grade flanged inlets

A	Rating V/DC	V/AC	Description	Color	Flanged inlet	Flanged inlet w/ lid		
50	250	600	Flanged inlets	Steel	□ 7958*	□ 7968*	•	•

*For replacement use in existing installations only

Accessories for 50A industrial grade locking devices

Description	Color suffix	Catalog no.		
Weather protective glass-filled nylon, w/ lift lid cover	BK, CR, GY	□ 7788__	•	•
Weather protective diecast aluminum, w/ lift lid cover		□ 7770	•	
Weather protective boot for 50A armored plug		□ 7716	•	
Weather protective boot for 50A armored connector		□ 7717	•	
Weather protective boot for 50A pro grip plug		□ 7716EX	•	
Weather protective boot for 50A pro grip connector		□ 7717EX	•	



7788CR
Corrosion
resistant



7770



7716



7717



7716EX



7717EX

Dimensional information:
C-80, C-81

Plug & connector specification information:
50A: C-92

Receptacle specification information:
50A: C-92

Flanged inlet & flanged outlet specification information:
50A: C-92

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: BK (Black), GY (Gray), RD (Red), Y or CR (Yellow)

(Black)	(Gray)	(Red)	(Yellow)	(Steel)

Compliances, specifications and availability are subject to change without notice.


Indicates NAFTA compliant - Page Q-32

RoHS compliant - Page Q-32


Industrial grade 50A locking devices

Product description

3-pole, 4-wire grounding
50A, 3Ø 480V/AC
Non-NEMA, California standard




Receptacle




Plug



CS8164



CS8169



CS8175

California standard plugs & connectors

Rating A	V/AC	Description	Cord diameter	Color	Plug catalog no.	Connector catalog no.		
50	480	3Ø pro grip nylon	0.44-1.06" (11.1-26.0mm)	RD & BK	□ CS8165EX	□ CS8164EX	•	•
		3Ø armored	0.68-1.13" (17.3-28.6mm)	Steel	□ CS8165	□ CS8164	•	•

California standard grade receptacles

Rating A	V/AC	Description	Color	Single receptacle		
50	480	3Ø California standard receptacles	BK	□ CS8169	•	•

California standard flanged inlets

Rating A	V/AC	Description	Color	Flanged inlet	Flanged inlet w/ lid		
50	480	3Ø California standard flanged inlets	Steel	□ CS8175	□ CS8177	•	•

Accessories for 50A California standard locking devices

Description	Color suffix	Catalog no.		
Weather protective glass-filled nylon, w/ lift lid cover	BK, CR, GY	□ 7788__	•	•
Weather protective diecast aluminum, w/ lift lid cover		□ 7770	•	
Weather protective boot for 50A armored plug		□ 7716	•	
Weather protective boot for 50A armored connector		□ 7717	•	
Weather protective boot for 50A pro grip plug		□ 7716EX	•	
Weather protective boot for 50A pro grip connector		□ 7717EX	•	



7788CR
Corrosion
resistant



7770



7716



7717



7716EX



7717EX

Dimensional information:
C-80, C-81

Plug & connector specification information:
50A: C-92

Receptacle specification information:
50A: C-92

Flanged inlet & flanged outlet specification information:
50A: C-92

Color ordering information:

For ordering devices, include Catalog no. followed by the Color suffix: BK (Black), GY (Gray), RD (Red), Y or CR (Yellow)

(Black)	(Gray)	(Red)	(Yellow)	(Steel)

Compliances, specifications and availability are subject to change without notice.

Indicates NAFTA compliant - Page Q-32

RoHS compliant - Page Q-32



Wet locations for 15A and 20A receptacles
NEC® 406.9

The NEC defines wet locations as installations underground or in concrete slabs or masonry in direct contact with the earth; in locations subject to saturation with water or other liquids, such as vehicle washing areas; and in unprotected locations exposed to weather.

NEC® article 406.9 (B)(1) requires all 15- and 20-ampere, 125- and 250-volt receptacles installed in a wet location to have an enclosure that is weatherproof whether or not the plug is inserted. These receptacles must use a while-in-use cover.

Applicable Arrow Hart products:

WIU-1	WIU-1D	WIU-2	WIUMV-1	WIUMH-1
-------	--------	-------	---------	---------



Wet locations for other receptacles
NEC® 406.9 (B)(2)

All other receptacles installed in a wet location shall comply with (B)(2)(a) or (B)(2)(b).

(a) A receptacle installed in a wet location, where the product intended to be plugged into it is not attended while in use, shall have an enclosure that is weatherproof with the attachment plug inserted or removed.

(b) A receptacle installed in a wet location where the product intended to be plugged into it will be attended while in use (e.g. portable tools) shall have an enclosure that is weatherproof when the attachment plug is removed.

Applicable Arrow Hart products:

WLRS1	7420CR	7770	20416D	S1952	S2966	S989
WLRS2	7420A	7788	WP1	S1954	S3966	S966
AH7879	5741NS	20446N	WP2	S2962	S992	S1966
7420	7420C	20416N	S1951	S3962	S994	S993



Damp locations for receptacles
NEC® 406.9 (A)

A damp location is defined as a location protected from weather and not subject to saturation with water or other liquids but subject to moderate degrees of moisture. Examples of such locations include partially protected locations under canopies, marquees, roofed pen porches, and like locations, and interior locations subject to moderated degrees of moisture, such as basements, barns, and cold storage buildings.

NEC® article 406.9 (A) requires receptacles installed in damp locations to have an enclosure for the receptacle that is weatherproof when the receptacle is covered (attachment plug is not inserted and receptacle cover is closed).

An installation suitable for wet locations shall also be considered suitable for damp locations.

Therefore, all catalog numbers noted for compliance to 406.9 (B)(1) and 406.9 (B)(2) are also suitable for use in damp locations.

Applicable Arrow Hart products:

S1961	S1962
-------	-------



Wet or damp locations for switches
NEC® 404.4

A surface-mounted switch or circuit breaker in a damp or wet location shall be enclosed in a weatherproof enclosure, and flush-mounted switches and circuit breakers in damp or wet locations shall be equipped with a weatherproof cover.

Applicable Arrow Hart products:

S983	S984	S2983	S3999
------	------	-------	-------

Industrial specification grade device covers

Product description

Metal and nylon covers

Weatherproof covers for 30A, 50A & 60A straight blade receptacles

Features

- UL Listed for wet locations (cover closed) and damp locations (cover open or closed)
- Meets 2014 NEC® 406.9 (A) and 406.9 (B)(2)
- Self-closing spring door assures full protection
- Gasketing material provides excellent resistance to weather

Diecast aluminum receptacle covers

Description	Catalog no.
Weatherproof lift lid cover for 4.69" (119.10mm) flush box, use box 2.125" (53.96mm) deep or larger	□ 5741NS*
Weatherproof lift lid cover for FS/FD boxes, use box 2.125" (53.96mm) deep or larger	□ 7420C

* Not UL Listed

Weatherproof covers for 50A locking devices in FS/FD boxes

Features

- UL Listed for wet locations (cover closed) and damp locations (cover open or closed)
- Meets 2014 NEC® 406.9 (A) and 406.9 (B)(2)
- Self-closing spring door assures full protection
- Gasketing material provides excellent resistance to weather

Diecast aluminum & glass-filled nylon covers

Description	Color	Catalog no.	
Diecast aluminum lift lid cover	Diecast aluminum	□ 7770	•
Glass-filled nylon lift lid cover	Y	□ 7788CR	•
Glass-filled nylon lift lid cover	BK	□ 7788BK	•
Glass-filled nylon lift lid cover	GY	□ 7788GY	•

Weatherproof covers for power-lock devices in FS/FD boxes

Features

- UL Listed for wet locations (cover closed) and damp locations (cover open or closed)
- Meets 2014 NEC® 406.9 (A) and 406.9 (B)(2)
- Self-closing spring door assures full protection
- Gasketing material provides excellent resistance to weather


Diecast aluminum & glass-filled nylon covers

Description	Color	Catalog no.	
Glass-filled nylon lift lid cover for 4-wire 30A receptacles	RD	□ 20446N*	•
Glass-filled nylon lift lid cover for 4-wire 30A receptacles	GY	□ 20416N	•
Lift lid cover for 4-wire 30A receptacles	Diecast aluminum	□ 20416D	•

* Not CSA certified

Color information:

BK (Black), GY (Gray), RD (Red), Y (Yellow)



Compliances, specifications and availability are subject to change without notice.

 Indicates NAFTA compliant - Page Q-32