

TECHNICAL DATA SHEET

ABB cable glands – MSG series

General purpose cable glands



Ideal for installations such as robot manufacturers, packaging equipment, machine tool building and other industrial OEM and MRO applications.

Certifications / Standards:**Features & Benefits:**

- Large cable clamping range
- Liquid tight mechanical grip
- Full length bushing seal protects cable

Applications:

- General purpose
- Machine building
- Maintenance and repair
- Suitable for cable types:
 - Non-armoured
 - Portable

Material:

- Steel/Zinc construction
- Neoprene Sealing
- Nylon retaining ring

Environmental ratings:**Working Temperature:**

- Normal use: -20 to +105C (-4 to +221F)

Ingress protection:

To ensure ingress protection, use suitable gasket and lock nut when required.

- Type 4x or 6 (With 5262 Series Sealing Rings)
- Wet and Dry Locations

Fire

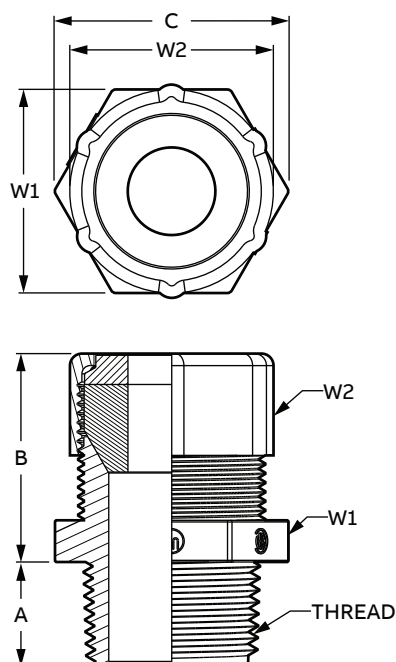
- NFPA 70 (ANSI)

Chemical resistance guide:

- See publication TDS000081

Conforms to:

- UL514B
- CSA C22.2-18.3
- ANSI C33.84
- RoHS (Restriction of Hazardous Substances Directive) 2011/65/EU Incorporating 2015/863 amendment to Annex II


Product selection

Part no:	Thread (NPT)	Cable range		Nominal dimensions				
		Min	Max	A	B	C	W1	W2
2516 †	1/4	1.52	3.18	11.68	24.83	20.98	19.05	19.05
		(0.060)	(0.125)	(0.460)	(0.978)	(0.826)	(0.750)	(0.750)
2517 †	1/4	3.05	6.35	11.68	24.83	20.98	19.05	19.05
		(0.120)	(0.250)	(0.460)	(0.978)	(0.826)	(0.750)	(0.750)
2518 †	3/8	1.52	3.81	11.68	24.83	24.71	22.23	22.23
		(0.060)	(0.150)	(0.460)	(0.978)	(0.973)	(0.875)	(0.875)
2519 † **	3/8	3.81	0.76	11.68	24.83	24.71	22.23	22.23
		(0.150)	(0.030)	(0.460)	(0.978)	(0.973)	(0.875)	(0.875)
2520	1/2	3.18	6.35	15.62	28.83	29.34	25.40	25.91
		(0.125)	(0.250)	(0.615)	(1.135)	(1.155)	(1.000)	(1.020)
2521	1/2	6.35	9.53	15.62	28.83	29.34	25.40	25.91
		(0.250)	(0.375)	(0.615)	(1.135)	(1.155)	(1.000)	(1.020)
2522	1/2	9.53	12.70	15.62	28.83	29.34	25.40	25.91
		(0.375)	(0.500)	(0.615)	(1.135)	(1.155)	(1.000)	(1.020)
2523	1/2	11.43	14.22	15.62	28.83	29.34	25.40	26.21
		(0.450)	(0.560)	(0.615)	(1.135)	(1.155)	(1.000)	(1.032)
2524 *	1/2	12.70	15.88	15.62	28.89	34.93	30.15	31.12
		(0.500)	(0.625)	(0.615)	(1.138)	(1.375)	(1.187)	(1.225)
2525 *	1/2	15.88	19.05	15.62	28.89	34.93	30.15	31.12
		(0.625)	(0.750)	(0.615)	(1.138)	(1.375)	(1.187)	(1.225)
2530	3/4	3.18	6.35	15.93	34.29	35.94	30.99	31.12
		(0.125)	(0.250)	(0.627)	(1.350)	(1.415)	(1.220)	(1.225)
2531	3/4	6.35	9.53	15.93	34.29	35.94	30.99	31.12
		(0.250)	(0.375)	(0.627)	(1.350)	(1.415)	(1.220)	(1.225)
2532	3/4	9.53	12.70	15.93	34.29	35.94	30.99	31.12
		(0.375)	(0.500)	(0.627)	(1.350)	(1.415)	(1.220)	(1.225)
2534	3/4	12.70	15.88	15.93	34.29	35.94	30.99	31.12
		(0.500)	(0.625)	(0.627)	(1.350)	(1.415)	(1.220)	(1.225)
2535	3/4	15.88	19.05	15.93	34.29	34.93	30.99	31.12
		(0.625)	(0.750)	(0.627)	(1.350)	(1.375)	(1.220)	(1.225)
2536 *	3/4	19.05	22.35	15.94	33.27	43.99	38.10	37.97
		(0.750)	(0.880)	(0.628)	(1.310)	(1.732)	(1.500)	(1.495)
2541	1	6.35	9.53	20.02	30.30	43.71	37.85	31.12
		(0.250)	(0.375)	(0.788)	(1.193)	(1.721)	(1.490)	(1.225)
2542	1	9.53	12.70	20.02	30.30	43.71	37.85	31.12
		(0.375)	(0.500)	(0.788)	(1.193)	(1.721)	(1.490)	(1.225)
2544	1	12.70	15.88	20.02	30.30	43.71	37.85	31.12
		(0.500)	(0.625)	(0.788)	(1.193)	(1.721)	(1.490)	(1.225)
2545	1	15.88	19.05	20.02	30.30	18.31	37.85	31.12
		(0.625)	(0.750)	(0.788)	(1.193)	(0.721)	(1.490)	(1.225)
2546	1	19.05	22.35	20.03	35.69	43.99	38.10	37.97
		(0.750)	(0.880)	(0.789)	(1.405)	(1.732)	(1.500)	(1.495)
2547	1	22.23	25.02	20.03	35.69	43.99	38.10	37.97
		(0.875)	(0.985)	(0.789)	(1.405)	(1.732)	(1.500)	(1.495)
2548 *	1	22.35	27.05	19.84	40.49	56.82	49.21	48.26
		(0.880)	(1.065)	(0.781)	(1.594)	(2.237)	(1.938)	(1.900)
2549 *	1	27.05	30.61	19.84	40.49	56.82	49.21	48.26
		(1.065)	(1.205)	(0.781)	(1.594)	(2.237)	(1.938)	(1.900)
2558	1-1/4	22.35	27.05	20.41	34.37	56.82	49.21	48.26
		(0.880)	(1.065)	(0.804)	(1.353)	(2.237)	(1.938)	(1.900)

* Remove sufficient outer jacket of the cable joint to permit conductors to pass through fitting body

† Not UL listed

** Not CSA certified

Fittings used in a trade size knockout requiring a Type 4x or 6 listing require a 5262 Series sealing ring. Dimensions for reference only.

Bold numbers are metric, parenthesis numbers are inches.

Note: Product must be installed in accordance with applicable national and local electrical codes.