

Ground clamps

Type GUV – U-Bolt ground clamps



Excellent for connecting multiple electrodes with a single cable, such as in substation grounding.

- For connecting copper or copper-clad steel grounding conductor to ground rod or pipe


- Specially designed spacer provides proper alignment between cable and electrode and affords more positive contact area
- All components cast or forged from copper alloy
- UL® 467 Listed for direct burial

Type GUV – U-Bolt ground clamps



Cat. no.*	Cu conductor range (AWG)		Nominal rod size (in)		IPS pipe size		Dimensions (in.)		
	Max.	Min.	Max.	Min.	Max.	Min.	A	B	C
GUV584	4	8	3/4	5/8	3/8	—	2 ¹³ / ₁₆	1 ⁹ / ₁₆	2 ¹ / ₄
GUV5821	2/0	4	3/4	5/8	3/8	—	2 ¹³ / ₁₆	1 ⁹ / ₁₆	2 ¹ / ₄
GUV5825	250	2/0	3/4	5/8	3/8	—	2 ¹³ / ₁₆	1 ⁹ / ₁₆	2 ¹ / ₄
GUV784	4	8	1	7/8	3/4	1/2	2 ³ / ₄	1 ⁹ / ₁₆	2 ⁵ / ₈
GUV7821	2/0	4	1	7/8	3/4	1/2	2 ³ / ₄	1 ⁹ / ₁₆	2 ⁵ / ₈
GUV7825	250	2/0	1	7/8	3/4	1/2	2 ³ / ₄	1 ⁹ / ₁₆	2 ⁵ / ₈
GUV1184	4	8	1 ¹ / ₄	1 ¹ / ₈	1	—	3 ⁵ / ₁₆	1 ⁹ / ₁₆	2 ³ / ₄
GUV11821	2/0	4	1 ¹ / ₄	1 ¹ / ₈	1	—	3 ⁵ / ₁₆	1 ⁹ / ₁₆	2 ³ / ₄
GUV1384	4	8	1 ¹ / ₂	1 ³ / ₈	1 ¹ / ₄	—	3 ⁷ / ₁₆	1 ⁹ / ₁₆	2 ¹⁵ / ₁₆
GUV13821	2/0	4	1 ¹ / ₂	1 ³ / ₈	1 ¹ / ₄	—	3 ⁷ / ₁₆	1 ⁹ / ₁₆	2 ¹⁵ / ₁₆
GUV13825	250	2/0	1 ¹ / ₂	1 ³ / ₈	1 ¹ / ₄	—	3 ⁷ / ₁₆	1 ⁹ / ₁₆	2 ¹⁵ / ₁₆
GUV1584	4	8	1 ⁷ / ₈	1 ⁵ / ₈	1 ¹ / ₂	—	3 ¹⁵ / ₁₆	1 ⁹ / ₁₆	3 ³ / ₁₆
GUV15821	2/0	4	1 ⁷ / ₈	1 ⁵ / ₈	1 ¹ / ₂	—	3 ¹⁵ / ₁₆	1 ⁹ / ₁₆	3 ³ / ₁₆
GUV15825	250	2/0	1 ⁷ / ₈	1 ⁵ / ₈	1 ¹ / ₂	—	3 ¹⁵ / ₁₆	1 ⁹ / ₁₆	3 ³ / ₁₆
GUV204	4	8	2 ³ / ₈	2	2	—	4 ⁷ / ₁₆	1 ⁹ / ₁₆	3 ¹¹ / ₁₆
GUV2021	2/0	4	2 ³ / ₈	2	2	—	4 ⁷ / ₁₆	1 ⁹ / ₁₆	3 ¹¹ / ₁₆
GUV2025	250	2/0	2 ³ / ₈	2	2	—	4 ⁷ / ₁₆	1 ⁹ / ₁₆	3 ¹¹ / ₁₆
GUV21221	2/0	4	2 ⁷ / ₈	2 ¹ / ₂	2 ¹ / ₂	—	4 ¹⁵ / ₁₆	1 ⁹ / ₁₆	4 ³ / ₁₆
GUV21225	250	2/0	2 ⁷ / ₈	2 ¹ / ₂	2 ¹ / ₂	—	4 ¹⁵ / ₁₆	1 ⁹ / ₁₆	4 ³ / ₁₆
GUV3021	2/0	4	3 ¹ / ₂	3	3	—	5 ⁹ / ₁₆	1 ⁹ / ₁₆	4 ¹³ / ₁₆
GUV3025	250	2/0	3 ¹ / ₂	3	3	—	5 ⁹ / ₁₆	1 ⁹ / ₁₆	4 ¹³ / ₁₆
GUV31221	2/0	4	4	3 ¹ / ₂	3 ¹ / ₂	—	6 ¹ / ₁₆	1 ⁹ / ₁₆	5 ¹ / ₂
GUV4021	2/0	4	4 ¹ / ₂	4	4	—	6 ⁵ / ₁₆	1 ⁹ / ₁₆	5 ¹¹ / ₁₆
GUV4025	250	2/0	4 ¹ / ₂	4	4	—	6 ⁵ / ₁₆	1 ⁹ / ₁₆	5 ¹¹ / ₁₆

Diagrams

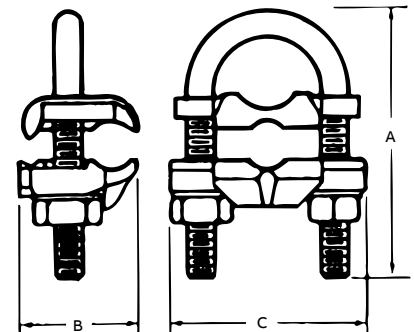

* For tin plating, add suffix P to cat. no. Contact factory for price and availability.
UL does not list tin-plated bronze grounding devices.